



European manufacturer of swimming pool  
dehumidifiers and heat pumps,  
germicidal air purifiers.



# Price List

2021

VERSION  
02/2021

Swimming pool HEATING & DEHUMIDIFICATION solutions

UV Air Disinfection systems

Valid from: JUNE 16, 2021

# WHY MICROWELL?

VARIETY OF MODELS

WIDEST RANGE OF DESIGN AND ACCESSORIES

EXCELLENT CRAFTSMANSHIP AND EXPERIENCE

INNOVATIVE ENGINEERING, CUTTING EDGE ROBOTICS

EUROPEAN QUALITY, LOCATED IN SLOVAKIA

750+ PARTNERS IN 35+ COUNTRIES

COMPETITIVE PRICES

ACCREDITED BY ISO 9001, ISO 14001, ISO 45001



Ing. Tibor Kovács, CEO

## Dear Business Partner,

You are holding our Microwell 2021 Pricelist in your hands. As you may have noticed over the past years, this "bouquet" of products of ours is more varied and colorful each year. Every year there are items that leave the product lines and get replaced with more enhanced, innovative and up to date versions, and also new ones to surprise our valued customers. It is no different in 2021 either.


A worldwide COVID-19 pandemic was the initiator of launching our new product named ATHMOSS. This new machine was given a "coat" of our popular dehumidifier DRY 300/400 Wave, that our international partners are already familiar with. The difference lies inside, under the "coat", as there is no fight with humidity but with our currently biggest worldwide enemy: the insidious deadly virus. Great customer response and gradually increasing orders are showing us that Microwell has succeeded again in creating something useful and highly requested by people in these very challenging and difficult times we are all facing.

Remarkable and significant changes have occurred in our Microwell swimming pool heat pumps' range too.

We extended our HP inverter line and replaced the obsolete R410 refrigerant with an environmentally friendly R32 type to keep up with the increasing ecological awareness. A fact that this is not only a phrase is proven by our expanding international sales network. We are happy about adding 5 new countries into it in 2020: Kenya, Philippines, Bahrain, Moldova and Sweden.

Over 35 countries worldwide know MICROWELL brand and we truly hope that this number will keep on growing in the future.

We hope that you will frequently search for data in this pricelist and find an appropriate solution for your and your customers' needs.

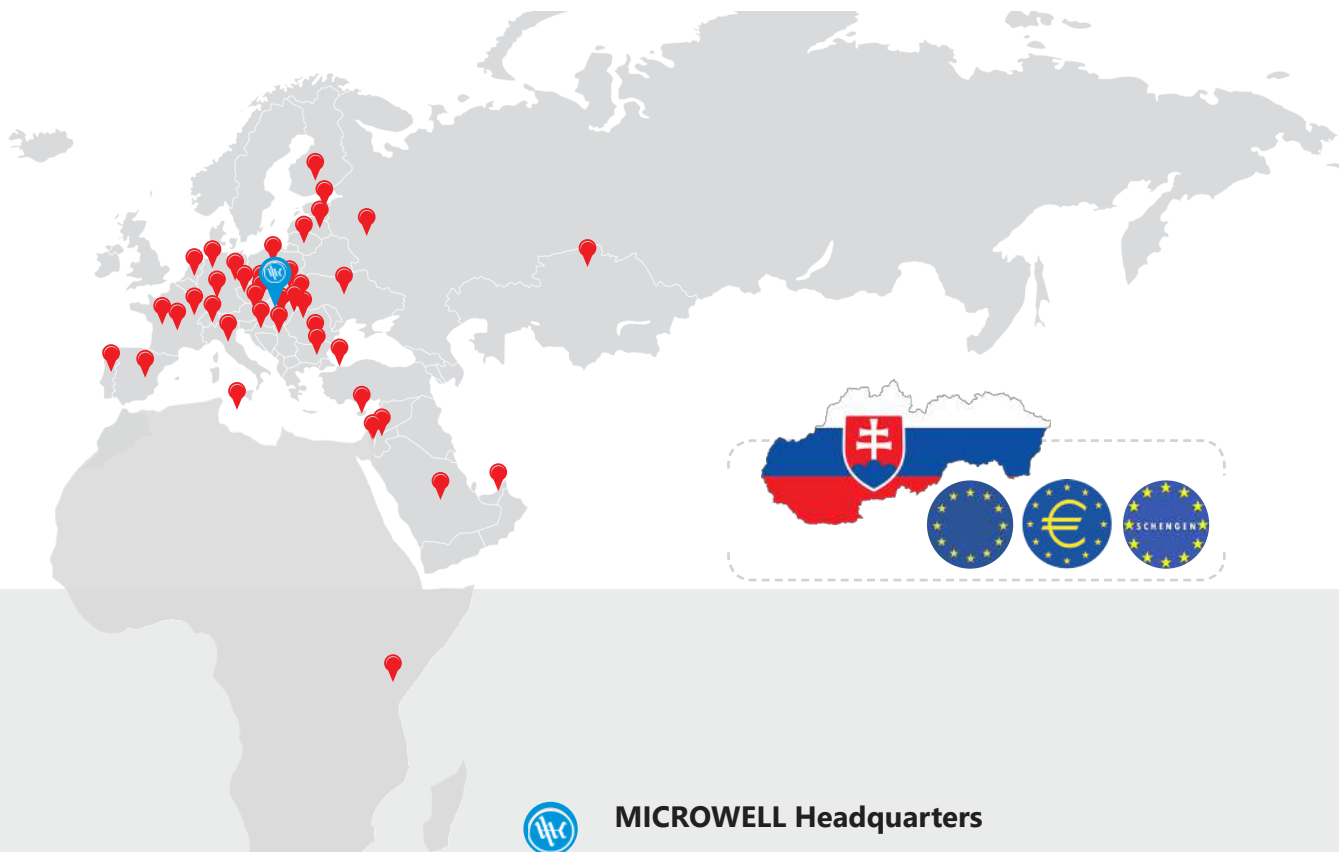

### MICROWELL Headquarters

Microwell operates in 3 business divisions /Dehumidification, Heating and UV Air Disinfection Solutions, Measurement and Control, Air conditioning and Ventilation/, employs 70 employees in 5 Branch offices in 3 countries: Slovakia, Czech republic, Hungary/. The company has own manufacturing facilities, warehouse, R&D department.



The core strength of Dehumidification, Heating and UV Air Disinfection Solutions Division is its R&D team, that works hard to find new solutions or innovations in Inverter control system technology as well as in WIFI regulation of Microwell products. They developed the fully new product - ATHMOSS Germicidal Air Purifier, closed germicidal air disinfectant, equipped with a HEPA filter. This unique machine eliminates viruses and bacteria within 5 minutes.



### Production & warehouse

Primary manufacturing facility located in 3.000m<sup>2</sup> venue. Office extends over 1.260m<sup>2</sup>.



# Germicidal Air Purifiers Pages 6 - 9

ATHMOSS germicidal air purifier /max. 90W performance/

ATHMOSS 120 OFFICE  
ATHMOSS 120 INDUSTRY



## Dehumidifiers

## Pages 10 - 27

### SWIMMING POOL DEHUMIDIFIERS on the wall, on the floor, behind the wall

|                |                               |       |
|----------------|-------------------------------|-------|
| DRY 300 WAVE   |                               |       |
| DRY 300 METAL  |                               |       |
| DRY 300 SILVER | 30m <sup>2</sup> /36l         | 12-13 |
| DRY 400 WAVE   |                               |       |
| DRY 400 METAL  |                               |       |
| DRY 400 SILVER | 45m <sup>2</sup> /48l         | 14-15 |
| DRY 500 WAVE   |                               |       |
| DRY 500 METAL  |                               |       |
| DRY 500 SILVER | 60m <sup>2</sup> /66l         | 16-17 |
| DRY 800 METAL  |                               |       |
| DRY 1200 METAL | 90-120m <sup>2</sup> /90-120l | 18    |

### SWIMMING POOL DEHUMIDIFIERS ducted

|               |  |       |
|---------------|--|-------|
| DRY 300 DUCT  |  |       |
| DRY 400 DUCT  |  |       |
| DRY 500 DUCT  |  |       |
| DRY 800 DUCT  |  |       |
| DRY 1200 DUCT |  | 19-23 |

### SWIMMING POOL DEHUMIDIFIERS ceiling mounted

|                      |                               |       |
|----------------------|-------------------------------|-------|
| DRY SIREN SMART MONO | 60-120m <sup>2</sup> /67-134l |       |
| DRY SIREN SMART DUE  |                               | 24-25 |

### DEHUMIDIFIERS FOR GALLERIES

|             |  |    |
|-------------|--|----|
| DRY GALLERY |  | 26 |
|-------------|--|----|

### DEHUMIDIFIERS FOR INDUSTRY

|                     |  |    |
|---------------------|--|----|
| T40   T90   T120    |  |    |
| TE40   TE90   TE120 |  | 27 |



## Heat pumps

## Pages 28 - 47

### SWIMMING POOL HEAT PUMPS ON/OFF /up to 95 m<sup>3</sup>/

|               |                         |    |
|---------------|-------------------------|----|
| HP 1000 GREEN | 9.2kW/45m <sup>3</sup>  | 30 |
| HP 1400 GREEN | 12.3kW/55m <sup>3</sup> | 30 |
| HP 1700 GREEN | 16.2kW/70m <sup>3</sup> | 31 |

### SWIMMING POOL HEAT PUMPS INVERTER /up to 135 m<sup>3</sup>/

|  |                        |    |
|--|------------------------|----|
| HP 1100 GREEN Inverter Pro Compact / Split | 10kW/40m <sup>3</sup>  | 32 |
| HP 1500 GREEN Inverter Pro Compact / Split | 15kW/60m <sup>3</sup>  | 33 |
| HP 1700 GREEN Inverter Pro Compact / Split | 17kW/95m <sup>3</sup>  | 34 |
| HP 2100 GREEN Inverter Pro Compact / Split | 24kW/105m <sup>3</sup> | 36 |
| HP 2700 GREEN Inverter Pro Compact / Split | 31kW/135m <sup>3</sup> | 37 |

### SWIMMING POOL HEAT PUMPS ON/OFF for larger pools /up to 120 m<sup>3</sup>/

|                          |                        |       |
|--------------------------|------------------------|-------|
| HP 2300 COMPACT Inventor | 23kW/80m <sup>3</sup>  |       |
| HP 2300 SPLIT Inventor   |                        | 38-39 |
| HP 2400 COMPACT Premium  | 24kW/80m <sup>3</sup>  |       |
| HP 2400 SPLIT Premium    |                        | 40-41 |
| HP 2800 COMPACT Inventor | 28kW/120m <sup>3</sup> |       |
| HP 2800 SPLIT Inventor   |                        | 42-43 |
| HP 3000 COMPACT Premium  | 30kW/120m <sup>3</sup> |       |
| HP 3000 SPLIT Premium    |                        | 44-45 |

### COMMERCIAL SWIMMING POOL HEAT PUMPS INVERTER /up to 520 m<sup>3</sup>/

|          |                                |    |
|----------|--------------------------------|----|
| iMax 60  |                                |    |
| iMax 110 | 60-115kW/260-520m <sup>3</sup> | 46 |



## Accessories & Spare parts

## Pages 48 - 63

|  |    |
|--|----|
| QMAX-HEAT PUMP TESTER  | 49 |
| HUMIDITY VISUALIZATION microLIGHT+                               | 51 |
| INSTALLATION MATERIAL AND EQUIPMENT FOR INSTALLATION AND SERVICE | 53 |
| SPARE PARTS  | 56 |
| WATER SURFACE COVER  | 61 |
| VENTILATION  | 62 |

SUPER SILENT mode

Introducing our range of full stepless inverter heat pumps with SUPER SILENT mode. We limit the compressor and fan to max. 65% of their nominal capacity by SUPER SILENT mode while market standard is high 80%. This provides heating at unprecedented low noise enabling installation practically at your neighbors door.

Heat pumps can be automatically set over WiFi to operate at maximum during day time and SUPER SILENT during night time. Check it out on **pages 32-37**.



COMMERCIAL INVERTER iMAX

COMMERCIAL heat pumps iMAX  
60-110kW

In 2020 we launched powerful pool heat pumps with Inverter technology for commercial application.

Capacity: 125 ~ 520m<sup>3</sup>

Commercial Inverter iMax line is primarily designed for public/commercial applications such as public pools, hotel pools, school pools. Multiple units could be used to serve bigger volumes. More on **page 46**.

POWERFUL AIR CLEANING & DISINFECTION  
ATHMOSS

Powerful yet elegant air cleaning. Germicidal air purifier eliminates

- viruses
- bacteria
- mould
- pollen

Suitable for room size 15 ~ 600m<sup>3</sup>.

ATHMOSS disinfects in the presence of humans.

Find more about professional air purifier based on UV-C radiation on **pages 6-9**.



# GERMICIDAL AIR PURIFIERS

For offices, waiting rooms, retirement houses, event, fitness and shopping centers  
For industry premises, production halls



GET YOUR AIR CLEANED  
WITHIN 5 MINUTES !



in 25m<sup>3</sup> room,  
resp. 9m<sup>2</sup>



in 50m<sup>3</sup> room,  
resp. 16m<sup>2</sup>



in 100m<sup>3</sup> room,  
resp. 36m<sup>2</sup>



in 600m<sup>3</sup> room,  
resp. 225m<sup>2</sup>

ATHMOSS 



| Series                               | ATHMOSS 120                          | ATHMOSS 120                          |
|--------------------------------------|--------------------------------------|--------------------------------------|
| Model                                | INDUSTRY                             | OFFICE                               |
| Recommended size of disinfected area | 25-600 m <sup>3</sup>                | 15-450 m <sup>3</sup>                |
| Dimensions /WxHxD/                   | 770 x 660 x 260 mm                   |                                      |
| Weight                               | 21.5 kg                              | 20.5 kg                              |
| Cover                                | Acrylic, white                       |                                      |
| Noise level                          | 39.1 dB(A) MIN<br>58.2 dB(A) MAX     | 33.5 dB(A) MIN<br>45.8 dB(A) MAX     |
| Air flow                             | 50-700 m <sup>3</sup> /h, adjustable | 50-495 m <sup>3</sup> /h, adjustable |
| Power supply                         | 230V AC/50Hz/1ph                     |                                      |
| Consumption                          | 188-237 W                            | 95-100-152W                          |
| Number and performance of UV-C tubes | 6 x 15 W /253.7 nm UV-C/             |                                      |
| Operating life-time of UV-C tubes    | <9000h                               |                                      |
| Prefilter                            | Class G3 >10µm                       |                                      |
| HEPA filter                          | Class H11 >0.3µm, 95%                |                                      |

Manufacturer notice: Manufacturer reserves the right to change the technical parameters without notice.

**ATHMOSS germicidal air purifier cleans the air by eliminating unwanted microorganisms and disinfects it.**

The operation is UV-C radiation based. This radiation damages the DNA of viruses and microbes that causes their complete destruction.

High reflectiveness and deceleration of air in MICROWELL disinfection chamber leads to longer stay of viruses in this area, that increases their UV-C exposition. This way ATHMOSS provides a very efficient air cleaning.

90W  
495 m<sup>3</sup>**ATHMOSS 120 OFFICE***Quiet, yet effective.*90W  
700 m<sup>3</sup>**ATHMOSS 120 INDUSTRY***Powerful without compromise.*

|                                    |                          |                          |
|------------------------------------|--------------------------|--------------------------|
| Cover                              | Acrylic, white           |                          |
| UV-C tubes                         | 6x15W /253,7 nm/         |                          |
| Air flow                           | 50-495 m <sup>3</sup> /h | 50-700 m <sup>3</sup> /h |
| Prefilter                          | Class G3 >10 µm          |                          |
| HEPA filter                        | Class H11 >0,3 µm, 95%   |                          |
| microMETAL+ stainless steel filter |                          |                          |
| Power supply                       | 230V AC/50Hz/1f          |                          |

ATHMOSS **ATHMOSS 120 O** - **1.****ATHMOSS 120 I** - **1.**


| Basic equipment:  | Model:                      | Price EXW Sala, SK<br>w/o VAT |
|---|-----------------------------|-------------------------------|
| Germicidal air purifier, wall console, 90W UV-C <9.000hrs, G3 prefilter, H11 95% HEPA filter, microMETAL+ stainless steel filter, user's manual | <b>ATHMOSS 120 OFFICE</b>   | <b>1 980 €</b>                |
|   | <b>ATHMOSS 120 INDUSTRY</b> | <b>2 150 €</b>                |

**1. Installation:**

|   |              |
|---|--------------|
| <b>S</b> Standard: on the wall  | <b>0 €</b>   |
| <b>M</b> Mobile stand (vertically adjustable 145-185cm), RAL9010 white, 4 wheels (2 lockable):<br><i>/Rebate does not apply on this item. This is the actual purchase price./</i> | <b>115 €</b> |
| <b>P</b> Through-the-wall installation (Fiberglass cover with through-the-wall ducts set and removable aluminium grills, metal duct galvanized, wall thickness >400mm, insulated) | <b>385 €</b> |

**1-M**

| Spare parts:   | Price EXW Sala, SK<br>w/o VAT |
|--|-------------------------------|
| Spare Disinfection chamber with 90W UV-C, with microMETAL+ stainless steel filter and HEPA filter H11                          | <b>760 €</b>                  |
| HEPA filter H11, 1pc, >0.3µm, 95%<br><i>/Rebate does not apply on this item. This is the actual purchase price./</i>           | <b>15 €</b>                   |
| Pre-filter class G3, package of 3pcs, >10µm<br><i>/Rebate does not apply on this item. This is the actual purchase price./</i> | <b>9 €</b>                    |

**1-P**

**EURO PALETTE** packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

**ATHMOSS=STOP**  **viruses**





**ATHMOSS 120**

# Germicidal air purifier

Highly efficient air purifier based on UV-C radiation equipped with HEPA filter providing maximum protection.

- |   |   |
|---|---|
| <p><b>01</b> Cleans and disinfects the air</p> <p><b>02</b> Destroys viruses, bacteria and other microorganisms in the air</p> <p><b>03</b> Filters harmful particles such as dirt, dust, pollen, etc.</p> <p><b>04</b> Safe use even in presence of people</p> | <p><b>Operates on UV-C radiation principle</b></p> <p><b>Consists of 6 powerful UV-C lamps</b></p> <p><b>Achieves max. 90W performance</b></p> <p><b>Available in 2 versions: OFFICE and INDUSTRY</b></p> |
|---|---|



## USE

ATHMOSS germicidal air purifier can be safely used wherever a larger group of people gather indoors.

- Banks, post offices
- Waiting rooms, ambulances, pharmacies
- Retirement houses
- Schools and nursery schools
- Fitness centers, closed sport centers
- Culture centers, Event centers
- Shopping centers, Public catering, etc.



MICROWELL, spol. s r.o.  
 SNP 2018/42, Šaľa, SLOVAKIA



(+421) 31 7707082  
 (+421) 911 413 990



export@microwell.sk

[www.athmoss.eu](http://www.athmoss.eu)



# DEHUMIDIFIERS

For swimming pools   For galleries   For industry



| Series                 | Model  | Pool surface<br>m <sup>2</sup> | Extraction rate<br>l/24hrs<br>/60% RH, 30°C/ | Extraction rate<br>l/24hrs<br>/80% RH, 30°C/ | Air flow<br>m <sup>3</sup> /h | Noise level<br>(at 1 m dist.)<br>dB (A) | Power consump.<br>W | Heating output<br>W | Dimensions netto<br>(W x H x D)<br>mm | Weight netto<br>kg |
|------------------------|--------|--------------------------------|--|--|-------------------------------|---|---------------------|---------------------|---------------------------------------|--------------------|
| <b>DRY 300</b>         | WAVE   | 30                             | 36   | 48   | 550                           | 42                                      | 700                 | 1900                | 780 x 660 x 255                       | 40                 |
|                        | SILVER |                                |  |  |                               |   |                     |                     | 780 x 642 x 300                       | 50                 |
|                        | METAL  |                                |  |  |                               |   |                     |                     | 780 x 642 x 300                       | 50                 |
|                        | TTW    |                                |  |  |                               |   |                     |                     | 880 x 658 x 240                       | 56                 |
|                        | DUCT   |                                |  |  |                               |   |                     |                     | 880 x 658 x 240                       | 56                 |
| <b>DRY 400</b>         | WAVE   | 45                             | 48   | 58   | 600                           | 42                                      | 700                 | 1900                | 780 x 660 x 255                       | 40                 |
|                        | SILVER |                                |  |  |                               |   |                     |                     | 780 x 642 x 300                       | 50                 |
|                        | METAL  |                                |  |  |                               |   |                     |                     | 780 x 642 x 300                       | 50                 |
|                        | TTW    |                                |  |  |                               |   |                     |                     | 880 x 658 x 240                       | 56                 |
|                        | DUCT   |                                |  |  |                               |   |                     |                     | 880 x 658 x 240                       | 56                 |
| <b>DRY 500</b>         | WAVE   | 60                             | 66   | 101  | 800                           | 44                                      | 1000                | 3500                | 1245 x 660 x 255                      | 60                 |
|                        | SILVER |                                |  |  |                               |   |                     |                     | 1245 x 642 x 300                      | 77                 |
|                        | METAL  |                                |  |  |                               |   |                     |                     | 1245 x 642 x 300                      | 77                 |
|                        | TTW    |                                |  |  |                               |   |                     |                     | 1245 x 660 x 255                      | 60                 |
|                        | DUCT   |                                |  |  |                               |   |                     |                     | 1250 x 660 x 250                      | 78                 |
| <b>DRY 800</b>         | METAL  | 90                             | 90   | 136  | 1100                          | 46                                      | 1600                | 5100                | 1250 x 950 x 310                      | 100                |
|                        | TTW    | 90                             | 90   | 136  | 1100                          | 46                                      | 1600                | 5100                | 1247 x 950 x 300                      | 100                |
|                        | DUCT   | 80                             | 88   | 135  | 1100/170Pa                    | 58                                      | 1700                | 5100                | 1247 x 950 x 300                      | 102                |
| <b>DRY 1200</b>        | METAL  | 120                            | 120  | 181  | 1200                          | 46                                      | 2150                | 5250                | 1250 x 950 x 310                      | 101                |
|                        | TTW    | 120                            | 120  | 181  | 1200                          | 46                                      | 2150                | 5250                | 1247 x 950 x 300                      | 103                |
|                        | DUCT   | 110                            | 112  | 170  | 1200/145Pa                    | 60                                      | 2250                | 5250                | 1247 x 950 x 300                      | 103                |
| <b>DRY SIREN Smart</b> | MONO   | 60                             | 67   | 104  | 1000                          | 35                                      | 1000                | 4500                | Ø 1210 x 278                          | 53+20              |
|                        | DUE    | 120                            | 134  | 208  | 2000                          | 35                                      | 2300                | 8750                | 2x Ø 1210x 278                        | 2x53+30            |

The manufacturer reserves the right to change the parameters without notice.

**Awards:**



Product of the year 2005  
**DRY 300 PLASTIK**



Product of the year 2008  
**DRY 500 PLASTIK**



Product of the year 2014  
**HP 1200 COMPACT Premium**



Recognition prize 2014  
**DRY 500 DUCT**



The BEST EXHIBIT award 2017  
**DRY SIREN**




Recognition prize 2017  
**DRY SIREN**



36 l  
30 m<sup>2</sup>

## DRY 300 WAVE

| Cover           | Extraction rate<br>(30°C/60% RH<br>- 35°C/95% RH) | Air flow                 |
|-----------------|---|--------------------------|
| plastic (acryl) | 36-63 l/24hrs                                     | 550 m <sup>3</sup> /hour |

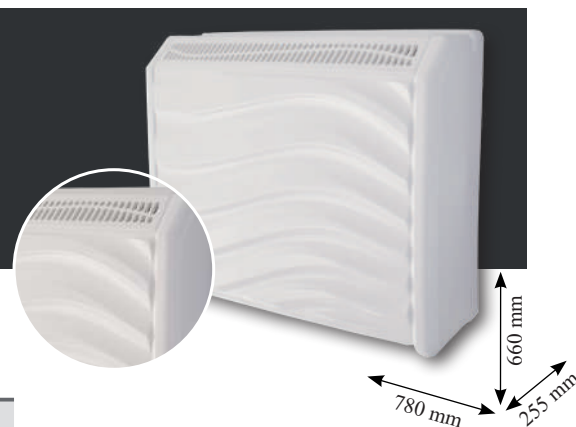

### DRY 300W - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8.

#### Basic equipment:

Price EXW  
w/o VAT /EUR/

Dehumidifier, wall console, user's manual, installation layout, fixation screws

micro COMPRESSOR+ ultra QUIET+ easy INSTALL+



2 290

#### 1. Installation:

|  |     |
|--|-----|
| <b>S</b> standard: on the wall   | 0   |
| <b>M</b> mobile stand, 4 wheels, white color (RAL 9010), 230V EURO plug, 2m  | 218 |
| <b>P</b> through-the-wall INDOOR INSTALLATION (fiberglass cover with through-the-wall ducts set and removable grills, metal ducts galvanized, insulated) | 385 |
| <b>T Premium</b> through-the-wall INDOOR INSTALLATION (metal powder coated cover, wall ducts, removable grills, metal ducts galvanized, insulated)       | 725 |
| <b>E</b> through-the-wall OUTDOOR INSTALLATION (40mm TTW external aluminum and rubber insulation, winter module, condensate tray defrost, -15°C)         | 885 |

#### 2. Control:

|  |     |
|--|-----|
| <b>S</b> standard: built-in mechanical humidistat  | 0   |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat | 345 |
| <b>W6</b> remote wired humidistat EBERLE HYG6001+built-in mechanical humidistat                | 119 |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat   | 129 |

#### 3. Air temperature:

|  |     |
|--|-----|
| <b>S</b> standard: +22°C...+35°C                           | 0   |
| <b>T</b> +15°C...+35°C (with antifreeze thermostat)        | 57  |
| <b>V</b> +22°C...+42°C (with thermostatic expansion valve) | 259 |
| <b>A</b> +15°C...+42°C (T+V)                               | 279 |
| <b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)   | 385 |

#### 4. Air heating:

|   |     |
|---|-----|
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)  | 0   |
| <b>H</b> LPHW, 3.5 kW, without regulation, contact for external thermostat 230V/5A  | 228 |
| <b>V</b> LPHW, 3.5 kW, with solenoid valve (in standard version – external contact 230V/5A) (with EASY 300 – fully automatic regulation + no current contact) | 442 |

|                                  |     |
|----------------------------------|-----|
| <b>E</b> Electrical heating 2 kW | 486 |
|----------------------------------|-----|

#### 5. LPHW connection:

|                                       |   |
|---------------------------------------|---|
| <b>S</b> standard: N/A (without LPHW) | 0 |
| <b>B</b> from the back                | 0 |
| <b>R</b> from right                   | 0 |
| <b>L</b> from left                    | 0 |

#### 6. micro LIGHT+

|  |     |
|--|-----|
| <b>S</b> standard: without Pool Security microLIGHT+ | 0   |
| <b>L</b> Pool Security microLIGHT+                   | 147 |


#### 7. Air filter:

|  |    |
|--|----|
| <b>S</b> standard: without air filter  | 0  |
| <b>F</b> Air filter (for model with wall or mobile stand installation: 1-S/M option) | 52 |
| <b>C</b> Air filter grid (for model with TTW installation: 1-P/E option)             | 52 |

#### 8. Fresh air supply:

|  |    |
|--|----|
| <b>S</b> standard: without fresh air supply          | 0  |
| <b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized | 35 |

EURO PALETTE packed, FUMIGATED  
6€/1pc (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

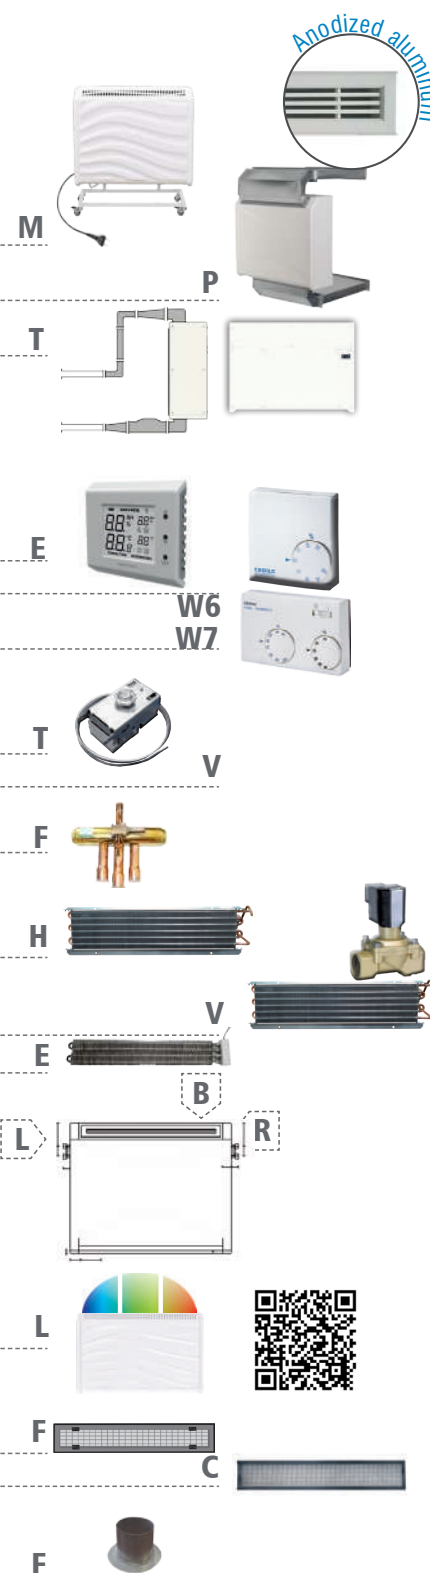

Anodized aluminum



36 l  
30 m<sup>2</sup>

**DRY 300 METAL | DRY 300 SILVER**

| Cover         | Cover           | Extraction rate                | Air flow                 |
|---------------|-----------------|--------------------------------|--------------------------|
| DRY 300 METAL | DRY 300 SILVER  | (30°C/60% RH<br>- 35°C/95% RH) |                          |
| metal         | stainless steel | 36-63 l/24hrs                  | 550 m <sup>3</sup> /hour |



**DRY 300M**



**DRY 300S**

642 mm  
780 mm  
300 mm

**DRY 300M** - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.


**DRY 300S** - - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.



| Basic equipment:  | Model:                | Price EXW<br>w/o VAT /EUR/ |
|---|-----------------------|----------------------------|
| Dehumidifier, wall console, user's manual<br>installation layout, fixation screws | <b>DRY 300 METAL</b>  | <b>2 730</b>               |
| <b>micro COMPRESSOR+</b> <b>ultra QUIET+</b> <b>easy INSTALL+</b>                 | <b>DRY 300 SILVER</b> | <b>2 930</b>               |



| 1. Color options:  |  |                 |
|--|--|-----------------|
| <b>S</b> standard: silver color „Tiger“  |  | 0               |
| <b>W</b> white (RAL9010) glossy  |  | 0               |
| <b>C</b> color selection according to your preference (RAL code)   |  | price on demand |
| 2. Installation:   |  |                 |
| <b>S</b> standard: on the wall   |  | 0               |
| <b>M</b> mobile stand, 4 wheels, color: silver „Tiger“, white (RAL 9010), 230V EURO plug, 2m   |  | 218             |
| 3. Control:  |  |                 |
| <b>S</b> standard: built-in digital humidistat & thermostat<br>+ built-in mechanical humidistat  |  | 0               |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300<br>+ built-in mechanical humidistat (without built-in digital humidistat & thermostat) |  | 345             |
| <b>W6</b> remote wired humidistat EBERLE HYG6001<br>+ built-in mechanical humidistat (without built-in digital humidistat & thermostat)              |  | 79              |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+ built-in<br>mechanical humidistat (without built-in digital humidistat & thermostat)  |  | 88              |
| 4. Air temperature:  |  |                 |
| <b>S</b> standard: +22°C...+35°C   |  | 0               |
| <b>T</b> +15°C...+35°C (with antifreeze thermostat)  |  | 57              |
| <b>V</b> +22°C...+42°C (with thermostatic expansion valve)   |  | 259             |
| <b>A</b> +15°C...+42°C (T+V)   |  | 279             |
| <b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)   |  | 385             |
| 5. Air heating:  |  |                 |
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)   |  | 0               |
| <b>H</b> LPHW, 3.5 kW, without regulation (external no current contact)  |  | 228             |
| <b>V</b> LPHW, 3.5 kW, fully automatic regulation (with solenoid valve + external no current contact)  |  | 442             |
| <b>E</b> Electrical heating 2 kW   |  | 486             |
| 6. LPHW connection:  |  |                 |
| <b>S</b> standard: N/A (without LPHW)  |  | 0               |
| <b>B</b> from the back   |  | 0               |
| <b>R</b> from right  |  | 0               |
| <b>L</b> from left   |  | 0               |
| 7. micro LIGHT+  |  |                 |
| <b>S</b> standard: without Pool Security microLIGHT+   |  | 0               |
| <b>L</b> Pool Security microLIGHT+   |  | 147             |
| 8. Air filter:   |  |                 |
| <b>S</b> standard: without air filter  |  | 0               |
| <b>F</b> Air filter  |  | 52              |
| 9. Fresh air supply:   |  |                 |
| <b>S</b> standard: without fresh air supply  |  | 0               |
| <b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized   |  | 35              |

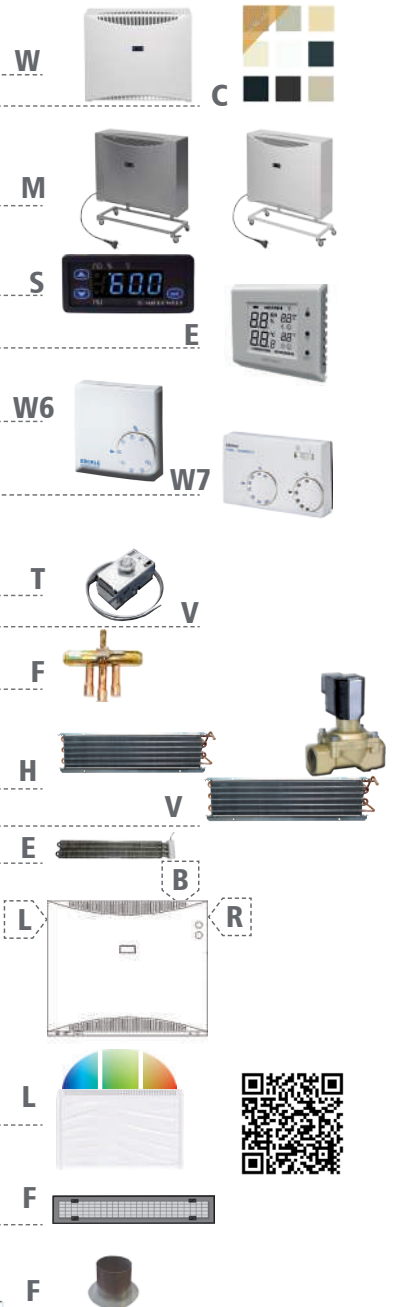

**EURO PALETTE** packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)




v. 02/2021



48 l  
45 m<sup>2</sup>

# DRY 400 WAVE

| Cover           | Extraction rate<br>(30°C/60% RH<br>~ 35°C/95% RH) | Air flow                 |
|-----------------|---|--------------------------|
| plastic (acryl) | 45-78 l/24hrs                                     | 600 m <sup>3</sup> /hour |

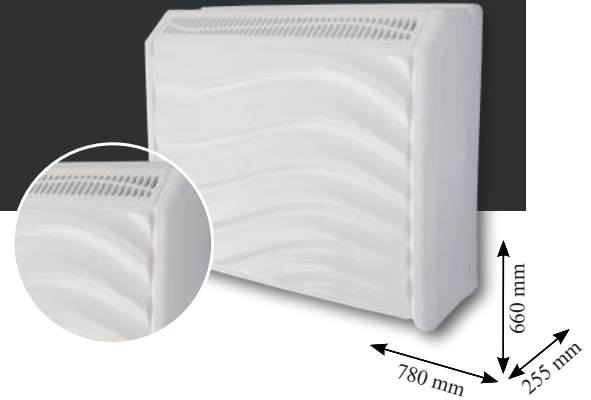

## DRY 400W - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8.

**Basic equipment:** Price EXW w/o VAT /EUR/

Dehumidifier, wall console, user's manual, installation layout, fixation screws

micro COMPRESSOR+ ultra QUIET+ easy INSTALL+



**2 590**

### 1. Installation:

|  |     |
|--|-----|
| <b>S</b> standard: on the wall   | 0   |
| <b>M</b> mobile stand, 4 wheels, white color (RAL 9010), 230V EURO plug, 2m  | 218 |
| <b>P</b> through-the-wall INDOOR INSTALLATION (fiberglass cover with through-the-wall ducts set and removable grills, metal ducts galvanized, insulated) | 385 |
| <b>T Premium</b> through-the-wall INDOOR INSTALLATION (metal powder coated cover, wall ducts, removable grills, metal ducts galvanized, insulated)       | 725 |
| <b>E</b> through-the-wall OUTDOOR INSTALLATION (40mm TTW external aluminum and rubber insulation, winter module, condensate tray defrost, -15°C)         | 885 |

### 2. Control:

|  |     |
|--|-----|
| <b>S</b> standard: built-in mechanical humidistat  | 0   |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat | 345 |
| <b>W6</b> remote wired humidistat EBERLE HYG6001+ built-in mechanical humidistat               | 119 |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat   | 129 |

### 3. Air temperature:

|   |    |
|---|----|
| <b>S</b> standard: +22°C...+42°C                    | 0  |
| <b>T</b> +15°C...+42°C (with antifreeze thermostat) | 57 |

### 4. Air heating:

|   |     |
|---|-----|
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)  | 0   |
| <b>H</b> LPHW, 3.5 kW, without regulation, contact for external thermostat 230V/5A  | 228 |
| <b>V</b> LPHW, 3.5 kW, with solenoid valve (in standard version – external contact 230V/5A) (with EASY 300 – fully automatic regulation + no current contact) | 442 |
| <b>E</b> Electrical heating 2 kW  | 486 |

### 5. LPHW connection:

|                                       |   |
|---------------------------------------|---|
| <b>S</b> standard: N/A (without LPHW) | 0 |
| <b>B</b> from the back                | 0 |
| <b>R</b> from right                   | 0 |
| <b>L</b> from left                    | 0 |

### 6. micro LIGHT+


|  |     |
|--|-----|
| <b>S</b> standard: without Pool Security microLIGHT+ | 0   |
| <b>L</b> Pool Security microLIGHT+                   | 147 |

### 7. Air filter:

|  |    |
|--|----|
| <b>S</b> standard: without air filter  | 0  |
| <b>F</b> Air filter (for model with wall or mobile stand installation: 1-S/M option) | 52 |
| <b>C</b> Air filter grid (for model with TTW installation: 1-P/E option)             | 52 |

### 8. Fresh air supply:

|  |    |
|--|----|
| <b>S</b> standard: without fresh air supply          | 0  |
| <b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized | 35 |

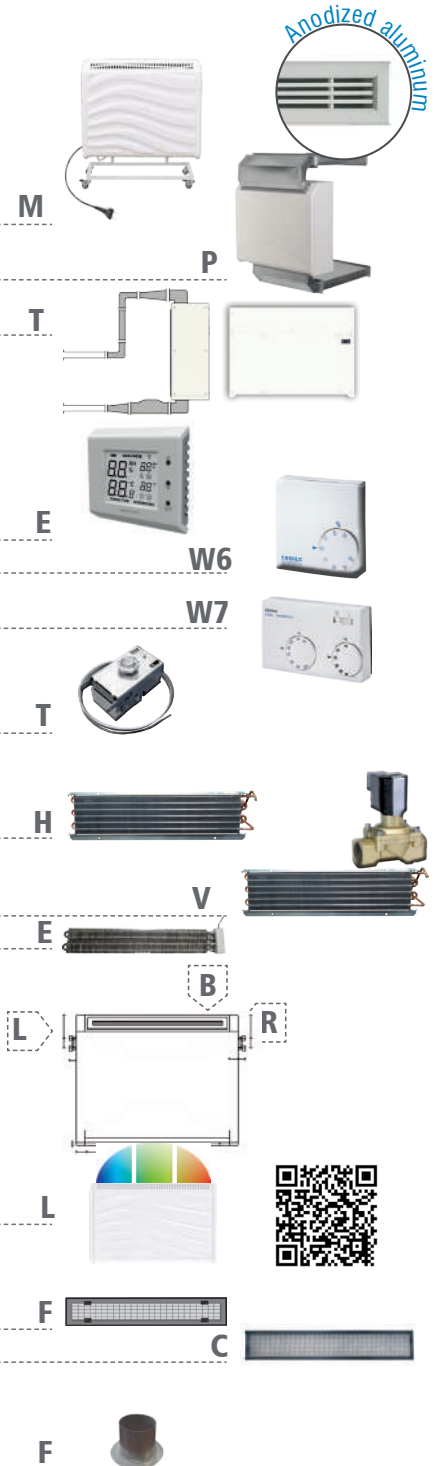

EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

48 l  
45 m<sup>2</sup>

## DRY 400 METAL | DRY 400 SILVER

| Cover         | Cover           | Extraction rate                | Air flow                 |
|---------------|-----------------|--------------------------------|--------------------------|
| DRY 400 METAL | DRY 400 SILVER  | (30°C/60% RH<br>- 30°C/80% RH) |                          |
| metal         | stainless steel | 45-78 l/24hrs                  | 600 m <sup>3</sup> /hour |



DRY 400M



DRY 400S


642 mm  
780 mm  
300 mm



DRY 400M - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.

DRY 400S - - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.

| Basic equipment:   | Model:                | Price EXW<br>w/o VAT /EUR/ |
|--|-----------------------|----------------------------|
| Dehumidifier, wall console, user's manual<br>installation layout, fixation screws  | <b>DRY 400 METAL</b>  | <b>3 090</b>               |
| <b>micro COMPRESSOR+</b> <b>ultra QUIET+</b> <b>easy INSTALL+</b> <b>FREE 3 YEARS WARRANTY</b>   | <b>DRY 400 SILVER</b> | <b>3 450</b>               |
| <b>1. Color options:</b>   |                       |                            |
| <b>S</b> standard: silver color 'Tiger'  |                       | 0                          |
| <b>W</b> white (RAL9010) glossy  |                       | 0                          |
| <b>C</b> color selection according to your preference (RAL code)   |                       | price on demand            |
| <b>2. Installation:</b>  |                       |                            |
| <b>S</b> standard: on the wall   |                       | 0                          |
| <b>M</b> mobile stand, 4 wheels, color: silver 'Tiger', white (RAL 9010), 230V EURO plug, 2m   |                       | 218                        |
| <b>3. Control:</b>   |                       |                            |
| <b>S</b> standard: built-in digital humidistat & thermostat<br>+ built-in mechanical humidistat  |                       | 0                          |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300<br>+ built-in mechanical humidistat (without built-in digital humidistat & thermostat) |                       | 345                        |
| <b>W6</b> remote wired humidistat EBERLE HYG6001<br>+ built-in mechanical humidistat (without built-in digital humidistat & thermostat)              |                       | 79                         |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001 + built-in<br>mechanical humidistat (without built-in digital humidistat & thermostat) |                       | 88                         |
| <b>4. Air temperature:</b>   |                       |                            |
| <b>S</b> standard: +22°C...+42°C   |                       | 0                          |
| <b>T</b> +15°C...+42°C (with antifreeze thermostat)  |                       | 57                         |
| <b>5. Air heating:</b>   |                       |                            |
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)   |                       | 0                          |
| <b>H</b> LPHW, 3.5 kW, without regulation (external no current contact)  |                       | 228                        |
| <b>V</b> LPHW, 3.5 kW, fully automatic regulation<br>(with solenoid valve + external no current contact)   |                       | 442                        |
| <b>E</b> Electrical heating 2 kW   |                       | 486                        |
| <b>6. LPHW connection:</b>   |                       |                            |
| <b>S</b> standard: N/A (without LPHW)  |                       | 0                          |
| <b>B</b> from the back   |                       | 0                          |
| <b>R</b> from right  |                       | 0                          |
| <b>L</b> from left   |                       | 0                          |
| <b>7. micro LIGHT+</b>   |                       |                            |
| <b>S</b> standard: without Pool Security microLIGHT+   |                       | 0                          |
| <b>L</b> Pool Security microLIGHT+   |                       | 147                        |
| <b>8. Air filter:</b>  |                       |                            |
| <b>S</b> standard: without air filter  |                       | 0                          |
| <b>F</b> Air filter  |                       | 52                         |
| <b>9. Fresh air supply:</b>  |                       |                            |
| <b>S</b> standard: without fresh air supply  |                       | 0                          |
| <b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized   |                       | 35                         |

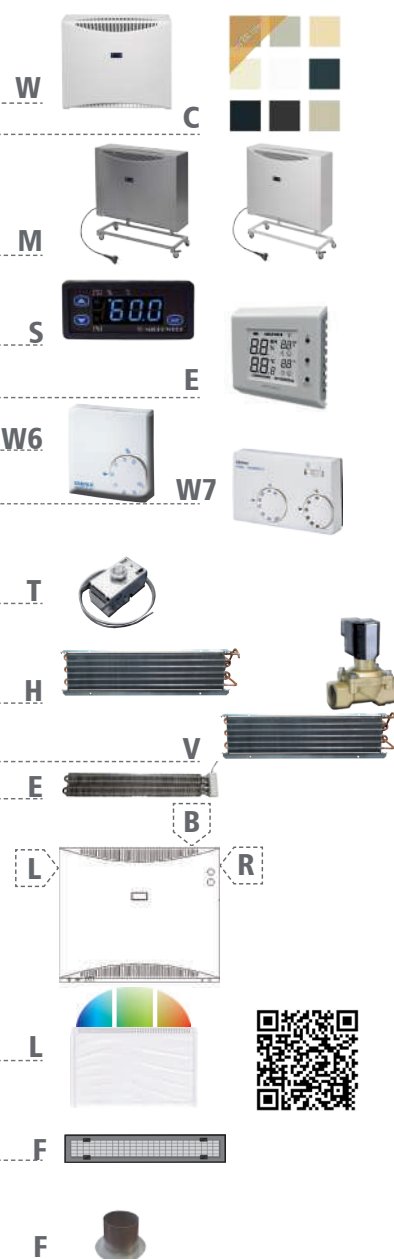

EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



66 l  
60 m<sup>2</sup>

## DRY 500 WAVE

| Cover           | Extraction rate<br>(30°C/60% RH<br>- 35°C/95% RH) | Air flow                 |
|-----------------|---|--------------------------|
| plastic (acryl) | 66-132 l/24hrs                                    | 800 m <sup>3</sup> /hour |



### DRY 500W - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8.

#### Basic equipment:

Price EXW  
w/o VAT /EUR/

Dehumidifier, wall console, user's manual, installation layout, fixation screws

micro COMPRESSOR+ ultra QUIET+ easy INSTALL+



3 290

#### 1. Installation:

|  |     |
|--|-----|
| <b>S</b> standard: on the wall   | 0   |
| <b>M</b> mobile stand, 4 wheels, white color (RAL 9010), 230V EURO plug, 2m  | 245 |
| <b>P</b> through-the-wall INDOOR INSTALLATION (fiberglass cover with through-the-wall ducts set and removable grills, metal ducts galvanized, insulated) | 395 |
| <b>T Premium</b> through-the-wall INDOOR INSTALLATION (metal powder coated cover, wall ducts, removable grills, metal ducts galvanized, insulated)       | 765 |
| <b>E</b> through-the-wall OUTDOOR INSTALLATION (40mm TTW external aluminum and rubber insulation, winter module, condensate tray defrost, -15°C)         | 895 |

#### 2. Control:

|  |     |
|--|-----|
| <b>S</b> standard: built-in mechanical humidistat  | 0   |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat | 345 |
| <b>W6</b> remote wired humidistat EBERLE HYG6001+built-in mechanical humidistat                | 119 |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat   | 129 |

#### 3. Air temperature:

|  |     |
|--|-----|
| <b>S</b> standard: +22°C...+35°C                           | 0   |
| <b>T</b> +15°C...+35°C (with antifreeze thermostat)        | 57  |
| <b>V</b> +22°C...+42°C (with thermostatic expansion valve) | 259 |
| <b>A</b> +15°C...+42°C (T+V)                               | 279 |
| <b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)   | 385 |

#### 4. Air heating:

|   |     |
|---|-----|
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)  | 0   |
| <b>H</b> LPHW, 5 kW, without regulation, contact for external thermostat 230V/5A  | 246 |
| <b>V</b> LPHW, 5 kW, with solenoid valve (in standard version – external contact 230V/5A) (with EASY 300 – fully automatic regulation + no current contact) | 458 |
| <b>E</b> Electrical heating 2 kW  | 507 |

#### 5. LPHW connection:

|                                       |   |
|---------------------------------------|---|
| <b>S</b> standard: N/A (without LPHW) | 0 |
| <b>B</b> from the back                | 0 |
| <b>R</b> from right                   | 0 |
| <b>L</b> from left                    | 0 |

#### 6. micro LIGHT+


|  |     |
|--|-----|
| <b>S</b> standard: without Pool Security microLIGHT+ | 0   |
| <b>L</b> Pool Security microLIGHT+                   | 147 |

#### 7. Air filter:

|  |    |
|--|----|
| <b>S</b> standard: without air filter  | 0  |
| <b>F</b> Air filter (for model with wall or mobile stand installation: 1-S/M option) | 54 |
| <b>C</b> Air filter grid (for model with TTW installation: 1-P/E option)             | 67 |

#### 8. Fresh air supply:

|  |    |
|--|----|
| <b>S</b> standard: without fresh air supply          | 0  |
| <b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized | 35 |

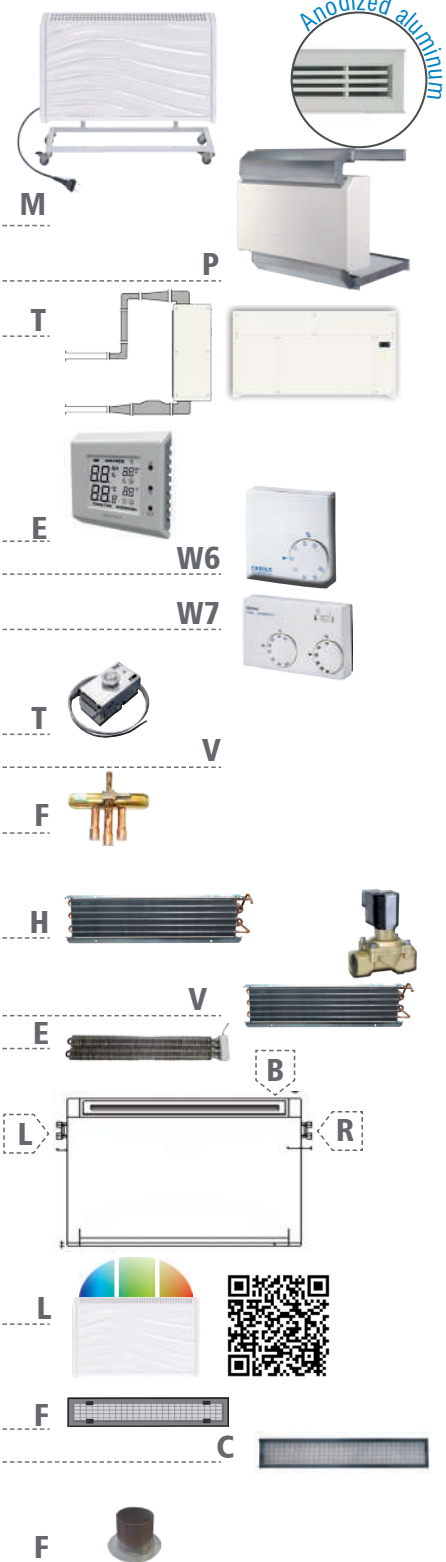

EURO PALETTE packed, FUMIGATED


6€/1pc (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



66 l  
60 m<sup>2</sup>

## DRY 500 METAL | DRY 500 SILVER

| Cover         | Cover           | Extraction rate                | Air flow                 |
|---------------|-----------------|--------------------------------|--------------------------|
| DRY 500 METAL | DRY 500 SILVER  | (30°C/60% RH<br>- 35°C/95% RH) |                          |
| metal         | stainless steel | 66-132 l/24hrs                 | 800 m <sup>3</sup> /hour |

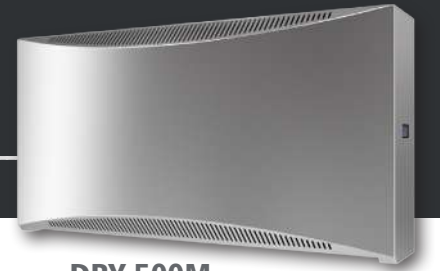

DRY 500M



DRY 500S

SWIMMING POOL DEHUMIDIFIERS


DRY 500M - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.

DRY 500S - - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.



| Basic equipment:  | Model:         | Price EXW<br>w/o VAT /EUR/ |
|---|----------------|----------------------------|
| Dehumidifier, wall console, user's manual, installation layout, fixation screws                   | DRY 500 METAL  | 3 880                      |
| <b>micro COMPRESSOR</b> + <b>ultra QUIET</b> + <b>easy INSTALL</b> + <b>FREE 3 YEARS WARRANTY</b> | DRY 500 SILVER | 4 590                      |

| 1. Color options:   |  |                 |
|---|--|-----------------|
| <b>S</b> standard: silver color, 'Tiger'  |  | 0               |
| <b>W</b> white (RAL9010) glossy   |  | 0               |
| <b>C</b> Color selection according to your preference (RAL code)  |  | price on demand |
| 2. Installation:  |  |                 |
| <b>S</b> standard: on the wall  |  | 0               |
| <b>M</b> mobile stand, 4 wheels, color: silver 'Tiger', white (RAL 9010), 230V EURO plug, 2m  |  | 245             |
| 3. Control:   |  |                 |
| <b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat  |  | 0               |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) |  | 345             |
| <b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)              |  | 79              |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) |  | 88              |
| 4. Air temperature:   |  |                 |
| <b>S</b> standard: +22°C...+35°C  |  | 0               |
| <b>T</b> +15°C...+35°C (with antifreeze thermostat)   |  | 57              |
| <b>V</b> +22°C...+42°C (with thermostatic expansion valve)  |  | 259             |
| <b>A</b> +15°C...+42°C (T+V)  |  | 279             |
| <b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)  |  | 385             |
| 5. Air heating:   |  |                 |
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)  |  | 0               |
| <b>H</b> LPHW, 5 kW, without regulation (external no current contact)   |  | 246             |
| <b>V</b> LPHW, 5 kW, fully automatic regulation (with solenoid valve + external no current contact)   |  | 458             |
| <b>E</b> Electrical heating 2 kW  |  | 507             |
| 6. LPHW connection:   |  |                 |
| <b>S</b> standard: N/A (without LPHW)   |  | 0               |
| <b>B</b> from the back  |  | 0               |
| <b>R</b> from right   |  | 0               |
| <b>L</b> from left  |  | 0               |
| 7. <b>micro LIGHT</b> +   |  |                 |
| <b>S</b> standard: without Pool Security microLIGHT+  |  | 0               |
| <b>L</b> Pool Security microLIGHT+  |  | 147             |
| 8. Air filter:  |  |                 |
| <b>S</b> standard: without air filter   |  | 0               |
| <b>F</b> Air filter   |  | 54              |
| 9. Fresh air supply:  |  |                 |
| <b>S</b> standard: without fresh air supply   |  | 0               |
| <b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized  |  | 35              |

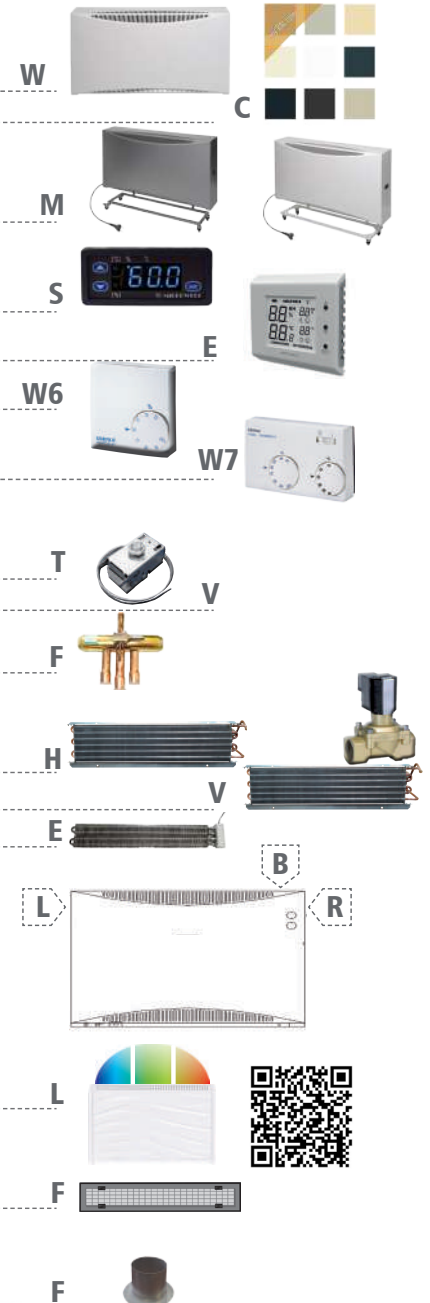

v. 02/2021

**MICROWELL**

EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

90L  
90 m<sup>2</sup>

**DRY 800 METAL**

| Cover | Extraction rate<br>(30°C/60% RH<br>- 35°C/95% RH) | Air flow                  |
|-------|---|---------------------------|
| metal | 90-180 l/24hrs                                    | 1100 m <sup>3</sup> /hour |



120L  
120 m<sup>2</sup>

**DRY 1200 METAL**

| Extraction rate<br>(30°C/60% RH<br>- 35°C/95% RH) | Air flow                  |
|---|---------------------------|
| 120-240 l/24hrs                                   | 1200 m <sup>3</sup> /hour |

**DRY 800M** - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.

**DRY 1200M** - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.

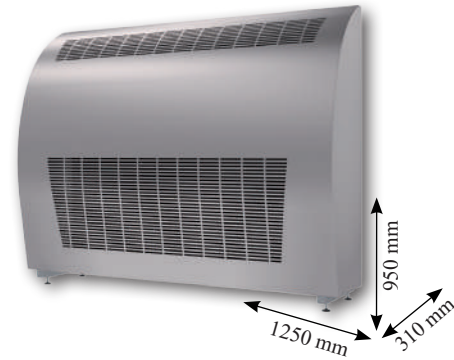

**Basic equipment:**

**Model:**

**Price EXW**  
w/o VAT /EUR/

Dehumidifier, floor feet, user's manual

**DRY 800 METAL**

**4 690**

micro COMPRESSOR + ultra QUIET + easy INSTALL +



**DRY 1200 METAL**

**5 290**

**1. Color options:**

|  |                 |
|--|-----------------|
| <b>S</b> standard: silver color „Tiger“                          | 0               |
| <b>W</b> white (RAL9010) glossy                                  | 0               |
| <b>C</b> color selection according to your preference (RAL code) | price on demand |

**2. Installation:**

|  |     |
|--|-----|
| <b>S</b> standard: on the floor  | 0   |
| <b>M</b> on the wall (floor feet + wall console)   | 135 |
| <b>P</b> through-the-wall INDOOR INSTALLATION (main chassis cover from galvanized metal powder coated RAL9010 with AIR IN from the back, AIR OUT to the back/to the top, including the through-the-wall ducts set and removable grills, insulated from the inside) | 317 |
| <b>E</b> through-the-wall OUTDOOR INSTALLATION (40mm TTW external aluminum and rubber insulation, winter module, condensate tray defrost, -15°C)   | 895 |

**3. Control:**

|   |     |
|---|-----|
| <b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat  | 0   |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) | 345 |
| <b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)              | 79  |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) | 88  |

**4. Air temperature:**

|  |     |
|--|-----|
| <b>S</b> standard: +22°C...+35°C                                     | 0   |
| <b>T</b> +15°C...+35°C (with antifreeze thermostat)                  | 57  |
| <b>B</b> +35°C...+42°C (with solenoid bypass and compressor cooling) | 270 |

**5. Air heating:**

|   |     |
|---|-----|
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)  | 0   |
| <b>H</b> LPHW, 7 kW, without regulation (external no current contact)                               | 313 |
| <b>V</b> LPHW, 7 kW, fully automatic regulation (with solenoid valve + external no current contact) | 524 |
| <b>E</b> Electrical heating 2.5 kW  | 564 |

**6. LPHW connection:**

|                                       |   |
|---------------------------------------|---|
| <b>S</b> standard: N/A (without LPHW) | 0 |
| <b>B</b> from the back                | 0 |
| <b>R</b> from right                   | 0 |

**7. micro LIGHT+**

|  |     |
|--|-----|
| <b>S</b> standard: without Pool Security microLIGHT+ | 0   |
| <b>L</b> Pool Security microLIGHT+                   | 147 |

**8. Air filter:**

|  |    |
|--|----|
| <b>S</b> standard: without air filter  | 0  |
| <b>F</b> Air filter (for model with wall or mobile stand installation: 1-S/M option) | 54 |
| <b>C</b> Air filter grid (for model with TTW installation: 1-P/E option)             | 67 |

**9. Fresh air supply:**

|  |    |
|--|----|
| <b>S</b> standard: without fresh air supply          | 0  |
| <b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized | 35 |



EURO PALETTE packed, FUMIGATED

**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

32 l  
30 m<sup>2</sup>

# DRY 300 DUCT

| Cover | Extraction rate<br>(30°C/60% RH<br>~ 35°C/95% RH) | Air flow                         |
|-------|---|----------------------------------|
| metal | 32-63 l/24hrs                                     | 500 m <sup>3</sup> /hour, 200 Pa |



## DRY 300D - 1. - 2. - 3. - 4. - 5. - 6.

**Basic equipment:** Price EXW w/o VAT /EUR/

Dehumidifier, wall console, fixation screws, user's manual, installation layout; **AIR IN** from the bottom, **AIR OUT** to the top

**2 850**

micro COMPRESSOR+ micro CONTROL+ 

### 1. Control:

|   |     |
|---|-----|
| <b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat  | 0   |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) | 345 |
| <b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)              | 79  |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat (without built-in digital humidistat & thermostat)   | 88  |

### 2. Air temperature:

|  |     |
|--|-----|
| <b>S</b> standard: +22°C...+35°C                           | 0   |
| <b>T</b> +15°C...+35°C (with antifreeze thermostat)        | 57  |
| <b>V</b> +22°C...+42°C (with thermostatic expansion valve) | 259 |
| <b>A</b> +15°C...+42°C (T+V)                               | 279 |
| <b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)   | 385 |

### 3. Air heating:

|   |     |
|---|-----|
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)  | 0   |
| <b>H</b> LPHW, 3.5 kW, without regulation (external no current contact)                               | 246 |
| <b>V</b> LPHW, 3.5 kW, fully automatic regulation (with solenoid valve + external no current contact) | 458 |
| <b>E</b> Electrical heating, 2 kW   | 486 |

### 4. LPHW connection:


|                                       |   |
|---------------------------------------|---|
| <b>S</b> standard: N/A (without LPHW) | 0 |
| <b>B</b> from the back                | 0 |
| <b>R</b> from right                   | 0 |


### 5. Air filter console:

|  |     |
|--|-----|
| <b>S</b> standard: without air filter console            | 0   |
| <b>C</b> Air filter console 5C, with removable cartouche | 147 |

### 6. Air ducting connection:

|  |    |
|--|----|
| <b>S</b> standard: 300x100 from bottom and top | 0  |
| <b>F</b> front: 300x100 Air IN, 400x80 Air OUT | 80 |
| <b>C</b> combination of above                  | 80 |

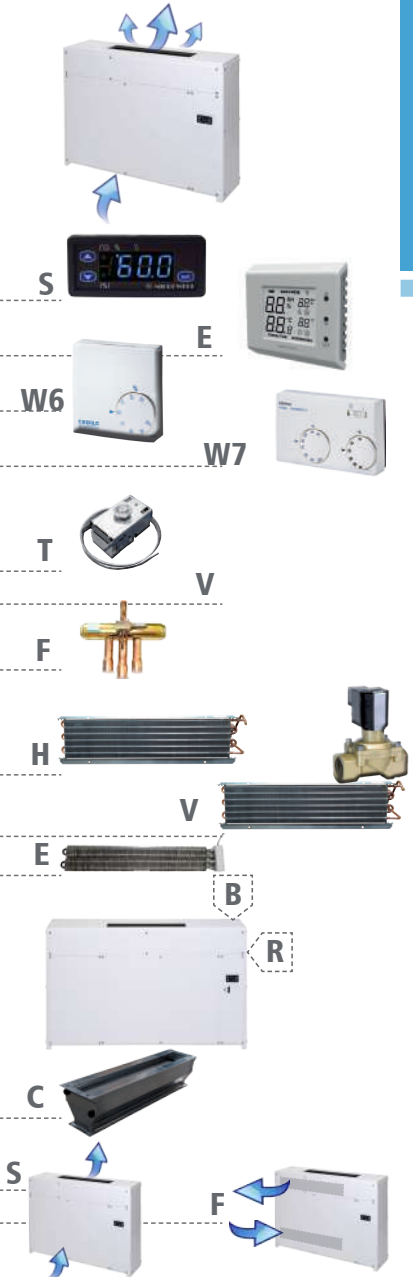

 EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

## Various range of ACCESSORIES - more on pages 51-55

- Air ducting and grills
- Floor grills
- Equipment for installation and services
- **micro LIGHT**



43 l  
40 m<sup>2</sup>

## DRY 400 DUCT

| Cover | Extraction rate<br>(30°C/60% RH<br>~ 35°C/95% RH) | Air flow                         |
|-------|---|----------------------------------|
| metal | 43-78 l/24hrs                                     | 500 m <sup>3</sup> /hour, 200 Pa |



### DRY 400D - 1. - 2. - 3. - 4. - 5. - 6.


**Basic equipment:** Price EXW w/o VAT /EUR/

Dehumidifier, wall console, fixation screws, user's manual, installation layout; **AIR IN** from the bottom, **AIR OUT** to the top

**3 090**

micro COMPRESSOR+ micro CONTROL+

| 1. Control:   |     |
|---|-----|
| <b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat  | 0   |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) | 345 |
| <b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)              | 79  |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat (without built-in digital humidistat & thermostat)   | 88  |
| 2. Air temperature:   |     |
| <b>S</b> standard: +22°C...+42°C  | 0   |
| <b>T</b> +15°C...+42°C (with antifreeze thermostat)   | 57  |
| 3. Air heating:   |     |
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)  | 0   |
| <b>H</b> LPHW, 3.5 kW, without regulation (external no current contact)   | 246 |
| <b>V</b> LPHW, 3.5 kW, fully automatic regulation (with solenoid valve + external no current contact)   | 458 |
| <b>E</b> Electrical heating, 2 kW   | 486 |
| 4. LPHW connection:   |     |
| <b>S</b> standard: N/A (without LPHW)   | 0   |
| <b>B</b> from the back  | 0   |
| <b>R</b> from right   | 0   |
| 5. Air filter console:  |     |
| <b>S</b> standard: without air filter console   | 0   |
| <b>C</b> Air filter console 5C, with removable cartouche  | 147 |
| 6. Air ducting connection:  |     |
| <b>S</b> standard: 300x100 from bottom and top  | 0   |
| <b>F</b> front: 300x100 Air IN, 400x80 Air OUT  | 80  |
| <b>C</b> combination of above   | 80  |

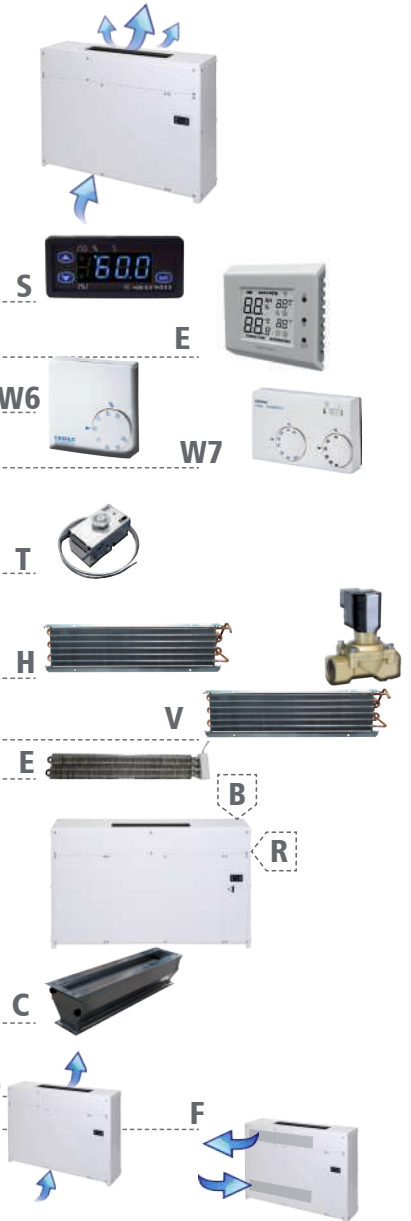

EURO PALETTE packed, FUMIGATED  
6€/1pc (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

### Various range of ACCESSORIES - more on pages 51-55


- Air ducting and grills
- Floor grills
- Equipment for installation and services
- 



52 l  
50 m<sup>2</sup>

## DRY 500 DUCT

| Cover | Extraction rate<br>(30°C/60% RH<br>~ 35°C/95% RH) | Air flow                          |
|-------|---|-----------------------------------|
| metal | 52-132 l/24hrs                                    | 1000 m <sup>3</sup> /hour, 200 Pa |

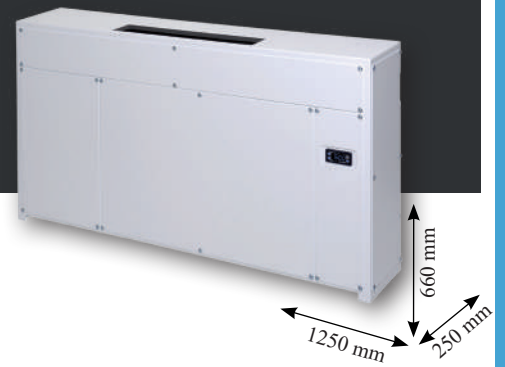

### DRY 500D - 1. - 2. - 3. - 4. - 5. - 6.

**Basic equipment:** Price EXW w/o VAT /EUR/

Dehumidifier, wall console, fixation screws, user's manual, installation layout; **AIR IN** from the bottom, **AIR OUT** to the top

**3 860**

micro COMPRESSOR+ micro CONTROL+



#### 1. Control:

|   |     |
|---|-----|
| <b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat  | 0   |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) | 345 |
| <b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)              | 79  |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat (without built-in digital humidistat & thermostat)   | 88  |

#### 2. Air temperature:

|  |     |
|--|-----|
| <b>S</b> standard: +22°C...+35°C                           | 0   |
| <b>T</b> +15°C...+35°C (with antifreeze thermostat)        | 57  |
| <b>V</b> +22°C...+42°C (with thermostatic expansion valve) | 259 |
| <b>A</b> +15°C...+42°C (T+V)                               | 279 |
| <b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)   | 385 |

#### 3. Air heating:

|   |     |
|---|-----|
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)  | 0   |
| <b>H</b> LPHW, 5 kW, without regulation (external no current contact)                               | 246 |
| <b>V</b> LPHW, 5 kW, fully automatic regulation (with solenoid valve + external no current contact) | 458 |
| <b>E</b> Electrical heating, 2 kW   | 486 |

#### 4. LPHW connection:


|                                       |   |
|---------------------------------------|---|
| <b>S</b> standard: N/A (without LPHW) | 0 |
| <b>B</b> from the back                | 0 |
| <b>R</b> from right                   | 0 |

#### 5. Air filter console:

|  |     |
|--|-----|
| <b>S</b> standard: without air filter console            | 0   |
| <b>C</b> Air filter console 5C, with removable cartouche | 166 |

#### 6. Air ducting connection:

|  |    |
|--|----|
| <b>S</b> standard: 300x100 from bottom and top | 0  |
| <b>F</b> front: 300x100 Air IN, 400x80 Air OUT | 80 |
| <b>C</b> combination of above                  | 80 |

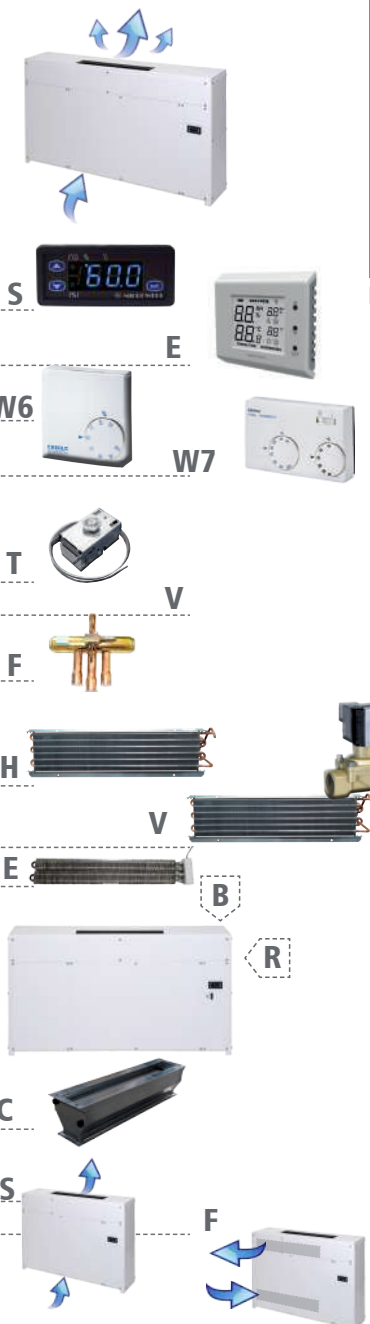

EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

Application



v. 02/2021

MICROWELL

88 l  
80 m<sup>2</sup>

## DRY 800 DUCT

| Cover | Extraction rate<br>(30°C/60% RH<br>- 35°C/95% RH) | Air flow                          |
|-------|---|-----------------------------------|
| metal | 88-180 l/24hrs                                    | 1100 m <sup>3</sup> /hour, 170 Pa |



### DRY 800D - 1. - 2. - 3. - 4. - 5. - 6. 6.

#### Basic equipment:

Dehumidifier, wall console, fixation screws, user's manual, installation layout

micro COMPRESSOR+ micro CONTROL+



Price EXW  
w/o VAT /EUR/

5 080

#### 1. Control:

|   |     |
|---|-----|
| <b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat  | 0   |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) | 345 |
| <b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)              | 79  |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) | 88  |




#### 2. Air temperature:

|  |     |
|--|-----|
| <b>S</b> standard: +22°C...+35°C                                     | 0   |
| <b>T</b> +15°C...+35°C (with antifreeze thermostat)                  | 57  |
| <b>B</b> +35°C...+42°C (with solenoid bypass and compressor cooling) | 270 |



#### 3. Air heating:

|   |     |
|---|-----|
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)  | 0   |
| <b>H</b> LPHW, 7 kW, without regulation (external no current contact)                               | 313 |
| <b>V</b> LPHW, 7 kW, fully automatic regulation (with solenoid valve + external no current contact) | 524 |
| <b>E</b> Electrical heating 2.5 kW  | 564 |

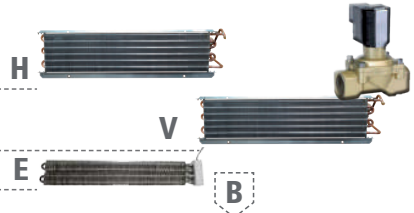

#### 4. LPHW connection:

|                                       |   |
|---------------------------------------|---|
| <b>S</b> standard: N/A (without LPHW) | 0 |
| <b>B</b> from the back                | 0 |
| <b>R</b> from right                   | 0 |




#### 5. Air filter console:

|  |     |
|--|-----|
| <b>S</b> standard: without air filter console            | 0   |
| <b>C</b> Air filter console 5C, with removable cartouche | 228 |



#### 6. Air ducting connection:

|                         |    |
|-------------------------|----|
| <b>AIR IN:</b>          |    |
| <b>A</b> from behind    | 0  |
| <b>B</b> from the front | 50 |
| <b>AIR OUT:</b>         |    |
| <b>A</b> from behind    | 0  |
| <b>B</b> from the front | 50 |
| <b>C</b> from the top   | 0  |

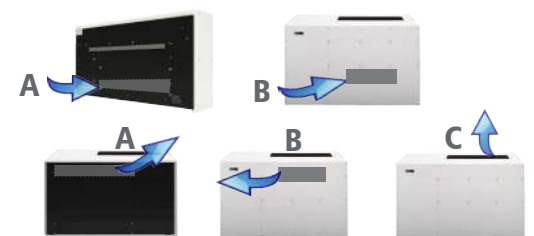

EURO PALETTE packed, FUMIGATED

6€/1pc (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



### Various range of ACCESSORIES - more on pages 51-55

- Air ducting and grills
- Floor grills
- Equipment for installation and services
- micro LIGHT

112 l  
110 m<sup>2</sup>

## DRY 1200 DUCT

| Cover | Extraction rate<br>(30°C/60% RH<br>~ 35°C/95% RH) | Air flow                          |
|-------|---|-----------------------------------|
| metal | 112-240 l/24hrs                                   | 1200 m <sup>3</sup> /hour, 145 Pa |



### DRY 1200D - 1. - 2. - 3. - 4. - 5. - 6.

**Basic equipment:** Price EXW w/o VAT /EUR/

Dehumidifier, wall console, fixation screws, user's manual, installation layout

micro COMPRESSOR + micro CONTROL +



**5 980**

#### 1. Control:

|   |     |
|---|-----|
| <b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat  | 0   |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) | 345 |
| <b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)              | 79  |
| <b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) | 88  |




#### 2. Air temperature:

|  |     |
|--|-----|
| <b>S</b> standard: +22°C...+35°C                                     | 0   |
| <b>T</b> +15°C...+35°C (with antifreeze thermostat)                  | 57  |
| <b>B</b> +35°C...+42°C (with solenoid bypass and compressor cooling) | 270 |



#### 3. Air heating:

|   |     |
|---|-----|
| <b>S</b> standard: without LPHW (Low Pressure Hot Water)  | 0   |
| <b>H</b> LPHW, 7 kW, without regulation (external no current contact)                               | 313 |
| <b>V</b> LPHW, 7 kW, fully automatic regulation (with solenoid valve + external no current contact) | 524 |
| <b>E</b> Electrical heating 2.5 kW  | 564 |

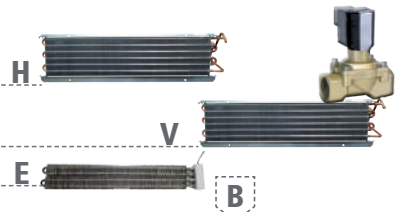

#### 4. LPHW connection:

|                                       |   |
|---------------------------------------|---|
| <b>S</b> standard: N/A (without LPHW) | 0 |
| <b>B</b> from the back                | 0 |
| <b>R</b> from right                   | 0 |




#### 5. Air filter console:

|  |     |
|--|-----|
| <b>S</b> standard: without air filter console            | 0   |
| <b>C</b> Air filter console 5C, with removable cartouche | 228 |



#### 6. Air ducting connection:

| AIR IN:                 |    |
|-------------------------|----|
| <b>A</b> from behind    | 0  |
| <b>B</b> from the front | 50 |
| AIR OUT:                |    |
| <b>A</b> from behind    | 0  |
| <b>B</b> from the front | 50 |
| <b>C</b> from the top   | 0  |

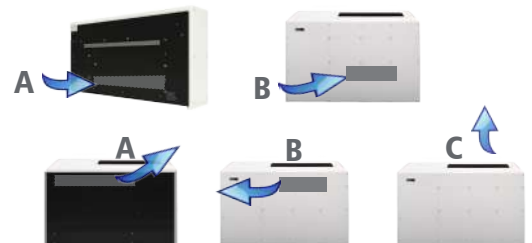

Application



EURO PALLETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



v. 02/2021

**MICROWELL**

**WORLD INNOVATION**

|   |   |                           |   |                           |
|---|---|---------------------------|---|---------------------------|
| <b>67 l / 60 m<sup>2</sup> DRY SIREN Smart mono</b> |   |                           | <b>134 l / 120 m<sup>2</sup> DRY SIREN Smart due</b>  |                           |
| <b>Cover</b>  | <b>Extraction rate</b><br>(30°C/60% RH ~ 35°C/95% RH) | <b>Air flow</b>           | <b>Extraction rate</b><br>(30°C/60% RH ~ 35°C/95% RH) | <b>Air flow</b>           |
| plastic (acryl) white color                         | 67-130 l/24hrs  | 1000 m <sup>3</sup> /hour | 134-260 l/24hrs                                       | 2000 m <sup>3</sup> /hour |

-   
Ceiling pool dehumidifier
-   
Microclimate protection
-   
LED lamp
-   
Loudspeaker
-   
Supervision



**DRY SIREN Smart M** - 1. - 2. - 3. - 4. - 5.

**DRY SIREN Smart D** - 1. - 2. - 3. - 4. - 5.

| Basic equipment:   | Model:                      | Price EXW w/o VAT /EUR/ |
|--|-----------------------------|-------------------------|
| ceiling unit, compressor unit, wall consoles for compressor unit, ceiling lifting mechanism, Bluetooth speaker, LED light, hot gas defrost, user's manual    | <b>DRY SIREN Smart mono</b> | <b>7 070</b>            |
| 2x ceiling unit, compressor unit, wall consoles for compressor unit, ceiling lifting mechanism, Bluetooth speaker, LED light, hot gas defrost, user's manual | <b>DRY SIREN Smart due</b>  | <b>12 850</b>           |



- micro LIGHT+
- micro ENERGY+
- micro SAFETY+
- micro COMPRESSOR+
- ultra QUIET+
- 

|  |  |        |
|--|--|--------|
| <b>1. Ceiling unit installation:</b>   |  |        |
| <b>S</b> concrete ceiling  |  | 0      |
| <b>B</b> wooden beam   |  | 0      |
| <b>2. Cable length:</b>  |  |        |
| <b>S</b> 10m   |  | 0      |
| <b>M</b> 20m   |  | 46     |
| <b>L</b> 30m   |  | 67     |
| <b>3. Copper pipes:</b>  |  |        |
| <b>S</b> standard: without copper pipes  |  | 0      |
| <b>A</b> Insulated copper pipes D10 (3/8" x 1)+D12 (1/2" x 1) - 50m package /Rebate not applicable. This is the final purchase price./ |  | 337.50 |
| <b>4. Additional pump:</b>   |  |        |
| <b>S</b> standard: Condensate pump, vertical discharge 20cm  |  | 0      |
| <b>A</b> Pump SI 82 – condensing, with tank 2l, 500l/h, max. 5m /Rebate not applicable. This is the final purchase price./             |  | 75     |
| <b>5. Condensate hose:</b>   |  |        |
| <b>S</b> standard: with 1m condensate hose   |  | 0      |
| <b>A</b> Condensate hose with metal spiral 18/12mm – 1 standard meter  |  | 4.50   |



**EURO PALETTE** packed, FUMIGATED  
(Depending on the model it is possible to pack more units on EUP (2-6pcs).)  
**6€/1pc**





# Ceiling dehumidifier

## DRY SIREN



MICROWELL

LEADING EUROPEAN SWIMMING POOL  
HEAT PUMP MANUFACTURER



## Breathtaking dehumidifier with extra features

MICROWELL DRY SIREN is the ultimate superstar, the first ceiling swimming pool dehumidifier in the world. Combining all what Microwell technology has to offer, DRY SIREN is an intelligent and visually captivating solution of paramount performance, setting a new tide in the industry.

### 5 products in 1

Ideal humidity

Low humidity

High humidity

DEHUMIDIFIER

microLIGHT+

LOUDSPEAKER

ONLINE SUPERVISION 24/7

LED LAMP

22 l  
90 m<sup>3</sup>/\*

## DRY 300 GALLERY

38 l  
135 m<sup>3</sup>/\*

## DRY 400 GALLERY

| Cover                        | Extraction rate (25°C, 50%RH) | Air flow              | Extraction rate (25°C, 50%RH) | Air flow              |
|------------------------------|-------------------------------|-----------------------|-------------------------------|-----------------------|
| wooden wardrobe construction | 22 l/24hrs                    | 550 m <sup>3</sup> /h | 38 l/hrs                      | 600 m <sup>3</sup> /h |




**DRY 300G** - 1. - 2. - 3.



**DRY 400G** - 1. - 2. - 3.

| Basic equipment:  | Model:                 | Price EXW w/o VAT /EUR/ |
|---|------------------------|-------------------------|
| Fully mobile dehumidifier, 20 liter condensation tank, mobile cart, water tank drainage, float switch, user's manual<br><br>micro COMPRESSOR+ | <b>DRY 300 GALLERY</b> | <b>2 890</b>            |
|   | <b>DRY 400 GALLERY</b> | <b>3 230</b>            |

| 1. Control:   |  |     |
|---|--|-----|
| <b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat  |  | 0   |
| <b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat) |  | 345 |
| 2. Air temperature:   |  |     |
| <b>S</b> standard: +15°C...+35°C  |  | 0   |
| <b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)  |  | 246 |
| 3. Air filter:  |  |     |
| <b>S</b> standard: without air filter   |  | 0   |
| <b>F</b> Air filter   |  | 56  |

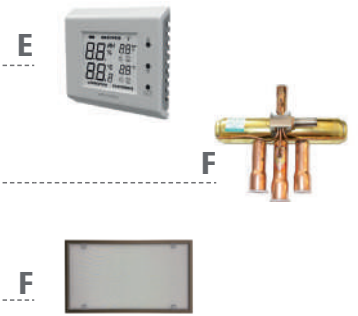

### Basic equipment includes:



 **EURO PALETTE** packed, FUMIGATED  
6€/1pc (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



**Suitable for**  
SMALL  
EXHIBITION  
SPACES

Picture is illustratory.

| 40 l day | T40   TE40      |                      | 90 l day        | T90   TE9            |                 | 120 l day            | T120   TE120 |  |
|----------|-----------------|----------------------|-----------------|----------------------|-----------------|----------------------|--------------|--|
| Cover    | Operating range | Nominal air delivery | Operating range | Nominal air delivery | Operating range | Nominal air delivery |              |  |
| metal    | 0°C - 35°C      | 500 m³/hour          | 0°C - 35°C      | 1100 m³/hour         | 0°C - 35°C      | 1500 m³/hour         |              |  |



ENERGY CONSUMPTION from **650W**




/\* Final prices. Discount does not apply on these items.

| Basic equipment:  | Price EXW /*<br>w/o VAT /EUR/ |
|---|-------------------------------|
| Fully mobile dehumidifier, user's manual, EU plug, on-off<br>Designed for drying up buildings, new construction sites, warehouses, as well as non-heated and flooded buildings with high level of humidity. |                               |
| <b>easy INSTALL+</b>  |                               |
| <b>T40</b>  | <b>1 010</b>                  |
| <b>TE40</b>   | <b>1 130</b>                  |
| with Electrical heater, 2 kW  |                               |
| <b>T90</b>  | <b>1 620</b>                  |
| <b>TE90</b>   | <b>1 780</b>                  |
| with Electrical heater, 2 kW  |                               |
| <b>T120</b>   | <b>1 880</b>                  |
| <b>TE120</b>  | <b>1 970</b>                  |
| with Electrical heater, 2 kW  |                               |


| Additional equipment:                           | Price EXW /*<br>w/o VAT /EUR/ |
|---|-------------------------------|
| <b>A</b> UK plug conversion                     | 19                            |
| <b>B</b> Float switch                           | 75                            |
| <b>C</b> External hygostat                      | 85                            |
| <b>D</b> 20l bucket with mobile base (4 wheels) | 65                            |

/\* Final prices. Discount does not apply on these items.


T40 | TE40

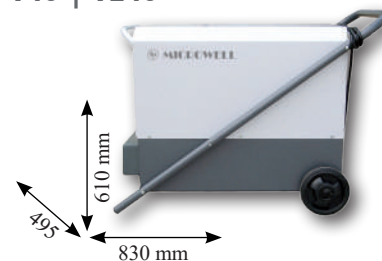

T90 | TE90

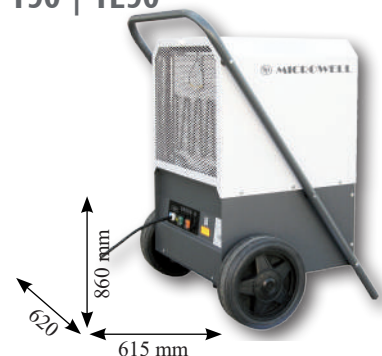

T120 | TE120

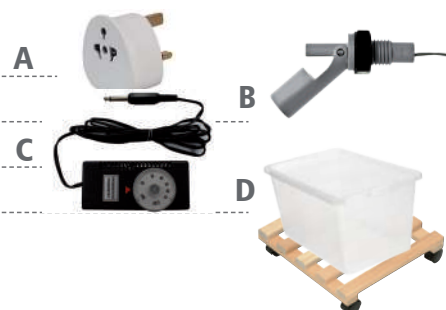

Picture is illustratory.



**Suitable for**  
CONSTRUCTION  
SITES,  
BUILDINGS,  
ROOMS AFTER  
RECONSTRUCTION



EURO PALLETTE packed, FUMIGATED  
**6€/1pc**  
(Depending on the model it is possible to pack more units on EUP (2-6pcs).)



# HEAT PUMPS



For mid-size pools  
/up to 60m<sup>3</sup>/












For bigger pools  
/up to 70m<sup>3</sup>/

For larger pools  
/up to 520m<sup>3</sup>/

For tropical  
air conditions

For jacuzzis




| Series   | Model                             | Pool capacity (cover/ no cover) | Type     | Cooling capacity (A35/W28) | (A27/W27, RH80%) |             |          | Water flow        | Power supply                          | Titanium                                | Acoustic pressure level (1m/10m) | Dimensions netto (W x H x D) condensing unit | Weight netto condensing unit+water unit with box (without box) |
|--|-----------------------------------|---------------------------------|----------|----------------------------|------------------|-------------|----------|-------------------|---------------------------------------|---|----------------------------------|--|--|
|  |                                   |                                 |          |                            | Heat capacity    | Power cons. | COP      |                   |                                       |   |                                  |  |  |
|  |                                   | m <sup>3</sup>                  |          | kW                         | kW               | kW          | COP      | m <sup>3</sup> /h | V AC/ Ph                              | Grade & Surface /*                      | dB(A)                            | mm   | kg   |
|    | <b>HP1000 GREEN</b>               | 45 / 30                         | on/off   | 4.9                        | 9.2              | 1.4         | 6.1      | 4                 | 230/1                                 | Gr 1<br>ASTM265<br>0.42 m <sup>2</sup>  | 46/29                            | 910x620x360                                  | 39   |
|    | <b>HP 1400 GREEN</b>              | 55 / 40                         | on/off   | 6.2                        | 12.3             | 1.8         | 6.0      | 5.3               |                                       | Gr 1<br>ASTM265<br>0.6 m <sup>2</sup>   | 52/32                            | 1000x665x385                                 | 49   |
|    | <b>HP 1700 GREEN</b>              | 70 / 50                         | on/off   | 8.3                        | 16.2             | 2.4         | 6.0      | 7.1               |                                       | Gr 1<br>ASTM265<br>0.6 m <sup>2</sup>   | 54/35                            | 1000x665x385                                 | 56   |
|    | <b>HP 1100 GREEN Inverter Pro</b> | 65 / 30                         | inverter | 4.5                        | 10.8             | 1.7-0.8     | 6.4-14   | 3-5               |                                       | Gr 1<br>ASTM265<br>0.52 m <sup>2</sup>  | 42/29                            | 990x657x340                                  | 49   |
|    | <b>HP 1500 GREEN Inverter Pro</b> | 80 / 40                         | inverter | 6.7                        | 15.0             | 2.3-1.0     | 6.6-15   | 5-7               |                                       | Gr 1<br>ASTM265<br>0.7 m <sup>2</sup>   | 45/24                            | 990x657x340                                  | 52   |
|    | <b>HP 1700 GREEN Inverter Pro</b> | 45-95                           | inverter | 7.5                        | 17.0             | 2.6-1.1     | 6.5-15   | 6-8               |                                       | Gr 1<br>ASTM265<br>0.80 m <sup>2</sup>  | 46/33                            | 954x648x429                                  | 63   |
|    | <b>HP 2100 GREEN Inverter Pro</b> | 105 / 50                        | inverter | 9.5                        | 21.0             | 3.3-1.4     | 6.4-14.8 | 8-10              |                                       | Gr 1<br>ASTM265<br>0.9 m <sup>2</sup>   | 46/33                            | 954x748x429                                  | 68   |
|  | <b>HP 2700 GREEN Inverter Pro</b> | 135 / 60                        | inverter | 11.9                       | 27.5             | 4.2-1.8     | 6.5-15   | 10-12             | Gr 1<br>ASTM265<br>1.0 m <sup>2</sup> | 48/34                                   | 1084x948x429                     | 93   |  |
|  | <b>HP 2300 INVENTOR</b>           | 80 / 60                         | on/off   | 20.1                       | 23               | 3.59        | 6.4      | 8-10              | 400/3                                 | Gr2<br>ASTM B338<br>0.95 m <sup>2</sup> | 56/50/44/38                      | 942x1550x360                                 | 118  |
|  | <b>HP 2400 PREMIUM</b>            |                                 | on/off   | 21.7                       | 24.4             | 3.51        | 6.9      | 8-10              |                                       | Gr2<br>ASTM B338<br>1.2 m <sup>2</sup>  |                                  |  |  |
|  | <b>HP 2800 INVENTOR</b>           | 120 / 80                        | on/off   | 25.0                       | 28.4             | 4.44        | 6.4      | 8-12              | 400/3                                 | Gr2<br>ASTM B338<br>1.2 m <sup>2</sup>  | 56/50/44/38                      | 942x1550x360                                 | 120  |
|  | <b>HP 3000 PREMIUM</b>            |                                 | on/off   | 26.8                       | 30.1             | 4.34        | 6.9      | 8-12              |                                       | Gr2<br>ASTM B338<br>1.4 m <sup>2</sup>  |                                  |  |  |
|  | <b>iMax 60</b>                    | 125-260                         | inverter | 26.8                       | 60.2             | 5.7         | 10.5     | 20-25             | 400/3                                 | Gr 1<br>ASTM265<br>3.0 m <sup>2</sup>   | 61/41                            | 1000x1260x1110                               | 212  |
|  | <b>iMax 110</b>                   | 250-520                         | inverter | 53.5                       | 115.0            | 11.5        | 10.0     | 40-50             |                                       | Gr 1<br>ASTM265<br>6.0 m <sup>2</sup>   | 64/44                            | 2100x1280x1090                               | 459  |

/\* Notes: The manufacturer reserves the right to change the parameters without notice.

**Grade 1** titanium is the first of commercially available pure titanium grades. It is the softest and most ductile type of titanium material. It possesses the greatest formability and excellent corrosion resistance. Grade 1 titanium will ensure long happy life of your heat pump and will also prevent possible transport damage due to its high impact toughness.

**Grade 2** titanium most common within commercially pure titanium grades. It shares many qualities of Grade 1 titanium but given its compound it is slightly stronger than Grade 1. Both are equally corrosion resistant. Grade 2 is easy to weld, strong but less resistant to impact than Grade 1.



| <b>9.2 kW</b><br><b>45 m<sup>3</sup></b> |                   |                      |                      | <b>12.3 kW</b><br><b>55 m<sup>3</sup></b> |                       |                      |
|--|-------------------|----------------------|----------------------|---|-----------------------|----------------------|
| <b>HP 1000 GREEN</b>                     |                   |                      |                      | <b>HP 1400 GREEN</b>                      |                       |                      |
| Cover                                    | COP               | Heating output       | Cooling output       | COP                                       | Heating output        | Cooling output       |
| ABS plastic                              | 6.1<br>(A27 W27)* | 9.2 kW<br>(A27 W27)* | 4.9 kW<br>(A35 W28)* | 6.0<br>(A27 W27)*                         | 12.3 kW<br>(A27 W27)* | 6.2 kW<br>(A35 W28)* |



**SEASON**  
-5~43°C

**HP 1000 GREEN Compact - 1. - 2.**


**HP 1400 GREEN Compact - 1. - 2.**



EXCHANGER EQUIPPED with 0.42 m<sup>2</sup> of TITANIUM



HP 1000 GREEN



| Basic equipment:  | Model:        | Price EXW w/o VAT /EUR/ |
|---|---------------|-------------------------|
| Heat pump (including 4-way valve hot gas defrost and GoldFin), user's manual                  | HP 1000 GREEN | 1 590                   |
| anti VIBRATION + ultra QUIET + easy INSTALL +   | HP 1400 GREEN | 1 690                   |
| <b>1. Wi-Fi:</b>  |               |                         |
| S standard: without Wi-Fi   |               | 0                       |
| W with Wi-Fi  |               | 65                      |
| <b>2. Full year modification:</b>   |               |                         |
| S standard: without WINTER module   |               | 0                       |
| W WINTER module   |               | 385                     |
| <b>Protection cover:</b>  |               |                         |
| Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood |               | 70                      |
| /Rebate does not apply on this item. This is the actual purchase price./                      |               |                         |

**HP 1000 GREEN Split - 1. - 2.**


**HP 1400 GREEN Split - 1. - 2.**



EXCHANGER EQUIPPED with 0.6m<sup>2</sup> of TITANIUM



HP 1400 GREEN




| Basic equipment:  | Model:              | Price EXW w/o VAT /EUR/ |
|---|---------------------|-------------------------|
| Heat pump (including 4-way valve hot gas defrost and GoldFin), user's manual                  | HP 1000 GREEN Split | 1 790                   |
|   | HP 1400 GREEN Split | 1 890                   |
| <b>1. Wi-Fi:</b>  |                     |                         |
| S standard: without Wi-Fi   |                     | 0                       |
| W with Wi-Fi  |                     | 65                      |
| <b>2. Full year modification:</b>   |                     |                         |
| S standard: without WINTER module   |                     | 0                       |
| W WINTER module   |                     | 365                     |
| <b>Protection cover:</b>  |                     |                         |
| Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood |                     | 70                      |
| /Rebate does not apply on this item. This is the actual purchase price./                      |                     |                         |



Protection cover

ALTERNATIVE TO POPULAR **HP OMEGA**



EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)


16.2 kW  
70 m<sup>3</sup>

## HP 1700 GREEN

| Cover       | COP               | Heating output           | Heating output           | Cooling output          |
|-------------|-------------------|--------------------------|--------------------------|-------------------------|
| ABS plastic | 6.0<br>(A27 W27)* | 11.3 kW<br>(A15 W26RH70) | 16.2 kW<br>(A27 W27RH80) | 8.3 kW<br>(A35 W28RH80) |



SEASON  
-5~43°C



### HP 1700 GREEN Compact - 1. - 2.



| Basic equipment:  | Price EXW<br>w/o VAT /EUR/ |
|---|----------------------------|
| Heat pump (including 4-way valve hot gas defrost and GoldFin), user's manual                  | 2 090                      |
| anti VIBRATION + ultra QUIET + easy INSTALL +   |                            |
| <b>1. Wi-Fi:</b>  |                            |
| S standard: without Wi-Fi   | 0                          |
| W with Wi-Fi  | 65                         |
| <b>2. Full year modification:</b>   |                            |
| S standard: without WINTER module   | 0                          |
| W WINTER module   | 385                        |
| <b>Protection cover:</b>  |                            |
| Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood | 70                         |
| <i>/Rebate does not apply on this item. This is the actual purchase price./</i>               |                            |



Protection cover

### HP 1700 GREEN Split - 1. - 2.



| Basic equipment:  | Price EXW<br>w/o VAT /EUR/ |
|---|----------------------------|
| Heat pump (including 4-way valve hot gas defrost and GoldFin), user's manual                  | 2 290                      |
| anti VIBRATION + ultra QUIET + easy INSTALL +   |                            |
| <b>1. Wi-Fi:</b>  |                            |
| S standard: without Wi-Fi   | 0                          |
| W with Wi-Fi  | 65                         |
| <b>2. Full year modification:</b>   |                            |
| S standard: without WINTER module   | 0                          |
| W WINTER module   | 365                        |
| <b>Protection cover:</b>  |                            |
| Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood | 70                         |
| <i>/Rebate does not apply on this item. This is the actual purchase price./</i>               |                            |



EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)




Split heat pump does not require winterizing because its water exchanger is placed in a place where it does not freeze, such as e.g. technical pool room, cellar or land.

WATER EXCHANGER



TECHNICAL POOL ROOM

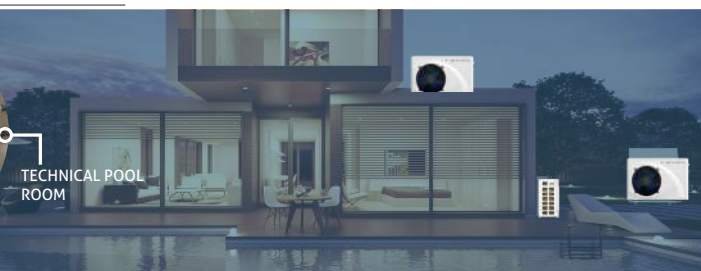

GREEN R32 LINE



v. 02/2021



MICROWELL


10.8 kW  
40 m<sup>3</sup>

## HP 1100 GREEN Inverter Pro



| Cover       | COP                      | Heating output              | Heating output           | Cooling output       |
|-------------|--------------------------|-----------------------------|--------------------------|----------------------|
| ABS plastic | 10.1 - 6.4<br>(A26 W26)* | 8.4 - 10.8 kW<br>(A26 W26)* | 12.4 kW<br>(A27 W15RH80) | 4.5 kW<br>(A35 W28)* |

**FULL YEAR**  
-15~43°C



### HP 1100 GREEN Inverter Pro Compact



**Basic equipment:**

Price EXW  
w/o VAT /EUR/

Heat pump /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

**2 390**

anti VIBRATION + ultra QUIET + easy INSTALL +

**Protection cover:**

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

70

*/Rebate does not apply on this item. This is the actual purchase price./*



### HP 1100 GREEN Inverter Pro Split - 1.



**Basic equipment:**

Price EXW  
w/o VAT /EUR/

Split heat pump - separate water unit with remote installation /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

**2 850**

anti VIBRATION + ultra QUIET + easy INSTALL +



**1. Control display placement:**

**S** standard: control display placed on the heat pump

0

**W** wall installation (out of the heat pump), includes wall plaster box IP44, 10m cable, touch controller with Wi-Fi

150

**Protection cover:**

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

70

*/Rebate does not apply on this item. This is the actual purchase price./*



EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

★ **5 years WARRANTY**  
ON COMPRESSOR ★

★ **5 years WARRANTY**  
ON TITANIUM HEAT EXCHANGER ★

★ **2 years WARRANTY**  
ON SPARE PARTS ★

GREEN R32 LINE



15 kW  
60 m<sup>3</sup>

## HP 1500 GREEN Inverter Pro

| Cover       | COP                      | Heating output             | Heating output           | Cooling output       |
|-------------|--------------------------|----------------------------|--------------------------|----------------------|
| ABS plastic | 10.6 - 6.4<br>(A26 W26)* | 11.4 - 15 kW<br>(A26 W26)* | 17.3 kW<br>(A27 W15RH8o) | 6.7 kW<br>(A35 W28)* |



FULL YEAR  
-15~43°C



990mm  
657mm  
340mm

### HP 1500 GREEN Inverter Pro Compact



#### Basic equipment:

Heat pump /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

Price EXW  
w/o VAT /EUR/

2 895

anti VIBRATION + ultra QUIET + easy INSTALL +

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

70

/Rebate does not apply on this item. This is the actual purchase price./



### HP 1500 GREEN Inverter Pro Split - 1.



#### Basic equipment:

Split heat pump - separate water unit with remote installation /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

Price EXW  
w/o VAT /EUR/

3 350

anti VIBRATION + ultra QUIET + easy INSTALL +



#### 1. Control display placement:

**S** standard: control display placed on the heat pump

0

**W** wall installation (out of the heat pump), includes wall plaster box IP44, 10m cable, touch controller with Wi-Fi

150

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

70

/Rebate does not apply on this item. This is the actual purchase price./



★ 5 years WARRANTY ON COMPRESSOR ★

★ 5 years WARRANTY ON TITANIUM HEAT EXCHANGER ★

★ 2 years WARRANTY ON SPARE PARTS ★



EURO PALETTE packed, FUMIGATED  
6€/1pc (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



v. 02/2021

MICROWELL

17 kW  
95 m<sup>3</sup>

## HP 1700 GREEN Inverter Pro


| Cover       | COP                      | Heating output               | Heating output           | Cooling output       |
|-------------|--------------------------|------------------------------|--------------------------|----------------------|
| ABS plastic | 10.2 - 6.2<br>(A26 W26)* | 17.0 - 11.5 kW<br>(A26 W26)* | 19.6 kW<br>(A27 W15RH8o) | 7.5 kW<br>(A35 W28)* |



**FULL YEAR**  
-15~43°C



EXCHANGER  
EQUIPPED with  
0.8m<sup>2</sup>  
of TITANIUM



### HP 1700 GREEN Inverter Pro Compact



**Basic equipment:** Price EXW w/o VAT /EUR/

Heat pump /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual **3 190**

anti VIBRATION + ultra QUIET + easy INSTALL +

**Protection cover:** Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood 110  
/Rebate does not apply on this item. This is the actual purchase price./



### HP 1700 GREEN Inverter Pro Split - 1.



**Basic equipment:** Price EXW w/o VAT /EUR/

Split heat pump - separate water unit with remote installation /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual **3 680**

anti VIBRATION + ultra QUIET + easy INSTALL +

-15°C

COP 14

#### 1. Control display placement:

|   |     |
|---|-----|
| <b>S</b> standard: control display placed on the heat pump  | 0   |
| <b>W</b> wall installation (out of the heat pump), includes wall plaster box IP44, 10m cable, touch controller with Wi-Fi | 150 |

**Protection cover:** Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood 70  
/Rebate does not apply on this item. This is the actual purchase price./



W



EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

★ **5 years WARRANTY** ON COMPRESSOR ★

★ **5 years WARRANTY** ON TITANIUM HEAT EXCHANGER ★

★ **2 years WARRANTY** ON SPARE PARTS ★

GREEN R32 LINE

## GET TO KNOW

### MICROWELL HP GREEN Inverter Pro

| Parameter                | HP Inverter                               |
|--------------------------|---|
| SALT OR SEA WATER USAGE  | yes                                       |
| DIGITAL TOUCH DISPLAY    | yes                                       |
| HEATING                  | yes                                       |
| COOLING                  | yes                                       |
| ANTIFROST + DEFROSTING   | yes                                       |
| WINTER USAGE             | -15°C                                     |
| JACUZZI HEATING          | +40 °C water                              |
| SAUNA CHILL POOL COOLING | +12 °C water                              |
| WATER FLOW CONTROL       | yes                                       |
| BUILT-IN Wi-Fi           | yes                                       |
| WATER EXCHANGER          | Titanium Gr.1 ASTM 265                    |
| TITANIUM TUBE MAKE       | Dual twisted for maximum titanium surface |
| AIR EXCHANGER            | GoldFin                                   |
| SILENT MODE              | yes, 65%                                  |
| BOOST MODE               | yes                                       |
| COMPRESSOR               | Twin rotary Mitsubishi                    |
| MATERIAL                 | Antivibration ABS on a metal chassis      |
| COLOR                    | grey                                      |

Notice: Manufacturer reserves the right to change the technical parameters without notice.




24.2 kW  
105 m<sup>3</sup>

## HP 2100 GREEN Inverter Pro

| Cover    | COP                    | Heating output          | Heating output                  | Cooling output       |
|----------|------------------------|-------------------------|---------------------------------|----------------------|
| ALUMINUM | 14.8~6.4<br>(A26 W26)* | 14.5-21kW<br>(A26 W26)* | <b>24.2 kW</b><br>(A27 W15RH8o) | 9.5 kW<br>(A35 W28)* |



**FULL YEAR**  
-15~43°C



### HP 2100 GREEN Inverter Pro Compact



| Basic equipment:  | Price EXW<br>w/o VAT /EUR/ |
|---|----------------------------|
| Heat pump /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual<br><b>anti VIBRATION + ultra QUIET + easy INSTALL +</b> | <b>4 890</b>               |
| <b>Protection cover:</b><br>Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood<br><i>/Rebate does not apply on this item. This is the actual purchase price./</i>  | 110                        |



### HP 2100 GREEN Inverter Pro Split - 1.



| Basic equipment:   | Price EXW<br>w/o VAT /EUR/ |
|--|----------------------------|
| Split heat pump - separate water unit with remote installation /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual<br><b>anti VIBRATION + ultra QUIET + easy INSTALL +</b> | <b>5 150</b>               |
| <b>1. Control display placement:</b>   |                            |
| <b>S</b> standard: control display placed on the heat pump   | 0                          |
| <b>W</b> wall installation (out of the heat pump), includes wall plaster box IP44, 10m cable, touch controller with Wi-Fi  | 150                        |
| <b>Protection cover:</b><br>Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood<br><i>/Rebate does not apply on this item. This is the actual purchase price./</i>   | 70                         |



W



EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

★ **5 years WARRANTY** ON COMPRESSOR ★

★ **5 years WARRANTY** ON TITANIUM HEAT EXCHANGER ★

★ **2 years WARRANTY** ON SPARE PARTS ★

GREEN R32 LINE

31.6 kW  
135 m<sup>3</sup>

## HP 2700 GREEN Inverter Pro

| Cover    | COP                  | Heating output             | Heating output           | Cooling output        |
|----------|----------------------|----------------------------|--------------------------|-----------------------|
| ALUMINUM | 15~6.8<br>(A26 W26)* | 18 - 27.5 kW<br>(A26 W26)* | 31.6 kW<br>(A27 W15RH80) | 11.9 kW<br>(A35 W28)* |



**FULL YEAR**  
-15~43°C



EXCHANGER  
EQUIPPED with  
**1.0m<sup>2</sup>**  
of TITANIUM



948mm  
1084mm  
429mm



FULL STEPLESS INVERTER HEAT PUMPS

### HP 2700 GREEN Inverter Pro Compact



#### Basic equipment:

Price EXW  
w/o VAT /EUR/

Heat pump /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

5 390

anti VIBRATION + ultra QUIET + easy INSTALL +

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

120

/Rebate does not apply on this item. This is the actual purchase price./

### HP 2700 GREEN Inverter Pro Split



#### Basic equipment:

Price EXW  
w/o VAT /EUR/

Split heat pump - separate water unit with remote installation /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

5 590

anti VIBRATION + ultra QUIET + easy INSTALL +



#### 1. Control display placement:

**S** standard: control display placed on the heat pump

0

**W** wall installation (out of the heat pump), includes wall plaster box IP44, 10m cable, touch controller with Wi-Fi


150

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

70

/Rebate does not apply on this item. This is the actual purchase price./



EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

★ 5 years WARRANTY ON COMPRESSOR ★

★ 5 years WARRANTY ON TITANIUM HEAT EXCHANGER ★

★ 2 years WARRANTY ON SPARE PARTS ★



v. 02/2021

MICROWELL

23 kW  
80 m<sup>3</sup>

# HP 2300 COMPACT Inventor



| Cover | COP                     | Heating output               | Cooling output        |
|-------|-------------------------|------------------------------|-----------------------|
| metal | 5.8 - 7.6<br>(A26 W26)* | 20.9 - 27.2 kW<br>(A26 W26)* | 20.1 kW<br>(A30 W35)* |




## HP 2300 COMPACT I - 1. - 2. - 3. - 4. - 5. - 6.

| Basic equipment:   | Price EXW<br>w/o VAT /EUR/ |
|--|----------------------------|
| Heat pump (including GoldFin), user's manual   |                            |
| micro COMPRESSOR +<br>anti VIBRATION +   | 4 100                      |
| micro ECONOMY +<br>anti FREEZE +   |                            |
| <b>1. Condensate tray defrost:</b><br>S standard: without defrost<br>W with defrost  | 0<br>325                   |
| <b>2. Full year modification:</b><br>S standard: without WINTER module (-5°C...+40°C)<br>W with WINTER module (-15°C...+40°C)  | 0<br>550                   |
| <b>3. Heat exchanger frost protection:</b><br>S standard: without frost protection<br>W with frost protection  | 0<br>325                   |
| <b>4. Tropical / Chiller adjustment:</b><br>S standard: without<br>T TROPICAL KIT (extra compressor cooling) ... up to 60°C ambient air<br>C CHILLER (extra thermal insulation) ... to allow water cooling to +5°C | 0<br>270<br>215            |
| <b>5. Control display placement:</b><br>S standard: control display placed on the heat pump<br>W wall installation (out of the heat pump), includes wall plaster box, 30m cable                                    | 0<br>37                    |
| <b>6. Wi-Fi:</b><br>S standard: without Wi-Fi<br>W with Wi-Fi  | 0<br>49                    |
| <b>Protection cover:</b><br>Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood<br>/Rebate does not apply on this item. This is the actual purchase price./              | 140                        |
| <b>Self-regulating heating cable:</b><br>230V/4m/64W, Euro plug 2m, IP68<br>/Rebate does not apply on this item. This is the actual purchase price./   | 28.50                      |
| <b>Complete WINTER PACKAGE for better price:</b><br>The package includes: <b>1.</b> Condensate tray defrost, <b>2.</b> WINTER module, <b>3.</b> Heat exchanger frost protection                                    | 968                        |



ALLOWING HEAT PUMP USAGE IN AMBIENT AIR FROM +42°C TO +60°C.



EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



23 kW  
80 m<sup>3</sup>

# HP 2300 SPLIT Inventor




| Cover | COP                     | Heating output               | Cooling output        |
|-------|-------------------------|------------------------------|-----------------------|
| metal | 5.8 - 7.6<br>(A26 W26)* | 20.9 - 27.2 kW<br>(A26 W26)* | 20.1 kW<br>(A30 W35)* |




EXCHANGER EQUIPPED WITH  
**0.95**  
m<sup>2</sup>  
of TITANIUM

## HP 2300 SPLIT I - 1. - 2. - 3. - 4. - 5. - 6. - 7.

| Basic equipment:  | Price EXW<br>w/o VAT /EUR/ |
|---|----------------------------|
| Air unit, including GoldFin, user's manual<br>micro COMPRESSOR + micro ECONOMY + ultra QUIET +<br>anti VIBRATION + anti FREEZE +  | <b>2 500</b>               |
| <b>1. Hydro kit (unit with water heat exchanger):</b><br>S standard: without box (installation in technical room)   | 1 600                      |
| <b>2. Control display placement:</b><br>S standard: digital display placed on outside unit (air unit)   | 0                          |
| W wall installation (out of the heat pump), includes wall plaster box, 30m cable  | 21                         |
| <b>3. Wi-Fi:</b><br>S standard: without Wi-Fi   | 0                          |
| W with Wi-Fi  | 49                         |
| <b>4. Condensate tray defrost:</b><br>S standard: without defrost   | 0                          |
| W with defrost  | 325                        |
| <b>5. Heat exchanger frost protection:</b><br>S standard: without frost protection  | 0                          |
| W with frost protection   | 325                        |
| <b>6. Full year modification:</b><br>S standard: without WINTER module (-5°C...+40°C)   | 0                          |
| W with WINTER module (-15°C...+40°C)  | 550                        |
| <b>7. Tropical / Chiller adjustment:</b><br>S standard: without   | 0                          |
| T TROPICAL KIT (extra compressor cooling) ... up to 60°C ambient air  | 270                        |
| C CHILLER (extra thermal insulation) ... to allow water cooling to +5°C   | 215                        |
| <b>Protection cover:</b><br>Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood<br>/Rebate does not apply on this item. This is the actual purchase price./ | 120                        |
| <b>Complete WINTER PACKAGE for better price:</b><br>The package includes: 1. Condensate tray defrost, 2. WINTER module, 3. Heat exchanger frost protection  | 968                        |

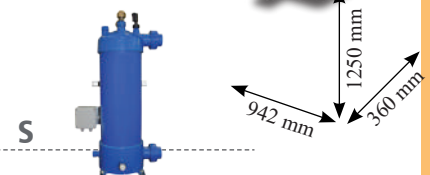

ALLOWING HEAT PUMP USAGE IN AMBIENT AIR FROM +42°C TO +60°C.



EURO PALLETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)




### Various range of ACCESSORIES - more on pages 51-55

- Air ducting and grills
- Floor grills
- Equipment for installation and services
- micro LIGHT

**24.4 kW**  
**80 m<sup>3</sup>**

## HP 2400 COMPACT Premium

| Cover | COP  | Heating output  | Cooling output                                 |
|-------|--|---|--|
| metal | 6.5 - 8.5<br>(A <sub>26</sub> W <sub>26</sub> )* | 22.2 - 28.8 kW<br>(A <sub>26</sub> W <sub>26</sub> )* | 21.7 kW<br>(A <sub>30</sub> W <sub>35</sub> )* |



### HP 2400 COMPACT P

#### Basic equipment:

- Heat pump (including GoldFin),
- Full year operation down to -15°C (including complete Winter package: condensate tray defrost, heat exchanger frost protection, winter module),
- Tropical kit allowing operations up to +60°C ambient air,
- Water cooling down to +5°C (chiller),
- Wi-Fi by standard TUYA IOT based App for iOS/Android Smart "POOL VISION",
- Remote wall controller including 30m cable,
- Thermally insulated water exchanger,
- User's manual

**Price EXW**  
w/o VAT /EUR/

**5 030**

- micro COMPRESSOR +    micro ECONOMY +    ultra QUIET +
- anti VIBRATION +    anti FREEZE +

#### Protection cover:


Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood 140  
/Rebate does not apply on this item. This is the actual purchase price./

#### Self-regulating heating cable:

230V/4m/64W, Euro plug 2m, IP68 28.50  
/Rebate does not apply on this item. This is the actual purchase price./



**EURO PALETTE** packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).

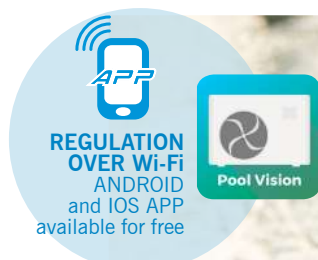



24.4 kW  
80 m<sup>3</sup>

## HP 2400 SPLIT Premium

| Cover | COP                     | Heating output               | Cooling output        |
|-------|-------------------------|------------------------------|-----------------------|
| metal | 6.5 - 8.5<br>(A26 W26)* | 22.2 - 28.8 kW<br>(A26 W26)* | 21.7 kW<br>(A30 W35)* |



SWIMMING POOL HEAT PUMPS

### HP 2400 SPLIT P



#### Basic equipment:

- Air unit (including GoldFin) + Hydro kit (without box)
- Full year operation down to -15°C, (including complete Winter package: condensate tray defrost, winter module),
- Tropical kit allowing operations up to +60°C ambient air,
- Water cooling down to +5°C (chiller),
- Wi-Fi by standard TUYA IOT based App for iOS/Android Smart "POOL VISION",
- Remote wall controller including 30m cable,
- Thermally insulated water exchanger,
- User's manual

Price EXW  
w/o VAT /EUR/

5 030

micro COMPRESSOR + micro ECONOMY +

anti VIBRATION + anti FREEZE + ultra QUIET +

#### Protection cover:


Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

120

/Rebate does not apply on this item. This is the actual purchase price./



ALLOWING HEAT PUMP USAGE IN AMBIENT AIR FROM +42°C TO +60°C.



EURO PALLETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

Full-fledged compact heat pump in full equipment **also for salt pools**



v. 02/2021

MICROWELL

28.4 kW  
120 m<sup>3</sup>

# HP 2800 COMPACT Inventor




| Cover | COP                     | Heating output               | Cooling output      |
|-------|-------------------------|------------------------------|---------------------|
| metal | 5.8 - 7.6<br>(A26 W26)* | 25.8 - 33.5 kW<br>(A26 W26)* | 25 kW<br>(A30 W35)* |




EXCHANGER  
EQUIPPED with  
**1,2**  
m<sup>2</sup>  
of TITANIUM

## HP 2800 COMPACT I - 1. - 2. - 3. - 4. - 5. - 6.

| Basic equipment:  | Price EXW<br>w/o VAT /EUR/ |
|---|----------------------------|
| Heat pump (including GoldFin), user's manual  |                            |
| <span>micro COMPRESSOR +</span> <span>micro ECONOMY +</span> <span>ultra QUIET +</span>   | <b>4 600</b>               |
| <span>anti VIBRATION +</span> <span>anti FREEZE +</span>  |                            |
| <b>1. Condensate tray defrost:</b>  |                            |
| <b>S</b> standard: without defrost  | 0                          |
| <b>W</b> with defrost   | 325                        |
| <b>2. Full year modification:</b>   |                            |
| <b>S</b> standard: without WINTER module (-5°C...+40°C)   | 0                          |
| <b>W</b> with WINTER module (-15°C...+40°C)   | 550                        |
| <b>3. Heat exchanger frost protection:</b>  |                            |
| <b>S</b> standard: without frost protection   | 0                          |
| <b>W</b> with frost protection  | 325                        |
| <b>4. Tropical / Chiller adjustment:</b>  |                            |
| <b>S</b> standard: without  | 0                          |
| <b>T</b> TROPICAL KIT (extra compressor cooling) ... up to 60°C ambient air   | 270                        |
| <b>C</b> CHILLER (extra thermal insulation) ... to allow water cooling to +5°C  | 215                        |
| <b>5. Control display placement:</b>  |                            |
| <b>S</b> standard: control display placed on the heat pump  | 0                          |
| <b>W</b> wall installation (out of the heat pump), includes wall plaster box, 30m cable   | 37                         |
| <b>6. Wi-Fi:</b>  |                            |
| <b>S</b> standard: without Wi-Fi  | 0                          |
| <b>W</b> with Wi-Fi   | 49                         |
| <b>Protection cover:</b>  |                            |
| Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood<br>/Rebate does not apply on this item. This is the actual purchase price./ | 140                        |
| <b>Self-regulating heating cable:</b>   |                            |
| 230V/4m/64W, Euro plug 2m, IP68<br>/Rebate does not apply on this item. This is the actual purchase price./   | 28.50                      |
| <b>Complete WINTER PACKAGE for better price:</b>  |                            |
| The package includes: <b>1.</b> Condensate tray defrost, <b>2.</b> WINTER module, <b>3.</b> Heat exchanger frost protection   | 968                        |



ALLOWING HEAT PUMP  
USAGE IN AMBIENT  
AIR FROM **+42°C TO  
+60°C.**



EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

REGULATION OVER Wi-Fi  
ANDROID and IOS APP available for free  
Smart HP



28.4 kW  
120 m<sup>3</sup>

# HP 2800 SPLIT Inventor




| Cover | COP                     | Heating output               | Cooling output      |
|-------|-------------------------|------------------------------|---------------------|
| metal | 5.8 - 7.6<br>(A26 W26)* | 25.8 - 33.5 kW<br>(A26 W26)* | 25 kW<br>(A30 W35)* |



SWIMMING POOL HEAT PUMPS

## HP 2800 SPLIT I - 1. - 2. - 3. - 4. - 5. - 6. - 7.

| Basic equipment:  | Price EXW<br>w/o VAT /EUR/ |
|---|----------------------------|
| Air unit, including GoldFin, user's manual<br>micro COMPRESSOR + micro ECONOMY + ultra QUIET +<br>anti VIBRATION + anti FREEZE +  | 2 750                      |
| <b>1. Hydro kit (unit with water heat exchanger):</b>   |                            |
| S standard: without box (installation in technical room)  | 1 790                      |
| <b>2. Control display placement:</b>  |                            |
| S standard: digital display placed on outside unit (air unit)   | 0                          |
| W wall installation (out of the heat pump), includes wall plaster box, 30m cable  | 21                         |
| <b>3. Wi-Fi:</b>  |                            |
| S standard: without Wi-Fi   | 0                          |
| W with Wi-Fi  | 49                         |
| <b>4. Condensate tray defrost:</b>  |                            |
| S standard: without defrost   | 0                          |
| W with defrost  | 325                        |
| <b>5. Heat exchanger frost protection:</b>  |                            |
| S standard: without frost protection  | 0                          |
| W with frost protection   | 325                        |
| <b>6. Full year modification:</b>   |                            |
| S standard: without WINTER module (-5°C...+40°C)  | 0                          |
| W with WINTER module (-15°C...+40°C)  | 550                        |
| <b>7. Tropical / Chiller adjustment:</b>  |                            |
| S standard: without   | 0                          |
| T TROPICAL KIT (extra compressor cooling) ... up to 60°C ambient air  | 270                        |
| C CHILLER (extra thermal insulation) ... to allow water cooling to +5°C   | 215                        |
| <b>Protection cover:</b>  |                            |
| Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood<br>/Rebate does not apply on this item. This is the actual purchase price./ | 120                        |
| <b>Complete WINTER PACKAGE for better price:</b>  |                            |
| The package includes: 1. Condensate tray defrost, 2. WINTER module, 3. Heat exchanger frost protection  | 968                        |



EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)




### Various range of ACCESSORIES - more on pages 51-55

- Air ducting and grills
- Floor grills
- Equipment for installation and services
- micro LIGHT

**30.1kW**  
**120 m<sup>3</sup>**

## HP 3000 COMPACT Premium

| Cover | COP                     | Heating output               | Cooling output        |
|-------|-------------------------|------------------------------|-----------------------|
| metal | 6.5 - 8.5<br>(A26 W26)* | 27.4 - 35.5 kW<br>(A26 W26)* | 26.8 kW<br>(A30 W35)* |



### HP 3000 COMPACT P

#### Basic equipment:

- Heat pump (including GoldFin),
- Full year operation down to -15°C (including complete Winter package: condensate tray defrost, heat exchanger frost protection, winter module),
- Tropical kit allowing operations up to +60°C ambient air,
- Water cooling down to +5°C (chiller),
- Wi-Fi by standard TUYA IOT based App for iOS/Android Smart "POOL VISION",
- Remote wall controller including 30m cable,
- Thermally insulated water exchanger,
- User's manual

**Price EXW**  
w/o VAT /EUR/

**5 500**

- micro COMPRESSOR +    micro ECONOMY +    ultra QUIET +
- anti VIBRATION +    anti FREEZE +

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

140

#### Self-regulating heating cable:

230V/4m/64W, Euro plug 2m, IP68

28.50




**EURO PALETTE** packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).



30.1 kW  
120 m<sup>3</sup>

## HP 3000 SPLIT Premium

| Cover | COP                     | Heating output               | Cooling output        |
|-------|-------------------------|------------------------------|-----------------------|
| metal | 6.5 - 8.5<br>(A26 W26)* | 27.4 - 35.5 kW<br>(A26 W26)* | 26.8 kW<br>(A30 W35)* |



### HP 3000 SPLIT P



#### Basic equipment:

- Air unit (including GoldFin) + Hydro kit (without box)
- Full year operation down to -15°C, (including complete Winter package: condensate tray defrost, winter module),
- Tropical kit allowing operations up to +60°C ambient air,
- Water cooling down to +5°C (chiller),
- Wi-Fi by standard TUYA IOT based App for iOS/Android Smart "POOL VISION",
- Remote wall controller including 30m cable,
- Thermally insulated water exchanger,
- User's manual

Price EXW  
w/o VAT /EUR/

5 500

micro COMPRESSOR +

micro ECONOMY +

anti VIBRATION +

anti FREEZE +

ultra QUIET +

#### Protection cover:


Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

120

/Rebate does not apply on this item. This is the actual purchase price./



ALLOWING HEAT PUMP USAGE IN AMBIENT AIR FROM +42°C TO +60°C.



EURO PALETTE packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

Full-fledged compact heat pump in full equipment **also for salt pools**



v. 02/2021

MICROWELL

| 60kW<br>260 m <sup>3</sup> <b>iMax 60</b> |                    |                       |                       | 115kW<br>520 m <sup>3</sup> <b>iMax 110</b> |                        |                       |
|---|--------------------|-----------------------|-----------------------|---|------------------------|-----------------------|
| Cover                                     | COP                | Heating output        | Cooling output        | COP   | Heating output         | Cooling output        |
| ABS plastic                               | 10.5<br>(A27 W27)* | 60.2 kW<br>(A27 W27)* | 26.8 kW<br>(A35 W28)* | 10.0<br>(A27 W27)*                          | 115.0 kW<br>(A27 W27)* | 53.5 kW<br>(A35 W28)* |

**iMax 60 HC - heating & cooling**  
**iMax 110 HC - heating & cooling**

*HP Inverter Technology*

heating cooling

**DC Inverter**  
Average COP 10

**53dB(A) at 1m**  
Comfort Silence

**Wi-Fi**  
Built-in


| Basic equipment:                                | Model:                 | Price EXW w/o VAT /EUR/ |
|---|------------------------|-------------------------|
| Heat pump, user's manual                        |                        |                         |
| Operating air temperature: <b>-10°C ~ +43°C</b> | 60 kW <b>iMax 60</b>   | <b>8 400</b>            |
|   | 115 kW <b>iMax 110</b> | <b>15 200</b>           |



**iMax 60 H - heating**  
**iMax 110 H - heating**



| Basic equipment:                               | Model:                 | Price EXW w/o VAT /EUR/ |
|--|------------------------|-------------------------|
| Heat pump, user's manual                       |                        |                         |
| Operating air temperature: <b>-7°C ~ +43°C</b> | 60 kW <b>iMax 60</b>   | <b>8 200</b>            |
|  | 115 kW <b>iMax 110</b> | <b>14 900</b>           |

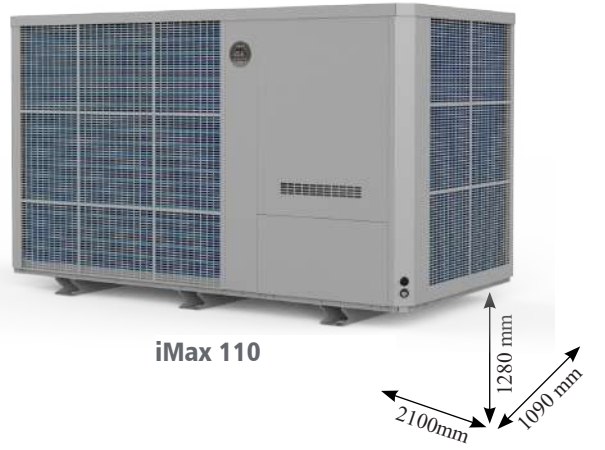

**iMax 60 Tropical HC - heating & cooling**  
**iMax 110 Tropical HC - heating & cooling**



| Basic equipment:                              | Model:                 | Price EXW w/o VAT /EUR/ |
|---|------------------------|-------------------------|
| Heat pump, user's manual                      |                        |                         |
| Operating air temperature: <b>0°C ~ +55°C</b> | 60 kW <b>iMax 60</b>   | <b>9 600</b>            |
|   | 115 kW <b>iMax 110</b> | <b>17 500</b>           |

/Standard discount conditions do not apply on above stated prices./

**EURO PALETTE** packed, FUMIGATED  
**6€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

**Designed for public /commercial applications such as public pools, hotel pools, school pools.**

125m<sup>3</sup> – 520m<sup>3</sup> Pool Available

# Pool Heat pump

## COMMERCIAL INVERTER MAX




125m<sup>3</sup> - 520m<sup>3</sup> Pool Available

Commercial Inverter Max line is primarily designed for public/commercial applications such as public pools, hotel pools, school pools.

They provide cutting edge Inverter technology and can serve a pool of up to 520m<sup>3</sup> with one unit. Multiple units could be used to serve bigger volumes.



Wi-Fi Built-in Touch Controller

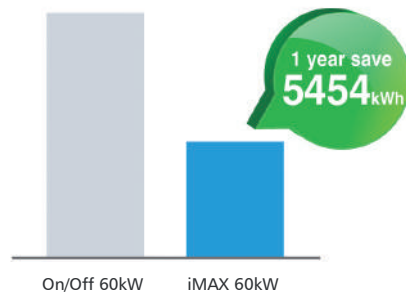

# ACCESSORIES & Spare parts



Measurement and regulation

Installation material and equipment

Spare parts

Water surface covering

Ventilation





# Qmax - Heat pump TESTER

Save up to  
**30%**  
on energy bill  
€

|       |                      |
|-------|----------------------|
| Cover | Measurement accuracy |
| metal | ± 5%                 |



Carry-on measurement device designed to provide measurement and optimization of heat pump's performance and efficiency

Price EXW  
w/o VAT /EUR/

### Basic equipment:

- Carry on measurement device with inductive flow meter KROHNE Optiflux 2050 with connection DN50
- A pair of mobile WIKA Pt100 resistance thermometers
- Measurement device



## 1. Qmax-TESTER



**measures:** water temperature inlet & outlet, true heating or cooling output, heat pump power consumption, water flow  
**counts:** Coefficient of performance /COP/, Energy efficiency ratio /EER/

2 890

## 2. Heat pump's OPTIMIZATION

executed by a Microwell trained technician

99



**IMMEDIATE TESTING**  
OF A HEAT PUMP



**COMPATIBLE**  
WITH ALL 1 PHASE HP

WATCH VIDEO & LEARN MORE



FOR SETTING THE QUALITY  
of pool performance



/General discount does not apply on above stated prices.  
Stated prices are final./



**MICROWELL**

## 1. FLOAT SWITCHES FOR EQUALIZING TANKS

| Float switches for equalizing tanks | Price EXW<br>w/o VAT /EUR/ |
|-------------------------------------|----------------------------|
|-------------------------------------|----------------------------|

### 1.1. NIVOCONT - conductive level switch

|  |       |
|--|-------|
| 1.1.A KSN-201 - probe from stainless steel | 33.60 |
|--|-------|


|                         |       |
|-------------------------|-------|
| 1.1.B KRK-512-5 - relay | 47.30 |
|-------------------------|-------|

### 1.2. NIVOFLOAT - plastic level switch

|  |       |
|--|-------|
| 1.2.A NLP-110 - plastic level float switch (PVC cable 10m) | 31.80 |
|--|-------|

### 1.3. NIVOPOINT - multiple switching point magnetic level switch:

|   |        |
|---|--------|
| 1.3.A MRA-210-3 - multiple switching point level switch with wetted parts from stainless steel (1" thread, 2 switching points, probe tube 1m) | 204.00 |
|---|--------|

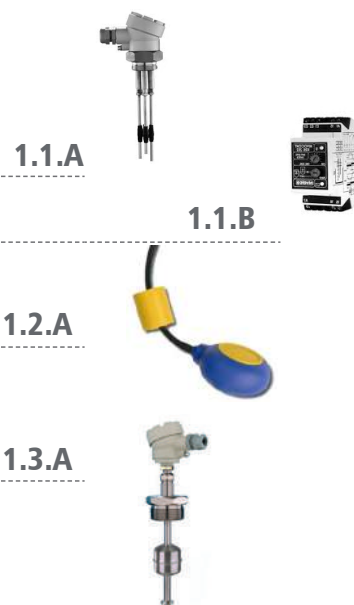


## 2. HUMIDITY AND TEMPERATURE METER in 1

| Device for indoor humidity and temperature measuring | Price EXW<br>w/o VAT /EUR/ |
|--|----------------------------|
|--|----------------------------|

### 2.1. Thermo-humidistat BEURER HM 16

|   |       |
|---|-------|
| Humidity 20% to 95%<br>Air temperature 0°C ~ +50°C<br>Selection °C/°F<br>Wall installation / flipping holder<br>Well readable display<br>Measurement accuracy ± 5%<br>Battery 1x 1.5V | 14.40 |
|---|-------|

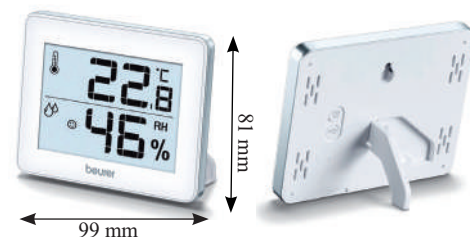

### 2.2. PROFESSIONAL- GFTH 95 (professional application)

|  |        |
|--|--------|
| Humidity measurement accuracy: ± 1,5%<br>1 line LCD<br>Battery included 1x 9V, typ IEC 6F22<br>Body: ABS | 153.00 |
|--|--------|



/Change in price and offered products reserved./

### 3. HUMIDITY VISUALIZATION

micro LIGHT +



Price EXW  
w/o VAT /EUR/

#### 3.1. microLIGHT+ INFINITY

Operational temperature range: 0°C ... +60°C.  
Compatibility: All DRY range

|       |                                  |        |
|-------|----------------------------------|--------|
| 3.1.A | microLIGHT+ INFINITY, length 1 m | 183.00 |
| 3.1.B | microLIGHT+ INFINITY, length 3 m | 213.00 |
| 3.1.C | microLIGHT+ INFINITY, length 5 m | 228.00 |

#### 3.2. microLIGHT+ LAMP

A freestanding table lamp.  
MicroLIGHT+ LAMP measures and automatically reflects current relative humidity, changing the colour gradient between blue, green and red colour.


|       |                  |        |
|-------|------------------|--------|
| 3.2.A | microLIGHT+ LAMP | 105.00 |
|-------|------------------|--------|

/Change in Lamp model reserved./

#### 3.3. microSTEAM+

Operational temperature range: 0°C ... +120°C.  
Designed for ceilings of the swimming pool halls as LED humidistat for saunas.

|       |                         |        |
|-------|-------------------------|--------|
| 3.3.A | microSTEAM+, length 1 m | 229.00 |
| 3.3.B | microSTEAM+, length 2 m | 253.00 |

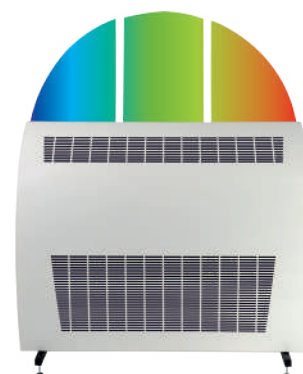


ACCESSORIES & Spare parts

micro LIGHT +

Integrated LED light strip indicating current humidity in a pool.  
Light spectrum from blue (humidity low) through green (all OK) to red (problem – humidity high) in full color gradient.



*Humidity you can see...*

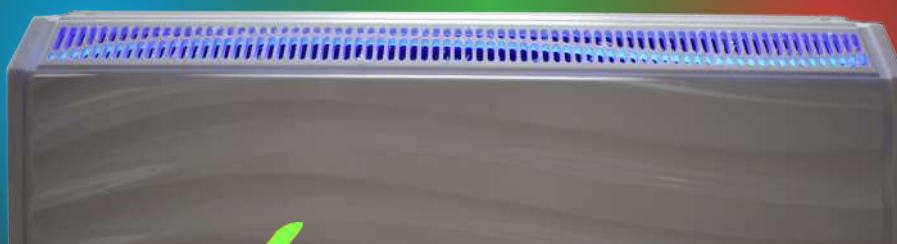

v. 02/2021

MICROWELL

## 4. FLOOR GRILLS

/Actual price to be quoted based on an individual enquiry./

**Price EXW**  
w/o VAT /EUR/


### 4.1. Basic structure

|   |                    |
|---|--------------------|
| <b>4.1.A</b> Symmetrical ASS                | from <b>154.00</b> |
| <b>4.1.B</b> Asymmetrical ASU               | from <b>160.00</b> |
| <b>4.1.C</b> Asymmetrical removable ASR     | from <b>207.00</b> |
| <b>4.1.D</b> LED Asymmetrical removable ASR | from <b>352.00</b> |




### 4.2. Fixation

|  |                    |
|--|--------------------|
| <b>4.2.A</b> Mounting rail AS-BF         | from <b>34.50</b>  |
| <b>4.2.B</b> Substructure channel AS-UBK | from <b>252.00</b> |

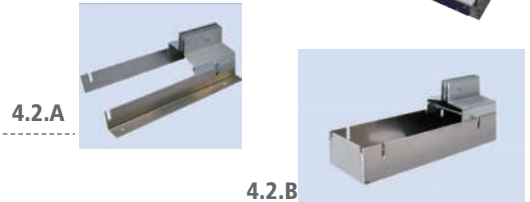

### 4.3. Accessories

|   |                   |
|---|-------------------|
| <b>4.3.A</b> Comer AS-GS  | from <b>69.90</b> |
| <b>4.3.B</b> Diffuser AS-DLV  | from <b>11.40</b> |
| <b>4.3.C</b> Construction works protection cover AS-AP                                    | from <b>6.50</b>  |
| <b>4.3.D</b> Cut out for substructure channel AS-UBK-A                                    | from <b>13.00</b> |
| <b>4.3.E</b> Substructure channel socket AS-UBK-ZSR                                       | from <b>28.40</b> |
| <b>4.3.F</b> Side cut out with socket for mounting rail or substructure channel AS-UBK-ZS | from <b>28.40</b> |
| <b>4.3.G</b> End cover AS-END   | from <b>16.80</b> |
| <b>4.3.H</b> Condensate drain for substructure channel AS-UBK-AS                          | from <b>47.00</b> |

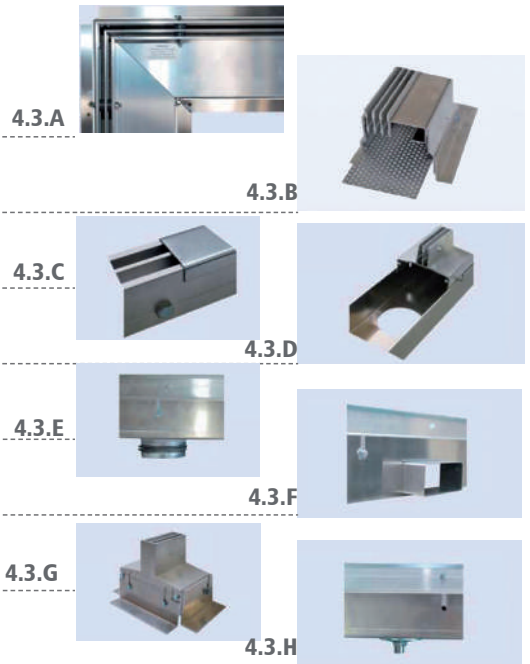

/Price change reserved./



## 5. INSTALLATION MATERIAL

| 5.1 for SWIMMING POOL DEHUMIDIFIERS installation   |   | unit             | Price EXW<br>w/o VAT /EUR/ |
|--|---|------------------|----------------------------|
| <b>5.1.1. Pumps and accessories</b>                |   |                  |                            |
| 5.1.1.A  | Pump SI 82 – condensing, with tank 2l, 500l/h, max. 5m /No. 7012/ | 1 pc             | <b>75.00</b>               |
| 5.1.1.B  | Condensate hose 16mm  | 1 standard meter | <b>0.95</b>                |
| <b>5.1.2. Cleaning and disinfection appliances</b> |   |                  |                            |
| 5.1.2.A  | Easy Care spray – evaporator cleaner and disinfection /No. 5008/  | 1 pc             | <b>14.10</b>               |
| <b>5.1.3. In-wall condensate siphons</b>           |   |                  |                            |
| 5.1.3.A  | In-wall condensate siphon HL 138, DN32/20 /No. 7103/              | 1 pc             | <b>30.00</b>               |
| <b>5.1.4. Anti odor siphons</b>                    |   |                  |                            |
| 5.1.4.A  | Siphon (anti-odor trap) for condensation hose                     | 1 pc             | <b>7.00</b>                |



5.1.1.A



5.1.1.B



5.1.2.A



5.1.3.A



5.1.4.A

| 5.2 for SWIMMING POOL HEAT PUMP installation |   | unit | Price EXW<br>w/o VAT /EUR/ |
|--|---|------|----------------------------|
| <b>5.2.1. Copper pipes</b>                   |   |      |                            |
| 5.2.1.A                                      | for HP1000 GREEN (On-Off) SPLIT<br>Insulated double copper pipes DUO 6+12<br>(1/4" + 1/2" x 0.8) - <b>25m package</b> /No. 2011/  | 1m   | <b>4.20</b>                |
| 5.2.1.B                                      | for HP1100 GREEN INVERTER Pro SPLIT<br>Insulated double copper pipes DUO 6+10<br>(1/4" + 3/8" x 0.8) - <b>25m package</b> /No. 2010/  | 1m   | <b>3.94</b>                |
| 5.2.1.C                                      | for HP1400 GREEN (On-Off), HP1500/1700/2100 GREEN<br>Inverter Pro SPLIT<br>Insulated double copper pipes DUO 10+16 (3/8" x 5/8") - <b>25m package</b><br>/No. 2012/   | 1m   | <b>7.25</b>                |
| 5.2.1.D                                      | for HP2300/2800 INVENTOR, HP2400/3000 PREMIUM, HP2700<br>GREEN INVERTER Pro SPLIT<br>Insulated copper pipes d10 (3/8" x 1.0)- <b>50m package</b> /No. 2003/<br>+ insulated copper pipes d18 (3/4" x 1.0)- <b>25m package</b> /No. 2007/ | 1m   | <b>8.60</b>                |
| 5.2.1.E                                      | for DRY SIREN<br>Insulated copper pipes d12 (1/2" x 1.0)- <b>50m package</b> /No. 2005/<br>+ insulated copper pipes d10 (3/8" x 1.0)- <b>50m package</b> /No. 2003/   | 1m   | <b>6.75</b>                |



|  |  |       |              |
|--|--|-------|--------------|
| <b>5.2.2. Insulation tape</b>          |  |       |              |
| 5.2.2.A                                | A self-adhesive insulation tape K-flex white<br>/No. 2016/   | 1 pc  | <b>11.30</b> |
| <b>5.2.3. Consoles and base blocks</b> |  |       |              |
| 5.2.3.A                                | Console White - 700 /No. 6004/   | 2 pcs | <b>32.00</b> |
| 5.2.3.B                                | Base installation block 450 – white, carrying capacity 200kg, 2pcs<br>/No. 6055/, with Side covers, 4 pcs /No. 6061/   | set   | <b>8.48</b>  |
| 5.2.3.C                                | Rubber base installation block 400 - black, carrying capacity 200kg,<br>2pcs /No. 6065/<br><b>Compatibility:</b> HP1000-1400 GREEN, HP1100-1500 GREEN INVERTER Pro | 1 pc  | <b>12.90</b> |
| 5.2.3.D                                | Rubber base installation block 600 - black, carrying capacity 200kg,<br>2pcs /No. 6066/<br><b>Compatibility:</b> HP1700-2100-2700 GREEN INVERTER Pro, HP2300-3000  | 1 pc  | <b>17.40</b> |
| 5.2.3.E                                | Antivibration silentblocks, 4pcs /No. 6023/  | set   | <b>15.90</b> |



5.2.2.A



5.2.3.A



5.2.3.B



5.2.3.C|D



5.2.3.E

/Price change reserved./

General discount does not apply on above stated prices. Stated prices are final.



v. 02/2021

MICROWELL

## 6. EQUIPMENT FOR INSTALLATION AND SERVICE

Price EXW  
w/o VAT /EUR/

### 6.1. Vacuum pump

**6.1.A** Vacuum pump Rothenberger ROAIRVAC 6,0 - 170l/min **325**

**6.1.B** Refco - ENVIRO DUO OS, recovery station with oil separation - 4687035, gas 33kg/h, liquid 210 kg/h, Push pull 570kg/h **1 140**

6.1.A



6.1.B



### 6.2. Charging and testing hoses Refco

**6.2.A** Premium with closure valve, length 90cm **50**

**6.2.B** Premium with closure valve, length 150cm **60**

6.2.A|B



### 6.3. Manifold valve Refco

**6.3.A** for refrigerant R410, R32 **95**

**6.3.B** for refrigerant R22, R407, R410 **85**

6.3.A



6.3.B



### 6.4. Eccentric flare tool

**6.4.A** Eccentric flare tool Rothenberger, with 1" flare matrix, 222402 **150**

**6.4.B** Eccentric flare tool REFCO, with 1" flare matrix in small suitcase, RF888Z **120**

**6.4.C** Eccentric flare tool REFCO, flare matrix and cutter in small suitcase, RF275FS **90**

**6.4.D** Flare tool Rothenberger with expanding - 1" packet **55**

6.4.A



6.4.B



6.4.C



6.4.D



### 6.5. Expanders

**6.5.A** Expander Rothenberger 3/8, 1/2, 5/8, 3/4, 22, 28 - 1" packet, 12320 **340**

6.5.A



### 6.6. Cutters

**6.6.A** Cutter Rothenberger MINIMAX 3 - 28mm, 70015 **25**

**6.6.B** Cutter Rothenberger TC 35, 6- 35mm, 70027 **30**

6.6.A



6.6.B



### 6.7. Tube benders

**6.7.A** Tube bender Rothenberger TBM 3/8, 1/2, 5/8, 3/4, 7/8, 23022X **225**

6.7.A



### 6.8. Charging scales

**6.8.A** Charging scale Rothenberger to 120kg - accuracy 2g, 173004 **275**

**6.8.B** Charging scales TST **170**

6.8.A



6.8.B



/Price and model change reserved./

## 7. WATER CONNECTION PACKET




for HEAT PUMP CONNECTION to pool water circuit

|              | /Price for the whole set/                                       | Price EXW<br>w/o VAT /EUR/ |
|--------------|---|----------------------------|
| <b>7. 1.</b> | <b>WATER CONNECTION PACKET for HP Premium, Inventor</b>         | <b>120.00</b>              |
| <b>7. 2.</b> | <b>WATER CONNECTION PACKET for HP Green, Green Inverter Pro</b> | <b>110.00</b>              |


1 Pressure hose d50, length 10m /No. 211055/

1



2 PVC tube d50, length 0.8m /No. 211061/

2



3 Tube holder, open, d50, 8pcs /No. 211050/

3



4 Hose nut / Swivel for glue d50 x external thread 1 1/2", 2pcs /No. 211049/

4



5 PVC tube knee 90° for glue, 8pcs /No. 211046/

5



6 Swivel with valve for glue d50, 3pcs /No. 211048/

6



7 PVC "T" piece 90° for glue d50, 2pcs /No. 211047/

7



8 Glue Tangit PVC-U, 250g /No. 211051/

8



9 Cleaner Tangit 125 ml /No. 211052/

9



10 Sealing fibre Tangit Uni-Lock, 1 package /No. 211054/

10



11 Teflon tape 12 mm/12 m /No. 211053/

11



12 Screw fasteners with screws, 8pcs, dimensions: 10x48mm /No. 206013/

12

13 Screw fasteners with screws, 8pcs, dimensions: 6x70mm /No. 206023/

13



14 Cardboard box, 800x600x600 mm /No. 210005/

14



/Price change reserved./

General discount does not apply on above stated prices.  
Stated prices are final.



**SMART PURCHASE**  
Buy the whole set.



/Picture is illustratory./



v. 02/2021

**MICROWELL**

## 8. SPARE PARTS


### 8.A.

### DEHUMIDIFIER SPARE PARTS

Price EXW  
w/o VAT /EUR/


#### Compressors and capacitors

|               |  |              |
|---------------|--|--------------|
| <b>103001</b> | Compressor DRY 300: including siphon, silentblocks, heat protection, cover, Daikin OEM | <b>305</b>   |
| <b>112003</b> | Compressor DRY 300: including siphon, silentblocks, heat protection, cover, LG         | <b>485</b>   |
| <b>103008</b> | Compressor DRY 500: including siphon, silentblocks, heat protection, cover, Daikin OEM | <b>415</b>   |
| <b>112004</b> | Compressor DRY 500: including siphon, silentblocks, heat protection, cover, LG         | <b>575</b>   |
| <b>103015</b> | Compressor DRY 800: including siphon, silentblocks, heat protection, cover             | <b>840</b>   |
| <b>103016</b> | Compressor DRY 1200: including siphon, silentblocks, heat protection, cover            | <b>1 065</b> |
| <b>103005</b> | Compressor capacitor DRY 300: 30µF 400/450V  | <b>8</b>     |
| <b>103324</b> | Compressor capacitor DRY 400: 40µF 400/450V  | <b>8</b>     |
| <b>103011</b> | Compressor capacitor DRY 500: 35µF 400/450V  | <b>8</b>     |
| <b>103017</b> | Compressor capacitor DRY 800: 45µF 400/450V  | <b>10</b>    |
| <b>103018</b> | Compressor capacitor DRY 1200: 50µF 400/450V   | <b>10</b>    |



#### Fans

|               |  |            |
|---------------|--|------------|
| <b>103002</b> | Fan for DRY 300-400-500-800-1200. DRY300-400 - 1pc/dehumidifier, DRY500-800-1200 2pcs/dehumidifier | <b>142</b> |
| <b>103009</b> | Fan for DUCT DRY 500-800-1200  | <b>175</b> |
| <b>103012</b> | Fan capacitor DUCT DRY 500-800-1200: 3.5µF 400/450V  | <b>10</b>  |
| <b>103057</b> | Fan switch PERIODICAL/CONTINUOUS   | <b>2</b>   |



#### Humidistats

|                 |   |            |
|-----------------|---|------------|
| <b>103022</b>   | Humidistat & Thermostat DIGITAL (FOX-2SHTR) BUILT-IN SILVER, METAL a DUCT | <b>126</b> |
| <b>103020</b>   | Mechanical built-in humidistat /rotary/ ALL DEHUMIDIFIER MODELS           | <b>29</b>  |
| <b>103021</b>   | Indication wheel for rotary humidistat / ALL DEHUMIDIFIER MODELS          | <b>2</b>   |
| <b>103026</b>   | Mechanical external rotary humidistat EBERLE HYG-6001                     | <b>80</b>  |
| <b>103028</b>   | Mechanical external rotary humidistat EBERLE HYG-7001                     | <b>85</b>  |
| <b>RHT-RX</b>   | Receiver for wireless humidistat & thermostat DRY EASY 300                | <b>70</b>  |
| <b>RHT-TX-2</b> | Transmitter for wireless humidistat & thermostat DRY EASY 300             | <b>215</b> |
| <b>RHT-ANT</b>  | Antenna for wireless humidistat & thermostat DRY EASY 300                 | <b>60</b>  |





## 8. SPARE PARTS

### 8.A.

#### DEHUMIDIFIER SPARE PARTS

Price EXW  
w/o VAT /EUR/

##### Valves and relays

|               |  |           |
|---------------|--|-----------|
| <b>103004</b> | LP valve - DRY 300/400                                   | <b>19</b> |
| <b>103010</b> | LP valve - DRY 500/800/1200                              | <b>19</b> |
| <b>103059</b> | Time relay JEL-111 - ALL DEHUMIDIFIER MODELS             | <b>35</b> |
| <b>103058</b> | Power relay SCHRACK - DRY 300/400/500/800/1200           | <b>18</b> |
| <b>103069</b> | Power relay OMRON DRY 800/1200                           | <b>15</b> |
| <b>108001</b> | Filling valve d6/100mm, SAE 1/4" ALL DEHUMIDIFIER MODELS | <b>3</b>  |
| <b>103019</b> | Antifreeze thermostat +15°C                              | <b>35</b> |



##### Capillaries

|               |                                 |             |
|---------------|---------------------------------|-------------|
| <b>108006</b> | Capillary DRY300, length: 1m    | <b>3.50</b> |
| <b>108016</b> | Capillary TEEX 2.0, DRY400      | <b>3.50</b> |
| <b>108006</b> | Capillary DRY500, length: 2.6 m | <b>8.50</b> |
| <b>112001</b> | Capillary DRY800                | <b>3.00</b> |
| <b>112002</b> | Capillary DRY1200               | <b>4.00</b> |



##### Refrigerant filters and air filters

|               |                                 |              |
|---------------|---------------------------------|--------------|
| <b>108015</b> | Refrigerant Filter DRY300       | <b>3.50</b>  |
| <b>108020</b> | Refrigerant Filter DRY400/500   | <b>3.50</b>  |
| <b>108022</b> | Refrigerant Filter DRY800/1200  | <b>13.50</b> |
| <b>F1</b>     | Air Filter DRY300/400 TTW, G3   | <b>5.00</b>  |
| <b>F2</b>     | Air Filter DRY500 TTW, G3       | <b>5.00</b>  |
| <b>F3</b>     | Air Filter DRY800/1200 TTW, G3  | <b>5.00</b>  |
| <b>F4</b>     | Air Filter DRY300/400 DUCT, G3  | <b>6.00</b>  |
| <b>F5</b>     | Air Filter DRY500 DUCT, G3      | <b>7.00</b>  |
| <b>F6</b>     | Air Filter DRY800/1200 DUCT, G3 | <b>9.00</b>  |



General discount does not apply on above stated prices.  
Stated prices are final.

## 8. SPARE PARTS

### 8.B.

### HEAT PUMP SPARE PARTS

Price EXW  
w/o VAT /EUR/

#### Flow switch

|               |  |           |
|---------------|--|-----------|
| <b>203005</b> | Flow switch HP1000-1100-1400-1500-1700-2300-2400-2800-3000 | <b>35</b> |
|---------------|--|-----------|

#### Exchangers

|                |                           |              |
|----------------|---------------------------|--------------|
| <b>204001</b>  | Exchanger Omega HP 1000   | <b>295</b>   |
| <b>204002</b>  | Exchanger Omega HP 1400   | <b>325</b>   |
| <b>HP18004</b> | Exchanger Premium HP 1100 | <b>590</b>   |
| <b>HP18005</b> | Exchanger Premium HP 1500 | <b>635</b>   |
| <b>204003</b>  | Exchanger Inventor HP2300 | <b>425</b>   |
| <b>204004</b>  | Exchanger Inventor HP2800 | <b>525</b>   |
| <b>HP18008</b> | Exchanger Premium HP 2400 | <b>1 050</b> |
| <b>HP18009</b> | Exchanger Premium HP 3000 | <b>1 190</b> |

#### Controllers


|                |   |            |
|----------------|---|------------|
| <b>HP18010</b> | Controller - complete set HP1000, 2000, 30000, SW-SRO193026, SRO1930027 | <b>199</b> |
| <b>203022</b>  | Controller - Transformer  | <b>20</b>  |
| <b>203008</b>  | Controller - Wall installation box                                      | <b>3</b>   |

#### Wi-Fi box

|               |   |           |
|---------------|---|-----------|
| <b>203028</b> | WIFI box SRO193028, 2x 1m connection cable, female and male connector | <b>30</b> |
|---------------|---|-----------|

#### Temperature sensors

|               |   |          |
|---------------|---|----------|
| <b>203011</b> | Temperature sensor T1, T2, T5 (water, evaporator) (k5Ω) | <b>3</b> |
| <b>203013</b> | Temperature sensor T3 (air, plastic) (k5Ω)              | <b>3</b> |
| <b>203012</b> | Temperature sensor T4 (compressor)(k50Ω)                | <b>3</b> |

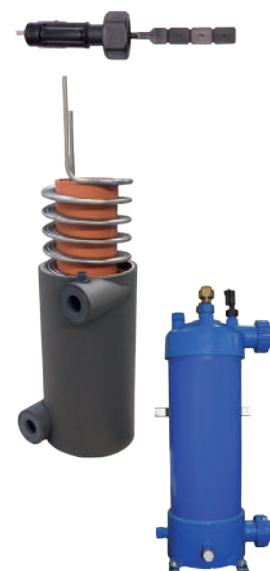

## 8. SPARE PARTS

### 8.B.

### HEAT PUMP SPARE PARTS

Price EXW  
w/o VAT /EUR/

#### Fan blades

|               |                                  |           |
|---------------|----------------------------------|-----------|
| <b>209045</b> | Fan blade HP 1000-1100-1400-1500 | <b>50</b> |
| <b>209035</b> | Fan blade HP 2300-2400-2800-3000 | <b>50</b> |

#### Compressors

|               |  |            |
|---------------|--|------------|
| <b>209083</b> | Compressor HP1000-1100, GMCC Rotary      | <b>550</b> |
| <b>209084</b> | Compressor HP1400-1500, GMCC Rotary      | <b>660</b> |
| <b>209090</b> | Compressor HP2300-2400, Panasonic Scroll | <b>790</b> |
| <b>209089</b> | Compressor HP2800-3000, Panasonic Scroll | <b>890</b> |

#### Others

|                |  |           |
|----------------|--|-----------|
| <b>209024</b>  | 4-way valve electrical coil + copper valve HP1000-1100-1400-1500 | <b>30</b> |
| <b>209034</b>  | 4-way valve electrical coil + copper valve HP2300-2400-2800-3000 | <b>30</b> |
| <b>HP18020</b> | Set of silentblocks (4pcs)                                       | <b>18</b> |
| <b>HP18021</b> | Condensate drain "L" part 90°                                    | <b>3</b>  |
| <b>209031</b>  | Phase monitor HP2000-3000  | <b>60</b> |



General discount does not apply on above stated prices.  
Stated prices are final.



## 8. SPARE PARTS

### 8.C.

#### HEAT PUMP SPARE PARTS for models HP GREEN

Price EXW  
w/o VAT /EUR/

##### for model HP 1100 GREEN Inverter

|               |  |            |
|---------------|--|------------|
| <b>209100</b> | PC board (Heat&Cool) for HP1100 GREEN Inverter                                 | <b>155</b> |
| <b>209102</b> | Round Touch controller (Heating&Cooling, with Wi-Fi) for HP1100 GREEN Inverter | <b>130</b> |
| <b>209104</b> | Inverter board (Heat&Cool) for HP1100 GREEN Inverter                           | <b>220</b> |
| <b>209106</b> | Water flow switch for HP1100 GREEN Inverter                                    | <b>35</b>  |
| <b>209108</b> | Fan motor for HP1100 GREEN Inverter  | <b>115</b> |
| <b>209110</b> | High pressure protection switch for HP1100 GREEN Inverter                      | <b>15</b>  |
| <b>209112</b> | Low pressure protection switch for HP1100 GREEN Inverter                       | <b>15</b>  |
| <b>209114</b> | Water union for HP1100 GREEN Inverter  | <b>20</b>  |
| <b>209116</b> | Water union gasket for HP1100 GREEN Inverter                                   | <b>5</b>   |

##### for model HP 1500 GREEN Inverter

|               |  |            |
|---------------|--|------------|
| <b>209101</b> | PC board (Heat&Cool) for HP1500 GREEN Inverter                                 | <b>155</b> |
| <b>209103</b> | Round Touch controller (Heating&Cooling, with Wi-Fi) for HP1500 GREEN Inverter | <b>130</b> |
| <b>209105</b> | Inverter board (Heat&Cool) for HP1500 GREEN Inverter                           | <b>220</b> |
| <b>209107</b> | Water flow switch for HP1500 GREEN Inverter                                    | <b>35</b>  |
| <b>209109</b> | Fan motor for HP1500 GREEN Inverter  | <b>115</b> |
| <b>209111</b> | High pressure protection switch for HP1500 GREEN Inverter                      | <b>15</b>  |
| <b>209113</b> | Low pressure protection switch for HP1500 GREEN Inverter                       | <b>15</b>  |
| <b>209115</b> | Water union for HP1500 GREEN Inverter  | <b>20</b>  |
| <b>209117</b> | Water union gasket for HP1500 GREEN Inverter                                   | <b>5</b>   |

##### for model HP 1000 GREEN On-Off

|               |   |            |
|---------------|---|------------|
| <b>209118</b> | PC board (Heat&Cool) for HP1000 GREEN       | <b>145</b> |
| <b>209120</b> | LCD controller (Heat&Cool) for HP1000 GREEN | <b>85</b>  |
| <b>209122</b> | Water flow switch for HP1000 GREEN          | <b>35</b>  |
| <b>209124</b> | Fan motor for HP1000 GREEN                  | <b>65</b>  |
| <b>209126</b> | Full set of sensors for HP1000 GREEN        | <b>8</b>   |
| <b>209128</b> | High & low pressure switch for HP1000 GREEN | <b>15</b>  |
| <b>209130</b> | Water union 500mm black for HP1000 GREEN    | <b>20</b>  |
| <b>209132</b> | Water union gasket for HP1000 GREEN         | <b>5</b>   |
| <b>209134</b> | Drainage kit for HP1000 GREEN               | <b>8</b>   |
| <b>209136</b> | Fan for HP1000 GREEN                        | <b>28</b>  |

##### for model HP 1400 GREEN On-Off

|               |   |            |
|---------------|---|------------|
| <b>209119</b> | PC board (Heat&Cool) for HP1400 GREEN       | <b>145</b> |
| <b>209121</b> | LCD controller (Heat&Cool) for HP1400 GREEN | <b>85</b>  |
| <b>209123</b> | Water flow switch for HP1400 GREEN          | <b>35</b>  |
| <b>209125</b> | Fan motor for HP1400 GREEN                  | <b>65</b>  |
| <b>209127</b> | Full set of sensors for HP1400 GREEN        | <b>8</b>   |
| <b>209129</b> | High & low pressure switch for HP1400 GREEN | <b>15</b>  |
| <b>209131</b> | Water union 500mm black for HP1400 GREEN    | <b>20</b>  |
| <b>209133</b> | Water union gasket for HP1400 GREEN         | <b>5</b>   |
| <b>209135</b> | Drainage kit for HP1400 GREEN               | <b>8</b>   |
| <b>209137</b> | Fan for HP1400 GREEN                        | <b>28</b>  |



## 9. WATER SURFACE COVER

A swimming pool cover reduces the actual evaporation by 30-50%. This means that you need a smaller dehumidifier for a given pool, you will save on energy bill since smaller unit consumes less electricity and also you will reduce heat losses of your water, thus you will need smaller heating device (heat pump) and also it will consume less energy compared to pool without cover.

Blue bubble plastic cover is a perfect solution for a domestic or hotel pool.



### 9.1 POOL COVER ROLLER

Price EXW

w/o VAT /EUR/

#### 9.1.1. Pool cover roller - FIXED POSITION

**9.1.1.A** with telescopic tube length 2.7 - 4.4m **188**

**9.1.1.B** with telescopic tube length 3.7m - 5.4m **208**

**9.1.1.C** with telescopic tube length 4.1m - 5.7m **185**

**9.1.1.D** with telescopic tube length 5.3m - 6.9m **210**

#### 9.1.2. Pool cover roller - MOBILE

**9.1.2.A** with telescopic tube length 2.7 - 4.4m **200**

**9.1.2.B** with telescopic tube length 3.7m - 5.4m **218**

#### 9.1.3. Pool cover roller - SIDEWISE MOBILE

**9.1.3.A** with telescopic tube length 2.7 - 4.4m **250**

**9.1.3.B** with telescopic tube length 3.7 - 5.4m **275**

#### 9.1.4. Pool cover roller - STANDING

**9.1.4.A** with telescopic tube length 2.7 - 4.4m **190**

**9.1.4.B** with telescopic tube length 3.7m - 5.4m **205**

#### 9.1.5. Pool cover roller - FIXED ON THE WALL

**9.1.5.A** with telescopic tube length 2.6 - 4.3m **280**



### 9.2 BLUE BUBBLE PLASTIC SHEET

Price EXW

w/o VAT /EUR/


400 micr., 50m reel up, Light blue Geo Bubble material /m/

**9.2.A** width 3m **16.50**

**9.2.B** width 3.5m **19.50**

**9.2.C** width 4m **22.50**

**9.2.D** width 5m **27.50**



General discount does not apply on above stated prices. Stated prices are final.



# 10. VENTILATION

up to  
**300 m<sup>3</sup>/h**

**FREE**  
heated

## Fan scheme



**Price EXW**  
w/o VAT /EUR/

## 10.1. EXHAUST ventilation set

### 10.1.A Ventilation set A: Air flow: 100m<sup>3</sup>/h, Ø 100mm

Includes:

- Small axial extract fan DECOR 100
- Backdraft shutters RSK 100 ED
- Plastic external louvre LG100
- Plastic circular hose UK-PP 100/1000

**100**



### 10.1.B Ventilation set B: Air flow: 300m<sup>3</sup>/h, Ø 150mm

Includes:

- Small axial extract fan DECOR 300 SZ IPX4
- Backdraft shutters RSK 150 ED
- Plastic external louvre LG 150
- Plastic circular hose UK-PP 150/1000

**150**

**Price EXW**  
w/o VAT /EUR/

## 10.2. FRESH AIR ventilation set

### 10.2.A FRESH AIR ventilation set A: with Fixed plastic external louvre

- Air flow: 100-300m<sup>3</sup>/h, Ø 100mm
- white color - RAL 9010
- Includes: Plastic circular hose LG100, Plastic circular hose UK-PP 100/1000

**40**



10.2.A

### 10.2.B FRESH AIR ventilation set B: with Electric plastic back draft louvre shutter


- Air flow: 100-300m<sup>3</sup>/h, Ø 100mm
- grey color - RAL 7035
- Includes: External electric louvre PAR 160 RAL7035, Plastic circular hose UK-PP 100/1000

**350**



10.2.B

## Installation scheme

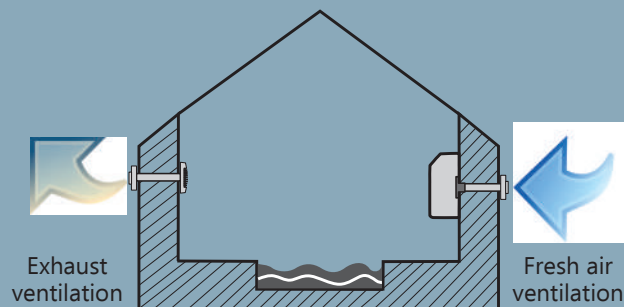

Bring fresh air into  
your pool  
and warm it with  
the dehumidifier.



## Our Innovation: **FRESH AIR SUPPLY**

Each Microwell dehumidifier has fresh air supply possibility. The air inlet is located under the condenser, that way the incoming fresh air is effectively heated at no cost thanks to heat recovery.



*Fresh air metal extension for connection to dehumidifier*



*Plastic circular hose*



*Plastic external louver*

Compatibility to All DRY range.



## ADDITIONAL VENTILATION

Saving energy,  
time & money



**MICROWELL, spol. s r.o.**

SNP 2018/42, 927 01 Šal'a, SLOVAKIA  
p (+421) 31/770 7082  
m (+421) 911/413 990  
e export@microwell.sk

[www.microwell.eu](http://www.microwell.eu)



**Branch office PRAHA**

Hlavní 1195  
251 68 Hlubočinka - Sulice, CZ  
m (+420) 773 621 599  
m (+420) 608 855 364  
e praha@microwell.cz  
www.microwell.cz

**Branch office BRNO**

Bohunická 81  
619 00 Brno, CZ  
p (+420) 549 257 241  
m (+420) 608 855 364  
e brno@microwell.cz  
www.microwell.cz

**Branch office OSTRAVA**

Slévárenská 411/12  
709 00 Ostrava, CZ  
p (+420) 596 638 227  
m (+420) 608 855 364  
e ostrava@microwell.cz  
www.microwell.cz

**Branch office BUDAPEST**

Attila út 4.  
1013 Budapest, HU  
m (+36) 30 875 58 51  
e microwell@microwell.hu  
www.microwell.hu

*Manufacturer reserves the right to change the technical and visual parameters without notice.*

Valid from: JUNE 16, 2021