

# PRICE LIST 2022

VERSION  
**02/2022**  
update in page/s/  
53, 62

Swimming pool HEATING & DEHUMIDIFICATION solutions  
UV Air Disinfection systems



European manufacturer of swimming pool dehumidifiers, heat pumps and germicidal air purifiers.

# WHY MICROWELL?

VARIETY OF MODELS  
 WIDEST RANGE OF DESIGN AND ACCESSORIES  
 EXCELLENT CRAFTSMANSHIP AND EXPERIENCE  
 INNOVATIVE ENGINEERING, CUTTING EDGE ROBOTICS  
 EUROPEAN QUALITY, LOCATED IN SLOVAKIA  
 750+ PARTNERS IN 35+ COUNTRIES  
 COMPETITIVE PRICES  
 ACCREDITED BY ISO 9001, ISO 14001, ISO 45001



## Dear Business Partners,

First of all, let me thank you for your loyalty to the MICROWELL brand and for last year's excellent performance, that moved us 32% higher in sales compared to 2020. Such an increase in production is a very strong feedback for each manufacturer, letting them know that the goals that they have set are real and the way of achieving them is right.

At the same time, last year was also marked by the global pandemic COVID 19, the threat of different new mutations of a deadly virus and to top it all off, an "economic virus" in the form of inflation has also come on the scene in the second half of 2021. Trust me, it is much harder to fight with this "virus" than with COVID 19. Mitigation of inflation impacts is only possible by increasing production efficiency. And that is exactly our primary goal in 2022. The price of energy, practically all components, chips, etc. has risen in double digits. When browsing this price list, you will certainly quickly notice that our product prices have increased by only a single digit number compared to 2021, due to our increased production efficiency.

And a few words about our news. As for our DRY dehumidifiers, I am happy to announce the rebirth of the SIREN product line. We omitted SMART technology, which had unnecessary communication problems due to the server, and focused on the reliable and trouble-free operation of the device while maintaining all its progressiveness. Our DRY 800/1200 units have been given a wonderful "coat" to shine in any swimming pool hall. In addition,


these machines weight considerably less and their assembly is much easier.

The Black Inverter line is an absolute novelty in the field of heat pumps. According to our surveys, it will be a hit of this year.

And finally, we announce our novelty in the fight against COVID 19 pandemic. A bigger, more powerful brother of last year's ATHMOSS named ATHMOSSPHERE, that is hidden in a SIREN dress and is also mounted on the ceiling. It has a built-in sound processor and communicates with the operator in all possible languages.

Dear friends, I wish you a frequent browsing of this price list and finding the most suitable products for your successful future applications.

Ing. Tibor Kovács, CEO

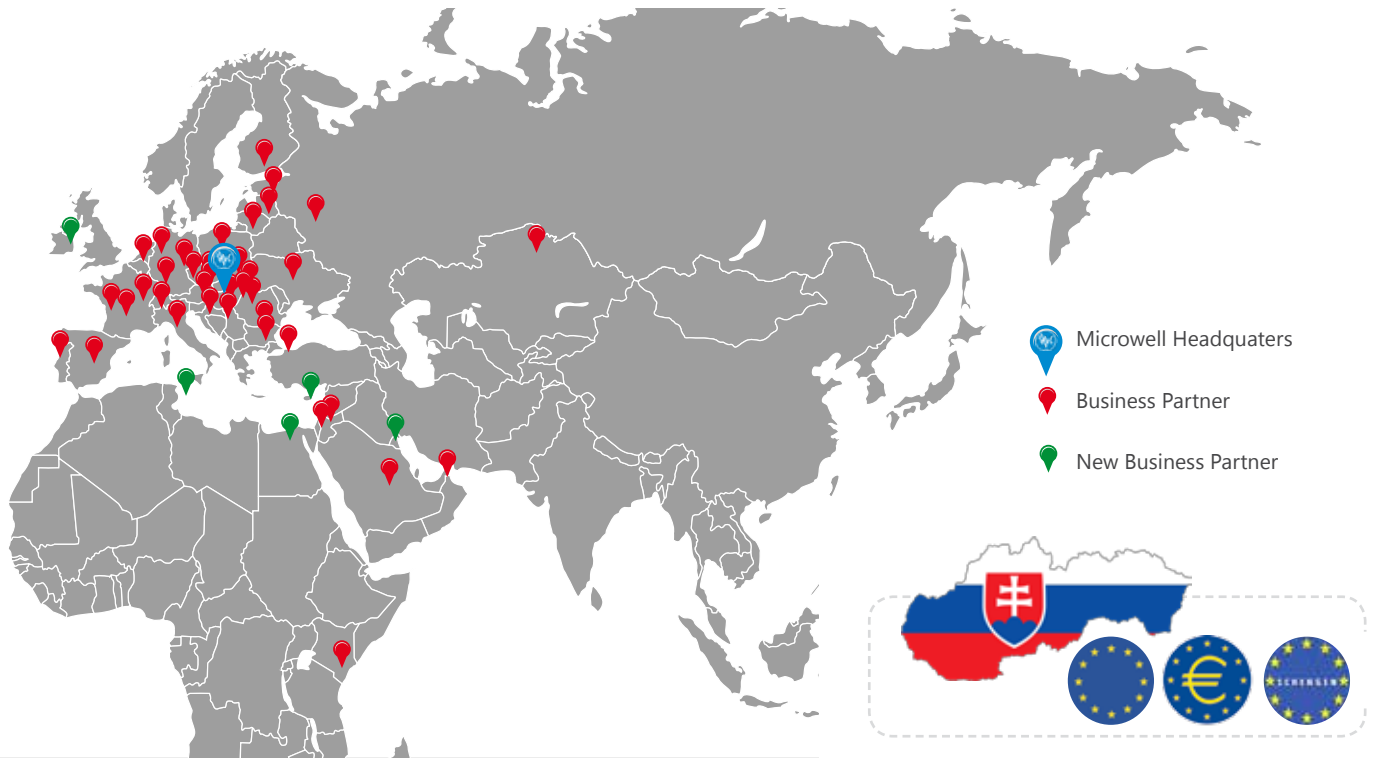

**MICROWELL Headquarters**



Microwell operates in 3 business divisions /Dehumidification, Heating and UV Air Disinfection Solutions, Measurement and Control, Air conditioning and Ventilation/, employs 70 employees in 5 Branch offices in 3 countries: Slovakia, Czech republic, Hungary/. The company has own manufacturing facilities, warehouse, R&D department.



The core strength of Dehumidification, Heating and UV Air Disinfection Solutions Division is its R&D team, that works hard, permanently focused on customers needs, to find new solutions and innovations, e.g. DRY SIREN Eco with sophisticated engineering, outstanding quality a craftsmanship. They developed the fully new product - ATHMOSS Germicidal Air Purifier, closed germicidal air disinfecter, equipped with a HEPA filter during worldwide COVID pandemic. In 2021 Microwell extended the germicidal air disinfecters production line with excellent Ceiling model - ATHMOSSphere.



**Production & warehouse**

Primary manufacturing facility located in 3.000m<sup>2</sup> venue. Office extends over 1.260m<sup>2</sup>.





# Germicidal Air Purifiers Pages 6 - 9

## ATHMOSS germicidal air purifier

ATHMOSS 120 OFFICE  
ATHMOSS 120 INDUSTRY  
ATHMOSSphere



# Dehumidifiers Pages 10 - 29

## SWIMMING POOL DEHUMIDIFIERS on the wall, on the floor, behind the wall

DRY 300 WAVE		
DRY 300 METAL		
DRY 300 SILVER	30m <sup>2</sup> /36l	12-13
DRY 400 WAVE		
DRY 400 METAL		
DRY 400 SILVER	45m <sup>2</sup> /48l	14-15
DRY 500 WAVE		
DRY 500 METAL		
DRY 500 SILVER	60m <sup>2</sup> /66l	16-17
DRY 800 WAVE		18
DRY 1200 WAVE	90-120m <sup>2</sup> /90-120l	19
DRY 800 METAL		19
DRY 1200 METAL		
DRY SALT+ SULPHUR+		20

## SWIMMING POOL DEHUMIDIFIERS ducted

DRY 300 DUCT		
DRY 400 DUCT		
DRY 500 DUCT		
DRY 800 DUCT		
DRY 1200 DUCT		22-25

## SWIMMING POOL DEHUMIDIFIERS ceiling mounted

SIREN ECO MONO	60-120m <sup>2</sup> /67-134l	26-27
SIREN ECO DUE		

## DEHUMIDIFIERS FOR GALLERIES

DRY GALLERY		28
-------------	--	----

## DEHUMIDIFIERS FOR INDUSTRY

T40   T90   T120		
TE40   TE90   TE120		29



# Heat pumps Pages 30 - 47

## SWIMMING POOL HEAT PUMPS ON/OFF /up to 120 m<sup>3</sup>/

HP 1000 GREEN	9.2kW/45m <sup>3</sup>	32
HP 1400 GREEN	12.3kW/55m <sup>3</sup>	32
HP 1700 GREEN	16.2kW/70m <sup>3</sup>	33
HP 2300 INVENTOR		
HP 2800 INVENTOR	23-28kW/80-120m <sup>3</sup>	34-35

## SWIMMING POOL HEAT PUMPS SEASONAL INVERTER /up to 50 m<sup>3</sup>/

HP 900 BLACK	9kW/30m <sup>3</sup>	36
HP 1100 BLACK	11.5kW/35m <sup>3</sup>	36
HP 1500 BLACK	15kW/50m <sup>3</sup>	37

## SWIMMING POOL HEAT PUMPS FULL YEAR INVERTER /up to 135 m<sup>3</sup>/

HP 1100 GREEN Inverter Pro	10kW/40m <sup>3</sup>	38
HP 1500 GREEN Inverter Pro	15kW/60m <sup>3</sup>	39
HP 1700 GREEN Inverter Pro	17kW/95m <sup>3</sup>	40
HP 2100 GREEN Inverter Pro	24kW/105m <sup>3</sup>	41
HP 2700 GREEN Inverter Pro	31kW/135m <sup>3</sup>	42

## SWIMMING POOL HEAT PUMPS FULL YEAR PREMIUM /up to 120 m<sup>3</sup>/

HP 2400 PREMIUM	24kW/80m <sup>3</sup>	
HP 3000 PREMIUM	30kW/120m <sup>3</sup>	44-45

## COMMERCIAL SWIMMING POOL HEAT PUMPS INVERTER /up to 520 m<sup>3</sup>/

iMax 60		
iMax 110	60-115kW/260-520m <sup>3</sup>	46



# Accessories & Spare parts Pages 48 - 63

QMAX-HEAT PUMP TESTER		49
HUMIDITY VISUALIZATION microLIGHT+		51
INSTALLATION MATERIAL AND EQUIPMENT FOR INSTALLATION AND SERVICE		53
WATER SURFACE COVER		61
VENTILATION		62

NEW IN 2022



**ATHMOSSphere**  
fights against viruses.

This **ceiling germicidal air purifier** is designed for highly efficient, homogeneous air disinfection and virus elimination **in large rooms**.

It is suitable for a university auditorium, meeting room, conference room, specially developed for school classes and kindergarten classes. After 1 hour of operation of the ATHMOSSphere air purifier, the room gets rid of viruses and other unwanted microorganisms to 98,7% (measured in a room with a size of 126m<sup>3</sup>.) More on **pages 9**.



NEW IN 2022

### DRY 800 / 1200 WAVE

In 2022 we are re-adding to the production portfolio of swimming pool dehumidifiers the new models for bigger pools. DRY 800 WAVE and DRY 1200 WAVE stand out for their design and light weight.

Extraction rate: 80 ~ 240 l/h

More on **page 18**.



### SMART HEAT PUMP FOR SEASONAL USE



**MICROWELL HP BLACK Inverter** is a cost-effective choice for constant and reliable pool water temperature for heating/cooling.

It is suitable for residence pool **to 70m<sup>3</sup> of pool surface**.

HP BLACK Inverter combines eco-friendly R32 refrigerant, full DC Inverter technology and good price. It is right choice for home, seasonal use with the best energy saving.

Full model line read on **pages 34-35**.

### HP BLACK INVERTER



# ATHMOSS ATHMOSSphere

*The essential presence of the future.*



## Germicidal air purifiers

For offices, waiting rooms, retirement  
houses, event, fitness and shopping  
centers.

For industry premises, production halls.

**Professional, powerful  
Air purifier & Disinfectant  
safe to use at presence of people**

Destroys viruses, bacteria and other  
microorganisms in the air.

The ATHMOSS germicidal air purifier will  
create a safe and healthy environment  
in your office, production hall or doctor's  
waiting room.



Series	ATHMOSS 120	ATHMOSS 120	ATHMOSSphere
Model	OFFICE	INDUSTRY	
Installation	wall mounted/on the floor with mobile stand		ceiling mounted
Recommended size of disinfected area	15-450 m <sup>3</sup>	25-600 m <sup>3</sup>	100-1000 m <sup>3</sup>
Dimensions /WxHxD/	770 x 660 x 260 mm		Ø 1210 x 278 mm
Weight	20.5 kg	21.5 kg	
Cover	Acrylic, white		Acrylic, white
Noise level	33.5 dB(A) MIN 45.8 dB(A) MAX	39.1 dB(A) MIN 58.2 dB(A) MAX	34 dB(A) MIN 62 dB(A) MAX
Air flow	50-495 m <sup>3</sup> /h, adjustable	50-700 m <sup>3</sup> /h, adjustable	400-800 m <sup>3</sup> /h, adjustable
Power supply	230V AC/50Hz/1ph		230V AC/50Hz/1ph
Consumption	95-100-152 W	188-237 W	270-380 W
Number and performance of UV-C tubes	6 x 15 W /253.7 nm UV-C/		12 x 15 W /253.7 nm UV-C/
Operating life-time of UV-C tubes	<9000h		<9000h
Prefilter	Class G3 >10µm		Class G3 >10µm
HEPA filter	Class H11 >0.3µm, 95%		Class H11 >0.3µm, 95%



Manufacturer notice: Manufacturer reserves the right to change the technical parameters without notice.

## Tested and confirmed by the Institute of Clinical Microbiology, Faculty of Medicine UK in Hradec Králové, Czech Republic.



Effect of the air purifier ATHMOSS INDUSTRY 120 on artificial contaminated laboratory air pollution of bacteria - 47m<sup>3</sup>

Effect of the air purifier ATHMOSSphere on artificial contaminated laboratory air pollution of bacteria - 126m<sup>3</sup>

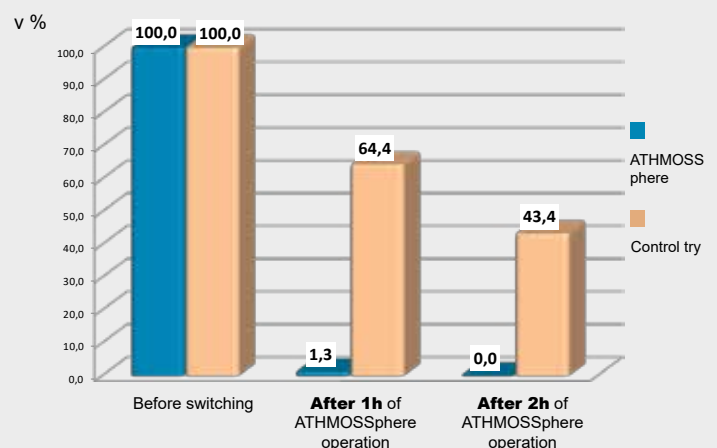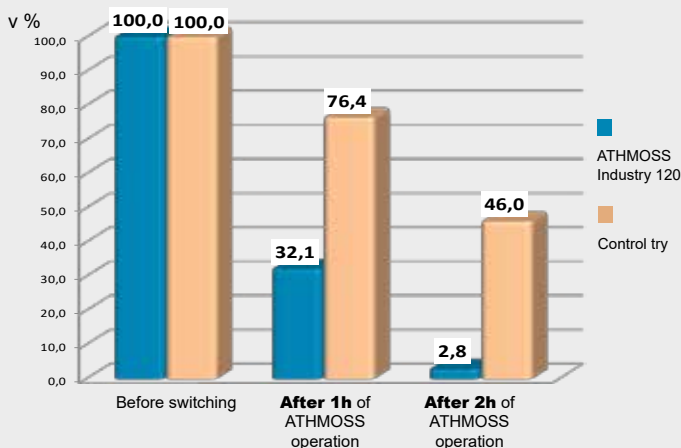

90W  
495 m<sup>3</sup>**ATHMOSS 120 OFFICE***Quiet, yet effective.*90W  
700 m<sup>3</sup>**ATHMOSS 120 INDUSTRY***Powerful without compromise.*

Cover	Acrylic, white	
UV-C tubes	6x15W /253,7 nm/	
Air flow	50-495 m <sup>3</sup> /h	50-700 m <sup>3</sup> /h
Prefilter	Class G3 >10 µm	
HEPA filter	Class H11 >0,3 µm, 95%	
microMETAL+ stainless steel filter		
Installation	Wall mounted	

ATHMOSS **ATHMOSS 120 O** - **1.****ATHMOSS 120 I** - **1.**

Basic equipment:	Model:	Price EXW Sala, SK w/o VAT
Germicidal air purifier, wall console, 90W UV-C <9.000hrs, G3 prefilter, H11 95% HEPA filter, microMETAL+ stainless steel filter, user's manual	<b>ATHMOSS 120 OFFICE</b>	<b>1 980 €</b>
	<b>ATHMOSS 120 INDUSTRY</b>	<b>2 150 €</b>

**1. Installation:**

<b>S</b> Standard: on the wall	<b>0 €</b>
<b>M</b> Mobile stand (vertically adjustable 145-185cm), RAL9010 white, 4 wheels (2 lockable): <i>/Rebate does not apply on this item. This is the actual purchase price./</i>	<b>115 €</b>
<b>P</b> Through-the-wall installation (Fiberglass cover with through-the-wall ducts set and removable aluminium grills, metal duct galvanized, wall thickness >400mm, insulated)	<b>385 €</b>

**1-M**

Spare parts:	Price EXW Sala, SK w/o VAT
Spare Disinfection chamber with 90W UV-C, with microMETAL+ stainless steel filter and HEPA filter H11	<b>760 €</b>
HEPA filter H11, 1pc, >0.3µm, 95% <i>/Rebate does not apply on this item. This is the actual purchase price./</i>	<b>15 €</b>
Pre-filter class G3, package of 3pcs, >10µm <i>/Rebate does not apply on this item. This is the actual purchase price./</i>	<b>9 €</b>

**1-P**

EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



180W  
495 m<sup>3</sup>

# ATHMOSSphere


The essential presence of the future.

# ATHMOSSphere

Cover	Acrylic, white
UV-C tubes	12x15W /253,7 nm/
Air flow	400-800 m <sup>3</sup> /h adjustable
Prefilter	Class G3 >10 µm
HEPA filter	Class H11 >0,3 µm, 95%
microMETAL+ stainless steel filter	
Installation	Ceiling mounted



278 mm

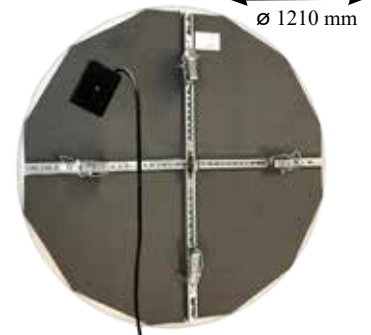

Ø 1210 mm



## ATHMOSSphere

**Basic equipment:** Price EXW Sala, SK w/o VAT

Ceiling germicidal air purifier, 180W UV-C <9.000hrs, G3 prefilter, H11 95% HEPA filter, microMETAL+ stainless steel filter, ceiling lifting mechanism, user's manual

**3 150 €**

**Spare parts:** Price EXW Sala, SK w/o VAT

Spare Disinfection chamber with 180W UV-C, with microMETAL+ stainless steel filter and HEPA filter H11

**1 250 €**

HEPA filter H11, 1pc, >0.3µm, 95%  
*/Rebate does not apply on this item. This is the actual purchase price./*

**15 €**

Pre-filter class G3, package of 3pcs, >10µm  
*/Rebate does not apply on this item. This is the actual purchase price./*

**9 €**



EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



v. 02/2022

MICROWELL



# Dehumidifiers


























For swimming pools, hotel pools, spa and jacuzzi  
For galleries, museums and libraries  
For industry

## Swimming pool humidity under the control

Microwell dehumidifiers solve humidity problems and maintain healthy pool environment by removing condensation and wet wall odour, and providing free heating through heat recovery.

Working on the principle of condensation, DRY swimming pool dehumidifiers are removing humid air from swimming pool hall, replacing it with dry and warm air.

# MICROWELL DRY Line 2022


		Pool surface	Extraction rate	Extraction rate	Air flow	Noise level (at 1m distance)	Power consumption	Heating output	Dimensions	Weight
Model		m <sup>3</sup>	l/24hrs /60% RH, 30°C/	l/24hrs /80% RH, 30°C/	m <sup>3</sup> /h	dB(A)	W	W	netto	netto
									mm	kg
Economy class - WAVE	 <b>DRY 300 WAVE</b>	30	36	48	550	42	700	1900	780 x 660 x 255	40
	 <b>DRY 400 WAVE</b>	45	48	58	600	42	700	1900	780 x 660 x 255	40
	 <b>DRY 500 WAVE</b>	60	66	101	800	44	1000	3500	1245 x 660 x 255	60
	 <b>DRY 800 WAVE</b>	90	90	136	1100	46	1600	5100	1250 x 950 x 310	80
	 <b>DRY 1200 WAVE</b>	120	120	181	1200	46	2150	5250	1250 x 950 x 310	82
Premium class - METAL	 <b>DRY 300 METAL</b>	30	36	48	550	42	700	1900	780 x 642 x 300	50
	 <b>DRY 400 METAL</b>	45	48	58	600	42	700	1900	780 x 642 x 300	50
	 <b>DRY 500 METAL</b>	60	66	101	800	44	1000	3500	1245 x 642 x 300	77
	 <b>DRY 800 METAL</b>	90	90	136	1100	46	1600	5100	1250 x 950 x 310	100
	 <b>DRY 1200 METAL</b>	120	120	181	1200	46	2150	5250	1250 x 950 x 310	101
LUXURY class - SILVER	 <b>DRY 300 SILVER</b>	30	36	48	550	42	700	1900	780 x 642 x 300	50
	 <b>DRY 400 SILVER</b>	45	48	58	600	42	700	1900	780 x 642 x 300	50
	 <b>DRY 500 SILVER</b>	60	66	101	800	44	1000	3500	1245 x 642 x 300	77
Through-the-wall	 <b>DRY 300 TTW</b>	30	36	48	550	42	700	1900	880 x 658 x 240	56
	 <b>DRY 400 TTW</b>	45	48	58	600	42	700	1900	880 x 658 x 240	56
	 <b>DRY 500 TTW</b>	60	66	101	800	44	1000	3500	1245 x 660 x 255	60
	 <b>DRY 800 TTW</b>	90	90	136	1100	46	1600	5100	1247 x 950 x 300	100
	 <b>DRY 1200 TTW</b>	120	120	181	1200	46	2150	5250	1247 x 950 x 300	103
Ducted	 <b>DRY 300 DUCT</b>	30	32	43	500/200Pa	54	800	1900	880 x 658 x 240	56
	 <b>DRY 400 DUCT</b>	40	43	56	500/200Pa	54	800	1900	880 x 658 x 240	56
	 <b>DRY 500 DUCT</b>	50	52	68	1000/200Pa	56	1150	3500	1250 x 660 x 250	78
	 <b>DRY 800 DUCT</b>	80	88	135	1100/170Pa	58	1700	5100	1247 x 950 x 300	102
	 <b>DRY 1200 DUCT</b>	110	112	170	1200/145Pa	60	2250	5250	1247 x 950 x 300	103
Ceiling	 <b>SIREN Eco MONO</b>	60	67	104	1000	35	1000	4500	Ø 1210 x 278	53+20
	 <b>SIREN Eco DUE</b>	120	134	208	2000	35	2300	8750	2x Ø 1210x 278	2x53+30

The manufacturer reserves the right to change the parameters without notice.

**36 l**  
**30 m<sup>2</sup>**

## DRY 300 WAVE

Cover	Extraction rate (30°C/60% RH - 35°C/95% RH)	Air flow
plastic (acryl)	36-63 l/24hrs	550 m <sup>3</sup> /hour

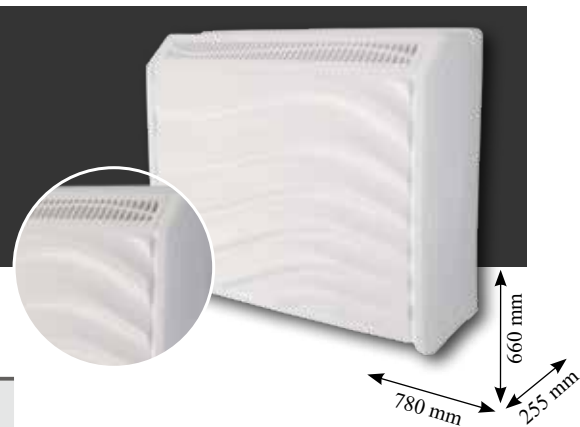

### DRY 300W - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8.

#### Basic equipment:

**Price EXW**  
w/o VAT /EUR/

Dehumidifier, wall console, user's manual, installation layout, fixation screws

micro COMPRESSOR+ ultra QUIET+ easy INSTALL+



**2 495**

#### 1. Installation:

<b>S</b> standard: on the wall	0
<b>M</b> mobile stand, 4 wheels, white color (RAL 9010), 230V EURO plug, 2m	235
<b>F</b> fixed floor stand, color: black RAL9005, 230V EURO plug, 2m	260
<b>P</b> through-the-wall INDOOR INSTALLATION (fiberglass cover with TTW ducts set and removable aluminum grills, metal ducts galvanized, insulated)	495
<b>T Premium</b> through-the-wall INDOOR INSTALLATION (metal powder coated cover, wall ducts, removable grills, metal ducts galvanized, insulated)	1 290
<b>E</b> through-the-wall OUTDOOR INSTALLATION (40mm TTW external aluminum and rubber insulation, winter module, condensate tray defrost, -15°C)	1 050

#### 2. Control:

<b>S</b> standard: built-in mechanical humidistat	0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat	345
<b>W6</b> remote wired humidistat EBERLE HYG6001+built-in mechanical humidistat	119
<b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat	129

#### 3. Air temperature:

<b>S</b> standard: +22°C...+35°C	0
<b>T</b> +15°C...+35°C (with antifreeze thermostat)	57
<b>V</b> +22°C...+42°C (with thermostatic expansion valve)	259
<b>A</b> +15°C...+42°C (T+V)	279
<b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)	385

#### 4. Air heating:

<b>S</b> standard: without LPHW (Low Pressure Hot Water)	0
<b>H</b> LPHW, 3.5 kW, without regulation, contact for external thermostat 230V/5A	228
<b>V</b> LPHW, 3.5 kW, with solenoid valve (in standard version – external contact 230V/5A) (with EASY 300 – fully automatic regulation + no current contact)	442
<b>E</b> Electrical heating 2 kW	486

#### 5. LPHW connection:

<b>S</b> standard: N/A (without LPHW)	0
<b>B</b> from the back	0
<b>R</b> from right	0
<b>L</b> from left	0

#### 6. micro LIGHT+





<b>S</b> standard: without Pool Security microLIGHT+	0
<b>L</b> Pool Security microLIGHT+	147

#### 7. Air filter:

<b>S</b> standard: without air filter	0
<b>F</b> Air filter (for model with wall or mobile stand installation: 1-S/M option)	52
<b>C</b> Air filter grid (for model with TTW installation: 1-P/E option)	52

#### 8. Fresh air supply:

<b>S</b> standard: without fresh air supply	0
<b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized	35

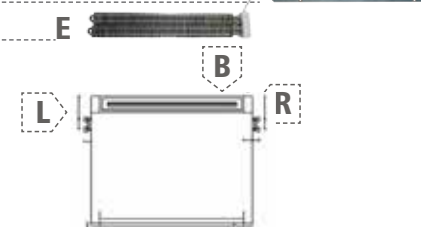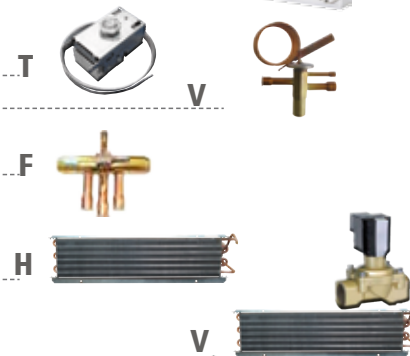

EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

36 l  
30 m<sup>2</sup>

# DRY 300 METAL | DRY 300 SILVER

Cover	Cover	Extraction rate (30°C/60% RH - 35°C/95% RH)	Air flow
DRY 300 METAL	DRY 300 SILVER		
metal	stainless steel	36-63 l/24hrs	550 m <sup>3</sup> /hour



DRY 300M



DRY 300S

642 mm  
780 mm  
300 mm



DRY 300M - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.

DRY 300S - - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.

Basic equipment:	Model:	Price EXW w/o VAT /EUR/
Dehumidifier, wall console, user's manual installation layout, fixation screws	<b>DRY 300 METAL</b>	<b>2 990</b>
<b>micro COMPRESSOR+</b> <b>ultra QUIET+</b> <b>easy INSTALL+</b> <b>FREE 3 YEARS WARRANTY</b>	<b>DRY 300 SILVER</b>	<b>3 480</b>
<b>1. Color options:</b>		
<b>S</b> standard: silver color „Tiger“		0
<b>W</b> white (RAL9010) glossy		0
<b>C</b> color selection according to your preference (RAL code)		price on demand
<b>2. Installation:</b>		
<b>S</b> standard: on the wall		0
<b>M</b> mobile stand, 4 wheels, color: silver 'Tiger', white (RAL 9010), 230V EURO plug, 2m		235
<b>F</b> fixed floor stand, color: black RAL9005, 230V EURO plug, 2m		260
<b>3. Control:</b>		
<b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat		0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)		345
<b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)		79
<b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat (without built-in digital humidistat & thermostat)		88
<b>4. Air temperature:</b>		
<b>S</b> standard: +22°C...+35°C		0
<b>T</b> +15°C...+35°C (with antifreeze thermostat)		57
<b>V</b> +22°C...+42°C (with thermostatic expansion valve)		259
<b>A</b> +15°C...+42°C (T+V)		279
<b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)		385
<b>5. Air heating:</b>		
<b>S</b> standard: without LPHW (Low Pressure Hot Water)		0
<b>H</b> LPHW, 3.5 kW, without regulation (external no current contact)		228
<b>V</b> LPHW, 3.5 kW, fully automatic regulation (with solenoid valve + external no current contact)		442
<b>E</b> Electrical heating 2 kW		486
<b>6. LPHW connection:</b>		
<b>S</b> standard: N/A (without LPHW)		0
<b>B</b> from the back		0
<b>R</b> from right		0
<b>L</b> from left		0
<b>7. micro LIGHT+</b>		
<b>S</b> standard: without Pool Security microLIGHT+		0
<b>L</b> Pool Security microLIGHT+		147
<b>8. Air filter:</b>		
<b>S</b> standard: without air filter		0
<b>F</b> Air filter		52
<b>9. Fresh air supply:</b>		
<b>S</b> standard: without fresh air supply		0
<b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized		35



EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



v. 02/2022



48 l  
45 m<sup>2</sup>

## DRY 400 WAVE

Cover	Extraction rate (30°C/60% RH ~ 35°C/95% RH)	Air flow
plastic (acryl)	48-78 l/24hrs	600 m <sup>3</sup> /hour



### DRY 400W - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8.

#### Basic equipment:

Price EXW  
w/o VAT /EUR/

Dehumidifier, wall console, user's manual, installation layout, fixation screws

micro COMPRESSOR+ ultra QUIET+ easy INSTALL+



2 890

#### 1. Installation:

<b>S</b> standard: on the wall	0
<b>M</b> mobile stand, 4 wheels, white color (RAL 9010), 230V EURO plug, 2m	235
<b>F</b> fixed floor stand, color: black RAL9005, 230V EURO plug, 2m	260
<b>P</b> through-the-wall INDOOR INSTALLATION (fiberglass cover with TTW ducts set and removable aluminum grills, metal ducts galvanized, insulated)	495
<b>T Premium</b> through-the-wall INDOOR INSTALLATION (metal powder coated cover, wall ducts, removable grills, metal ducts galvanized, insulated)	1 290
<b>E</b> through-the-wall OUTDOOR INSTALLATION (40mm TTW external aluminum and rubber insulation, winter module, condensate tray defrost, -15°C)	1 050

#### 2. Control:

<b>S</b> standard: built-in mechanical humidistat	0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat	345
<b>W6</b> remote wired humidistat EBERLE HYG6001+ built-in mechanical humidistat	119
<b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat	129

#### 3. Air temperature:

<b>S</b> standard: +22°C...+42°C	0
<b>T</b> +15°C...+42°C (with antifreeze thermostat)	57

#### 4. Air heating:

<b>S</b> standard: without LPHW (Low Pressure Hot Water)	0
<b>H</b> LPHW, 3.5 kW, without regulation, contact for external thermostat 230V/5A	228
<b>V</b> LPHW, 3.5 kW, with solenoid valve (in standard version – external contact 230V/5A) (with EASY 300 – fully automatic regulation + no current contact)	442
<b>E</b> Electrical heating 2 kW	486

#### 5. LPHW connection:

<b>S</b> standard: N/A (without LPHW)	0
<b>B</b> from the back	0
<b>R</b> from right	0
<b>L</b> from left	0

#### 6. micro LIGHT+


<b>S</b> standard: without Pool Security microLIGHT+	0
<b>L</b> Pool Security microLIGHT+	147

#### 7. Air filter:

<b>S</b> standard: without air filter	0
<b>F</b> Air filter (for model with wall or mobile stand installation: 1-S/M option)	52
<b>C</b> Air filter grid (for model with TTW installation: 1-P/E option)	52

#### 8. Fresh air supply:

<b>S</b> standard: without fresh air supply	0
<b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized	35

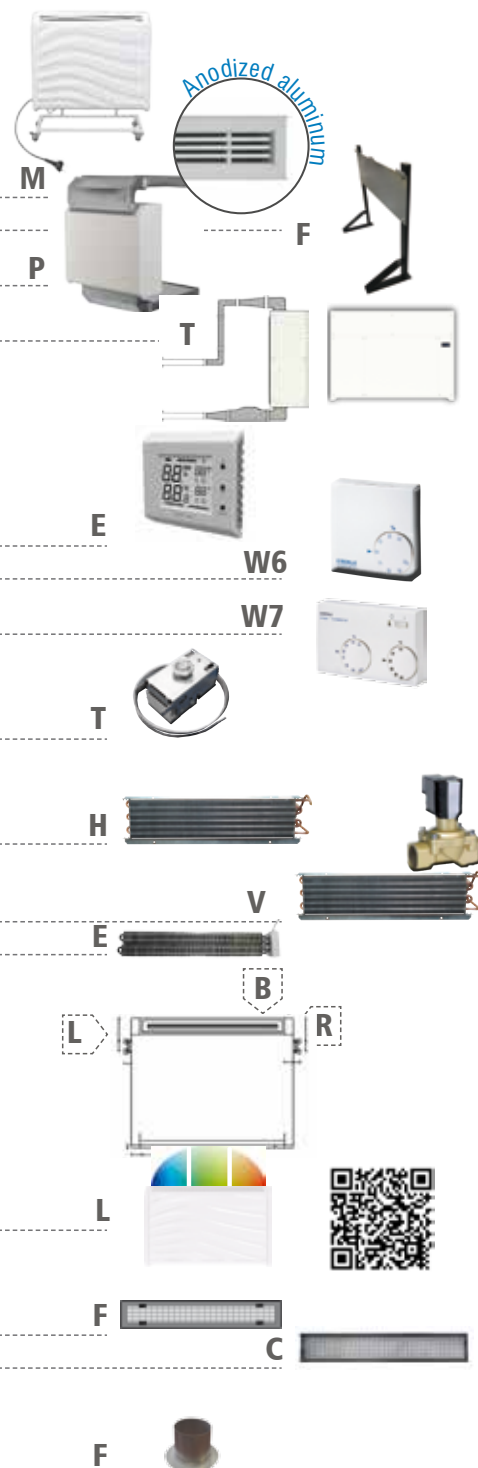

EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

48 l  
45 m<sup>2</sup>

## DRY 400 METAL | DRY 400 SILVER

Cover	Cover	Extraction rate	Air flow
DRY 400 METAL	DRY 400 SILVER	(30°C/60% RH - 30°C/80% RH)	
metal	stainless steel	48-78 l/24hrs	600 m <sup>3</sup> /hour



DRY 400M



DRY 400S

642 mm  
780 mm  
300 mm




DRY 400M - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.

DRY 400S - - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.

Basic equipment:	Model:	Price EXW w/o VAT / EUR/
Dehumidifier, wall console, user's manual installation layout, fixation screws	DRY 400 METAL	3 390
<b>micro COMPRESSOR+</b> <b>ultra QUIET+</b> <b>easy INSTALL+</b> <b>FREE 3 YEARS WARRANTY</b>	DRY 400 SILVER	3 880

1. Color options:		
<b>S</b> standard: silver color 'Tiger'		0
<b>W</b> white (RAL9010) glossy		0
<b>C</b> color selection according to your preference (RAL code)		price on demand
2. Installation:		
<b>S</b> standard: on the wall		0
<b>M</b> mobile stand, 4 wheels, color: silver 'Tiger', white (RAL 9010), 230V EURO plug, 2m		235
<b>F</b> fixed floor stand, color: black RAL9005, 230V EURO plug, 2m		260
3. Control:		
<b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat		0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)		345
<b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)		79
<b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)		88
4. Air temperature:		
<b>S</b> standard: +22°C...+42°C		0
<b>T</b> +15°C...+42°C (with antifreeze thermostat)		57
5. Air heating:		
<b>S</b> standard: without LPHW (Low Pressure Hot Water)		0
<b>H</b> LPHW, 3.5 kW, without regulation (external no current contact)		228
<b>V</b> LPHW, 3.5 kW, fully automatic regulation (with solenoid valve + external no current contact)		442
<b>E</b> Electrical heating 2 kW		486
6. LPHW connection:		
<b>S</b> standard: N/A (without LPHW)		0
<b>B</b> from the back		0
<b>R</b> from right		0
<b>L</b> from left		0
7. micro LIGHT+		
<b>S</b> standard: without Pool Security microLIGHT+		0
<b>L</b> Pool Security microLIGHT+		147
8. Air filter:		
<b>S</b> standard: without air filter		0
<b>F</b> Air filter		52
9. Fresh air supply:		
<b>S</b> standard: without fresh air supply		0
<b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized		35

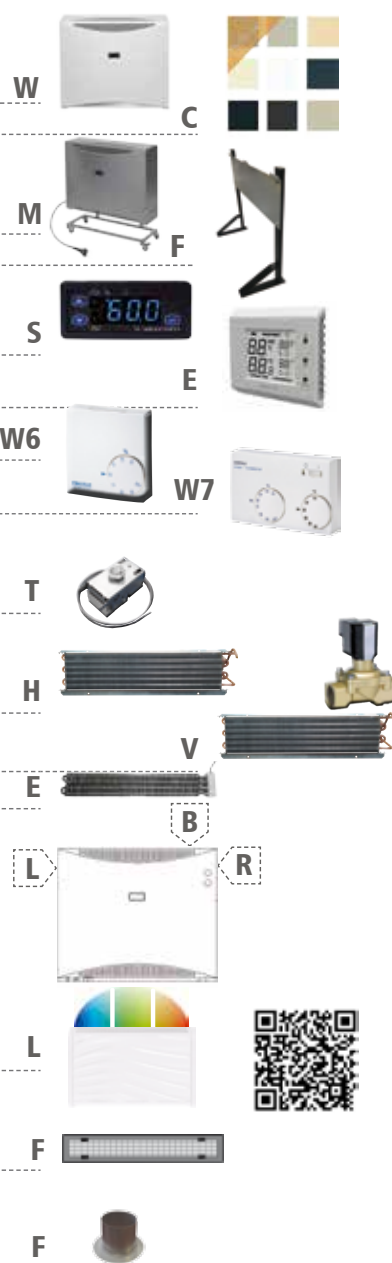

EURO PALETTE packed, FUMIGATED  
15.50€/1pc (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

66 l  
60 m<sup>2</sup>

## DRY 500 WAVE

Cover	Extraction rate (30°C/60% RH - 35°C/95% RH)	Air flow
plastic (acryl)	66-132 l/24hrs	800 m <sup>3</sup> /hour



### DRY 500W - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8.

#### Basic equipment:

Price EXW  
w/o VAT /EUR/

Dehumidifier, wall console, user's manual, installation layout, fixation screws

micro COMPRESSOR+ ultra QUIET+ easy INSTALL+



3 590

#### 1. Installation:

<b>S</b> standard: on the wall	0
<b>M</b> mobile stand, 4 wheels, white color (RAL 9010), 230V EURO plug, 2m	265
<b>F</b> fixed floor stand, color: black RAL9005, 230V EURO plug, 2m	280
<b>P</b> through-the-wall INDOOR INSTALLATION (fiberglass cover with TTW ducts set and removable aluminum grills, metal ducts galvanized, insulated)	595
<b>T Premium</b> through-the-wall INDOOR INSTALLATION (metal powder coated cover, wall ducts, removable grills, metal ducts galvanized, insulated)	1 390
<b>E</b> through-the-wall OUTDOOR INSTALLATION (40mm TTW external aluminum and rubber insulation, winter module, condensate tray defrost, -15°C)	1 150

#### 2. Control:

<b>S</b> standard: built-in mechanical humidistat	0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat	345
<b>W6</b> remote wired humidistat EBERLE HYG6001+built-in mechanical humidistat	119
<b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat	129

#### 3. Air temperature:

<b>S</b> standard: +22°C...+35°C	0
<b>T</b> +15°C...+35°C (with antifreeze thermostat)	57
<b>V</b> +22°C...+42°C (with thermostatic expansion valve)	259
<b>A</b> +15°C...+42°C (T+V)	279
<b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)	385

#### 4. Air heating:

<b>S</b> standard: without LPHW (Low Pressure Hot Water)	0
<b>H</b> LPHW, 5 kW, without regulation, contact for external thermostat 230V/5A	246
<b>V</b> LPHW, 5 kW, with solenoid valve (in standard version – external contact 230V/5A) (with EASY 300 – fully automatic regulation + no current contact)	458
<b>E</b> Electrical heating 2 kW	507

#### 5. LPHW connection:

<b>S</b> standard: N/A (without LPHW)	0
<b>B</b> from the back	0
<b>R</b> from right	0
<b>L</b> from left	0

#### 6. micro LIGHT+

<b>S</b> standard: without Pool Security microLIGHT+	0
<b>L</b> Pool Security microLIGHT+	147


#### 7. Air filter:

<b>S</b> standard: without air filter	0
<b>F</b> Air filter (for model with wall or mobile stand installation: 1-S/M option)	54
<b>C</b> Air filter grid (for model with TTW installation: 1-P/E option)	67

#### 8. Fresh air supply:

<b>S</b> standard: without fresh air supply	0
<b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized	35

EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

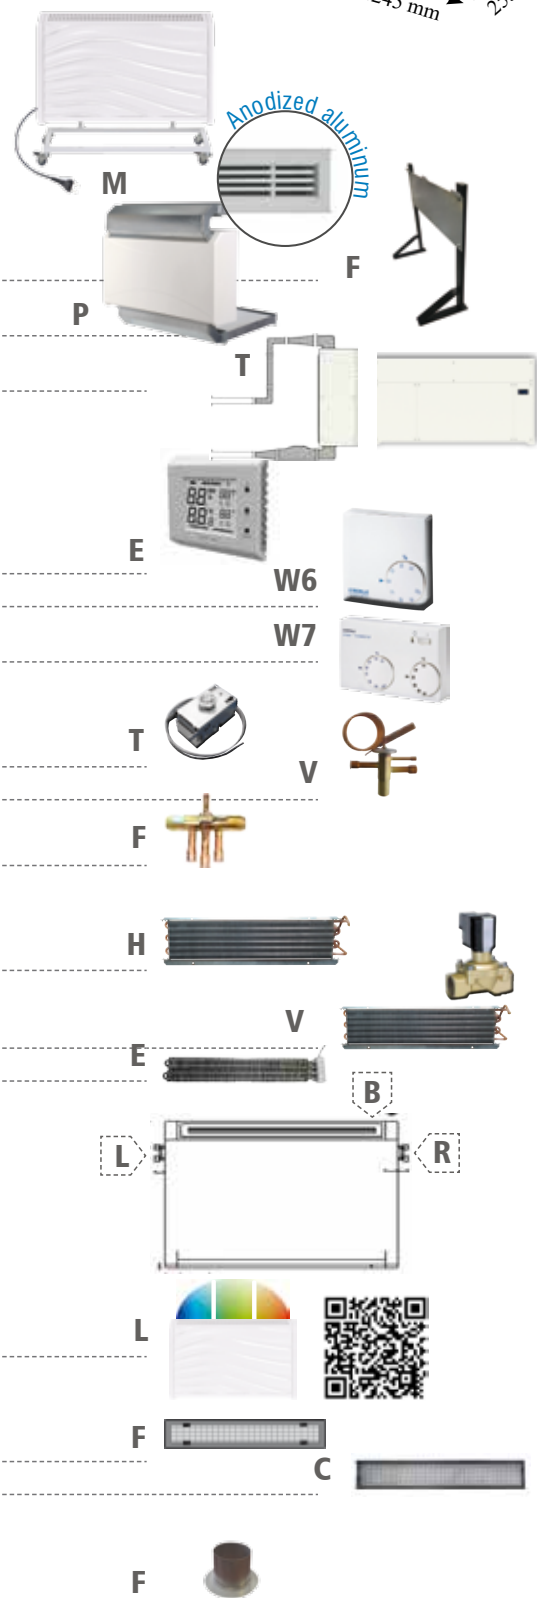




66 l  
60 m<sup>2</sup>

## DRY 500 METAL | DRY 500 SILVER

Cover	Cover	Extraction rate	Air flow
DRY 500 METAL	DRY 500 SILVER	(30°C/60% RH - 35°C/95% RH)	
metal	stainless steel	66-132 l/24hrs	800 m <sup>3</sup> /hour

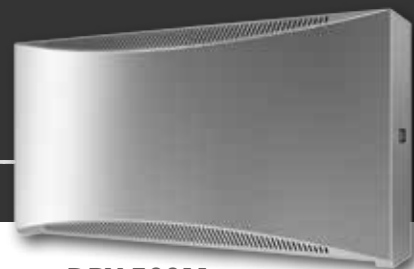

DRY 500M



DRY 500S

1245 mm  
642 mm  
300 mm



100%  
corrosion free  
AlSi316L

DRY 500M - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.

DRY 500S - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.

Basic equipment:	Model:	Price EXW w/o VAT /EUR/
------------------	--------	----------------------------

Dehumidifier, wall console, user's manual, installation layout, fixation screws



DRY 500 METAL 4 290

micro COMPRESSOR+ ultra QUIET+ easy INSTALL+

DRY 500 SILVER 4 990

### 1. Color options:

<b>S</b> standard: silver color, 'Tiger'	0
<b>W</b> white (RAL9010) glossy	0
<b>C</b> Color selection according to your preference (RAL code)	price on demand

### 2. Installation:

<b>S</b> standard: on the wall	0
<b>M</b> mobile stand, 4 wheels, color: silver 'Tiger', white (RAL 9010), 230V EURO plug, 2m	265
<b>F</b> fixed floor stand, color: black RAL9005, 230V EURO plug, 2m	280

### 3. Control:

<b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat	0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	345
<b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	79
<b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	88

### 4. Air temperature:

<b>S</b> standard: +22°C...+35°C	0
<b>T</b> +15°C...+35°C (with antifreeze thermostat)	57
<b>V</b> +22°C...+42°C (with thermostatic expansion valve)	259
<b>A</b> +15°C...+42°C (T+V)	279
<b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)	385

### 5. Air heating:

<b>S</b> standard: without LPHW (Low Pressure Hot Water)	0
<b>H</b> LPHW, 5 kW, without regulation (external no current contact)	246
<b>V</b> LPHW, 5 kW, fully automatic regulation (with solenoid valve + external no current contact)	458
<b>E</b> Electrical heating 2 kW	507

### 6. LPHW connection:

<b>S</b> standard: N/A (without LPHW)	0
<b>B</b> from the back	0
<b>R</b> from right	0
<b>L</b> from left	0

### 7. micro LIGHT+



<b>S</b> standard: without Pool Security microLIGHT+	0
<b>L</b> Pool Security microLIGHT+	147

### 8. Air filter:

<b>S</b> standard: without air filter	0
<b>F</b> Air filter	54

### 9. Fresh air supply:

<b>S</b> standard: without fresh air supply	0
<b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized	35

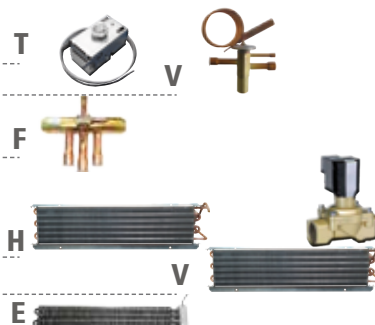

EURO PALLETTE packed, FUMIGATED  
15.50€/1pc (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



90l  
90 m<sup>2</sup>

**DRY 800 WAVE**


120l  
120 m<sup>2</sup>

**DRY 1200 WAVE**

Cover	Extraction rate (30°C/60% RH ~ 35°C/95% RH)	Air flow	Extraction rate (30°C/60% RH ~ 35°C/95% RH)	Air flow
plastic (acryl) white color	90-180 l/24hrs	1100 m <sup>3</sup> /hour	120-240 l/24hrs	1200 m <sup>3</sup> /hour

**DRY 800W** - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8.

**DRY 1200W** - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8.



Basic equipment:	Model:	Price EXW w/o VAT /EUR/
Dehumidifier, floor feet, user's manual	<b>DRY 800 WAVE</b>	<b>4 590</b>
	<b>DRY 1200 WAVE</b>	<b>4 990</b>

**1. Installation:**

<b>S</b> standard: on the floor	0
<b>M</b> on the wall (floor feet + wall console)	135
<b>P</b> through-the-wall INDOOR INSTALLATION (main chassis cover from plastic (acryl) with AIR IN from the back, AIR OUT to the back, including the through-the-wall ducts set and removable aluminum grills, insulated from the inside)	575

**2. Control:**

<b>S</b> standard: built-in mechanical humidistat	0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat	345
<b>F</b> remote wired digital humidistat & thermostat + built-in mechanical humidistat	243
<b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat	79
<b>W7</b> remote wired humidistat EBERLE HYG7001 + built-in mechanical humidistat	88

**3. Air temperature:**

<b>S</b> standard: +22°C...+35°C	0
<b>T</b> +15°C...+35°C (with antifreeze thermostat)	57
<b>B</b> +35°C...+42°C (with solenoid bypass and compressor cooling)	270

**4. Air heating:**

<b>S</b> standard: without LPHW (Low Pressure Hot Water)	0
<b>H</b> LPHW, 7 kW, without regulation (external no current contact)	345
<b>V</b> LPHW, 7 kW, fully automatic regulation (with solenoid valve + external no current contact)	590
<b>E</b> Electrical heating 2.5 kW	570

**5. LPHW connection:**

<b>S</b> standard: N/A (without LPHW)	0
<b>B</b> from the back	0
<b>R</b> from right	0

**6.**


<b>S</b> standard: without Pool Security microLIGHT+	0
<b>L</b> Pool Security microLIGHT+	147

**7. Air filter:**

<b>S</b> standard: without air filter	0
<b>F</b> Air filter (for model with wall or mobile stand installation: 1-S/M option)	54
<b>C</b> Air filter grid (for model with TTW installation: 1-P/E option)	54

**8. Fresh air supply:**

<b>S</b> standard: without fresh air supply	0
<b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized	35

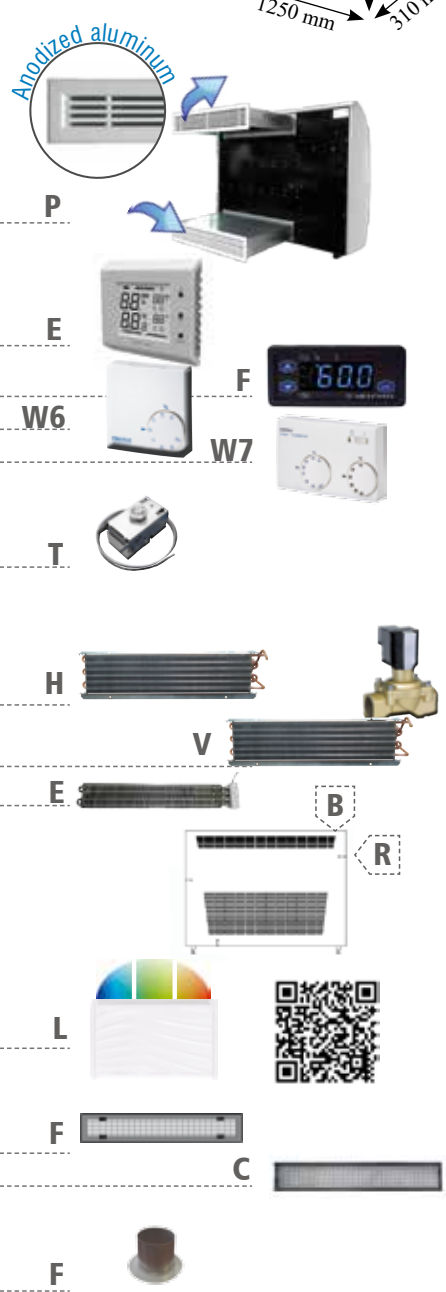

EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

90L  
90 m<sup>2</sup>

**DRY 800 METAL**

120L  
120 m<sup>2</sup>

**DRY 1200 METAL**


Cover	Extraction rate (30°C/60% RH - 35°C/95% RH)	Air flow
metal	90-180 l/24hrs	1100 m <sup>3</sup> /hour

Extraction rate (30°C/60% RH - 35°C/95% RH)	Air flow
120-240 l/24hrs	1200 m <sup>3</sup> /hour

**DRY 800M** - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.  
**DRY 1200M** - 1. - 2. - 3. - 4. - 5. - 6. - 7. - 8. - 9.



SWIMMING POOL DEHUMIDIFIERS

Basic equipment:	Model:	Price EXW w/o VAT /EUR/
Dehumidifier, floor feet, user's manual	<b>DRY 800 METAL</b>	<b>4 990</b>
micro COMPRESSOR+ ultra QUIET+ easy INSTALL+ 	<b>DRY 1200 METAL</b>	<b>5 390</b>

1. Color options:		
<b>S</b> standard: silver color „Tiger“		0
<b>W</b> white (RAL9010) glossy		0
<b>C</b> color selection according to your preference (RAL code)		price on demand

2. Installation:		
<b>S</b> standard: on the floor		0
<b>M</b> on the wall (floor feet + wall console)		135
<b>P</b> through-the-wall INDOOR INSTALLATION (main chassis cover from galvanized metal powder coated RAL9010 with AIR IN from the back, AIR OUT to the back/to the top, including the through-the-wall ducts set and removable grills, insulated from the inside)		325
<b>E</b> through-the-wall OUTDOOR INSTALLATION (40mm TTW external aluminum and rubber insulation, winter module, condensate tray defrost, -15°C)		895

3. Control:		
<b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat		0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)		345
<b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)		79
<b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+ built-in mechanical humidistat (without built-in digital humidistat & thermostat)		88

4. Air temperature:		
<b>S</b> standard: +22°C...+35°C		0
<b>T</b> +15°C...+35°C (with antifreeze thermostat)		57
<b>B</b> +35°C...+42°C (with solenoid bypass and compressor cooling)		270

5. Air heating:		
<b>S</b> standard: without LPHW (Low Pressure Hot Water)		0
<b>H</b> LPHW, 7 kW, without regulation (external no current contact)		345
<b>V</b> LPHW, 7 kW, fully automatic regulation (with solenoid valve + external no current contact)		590
<b>E</b> Electrical heating 2.5 kW		570

6. LPHW connection:		
<b>S</b> standard: N/A (without LPHW)		0
<b>B</b> from the back		0
<b>R</b> from right		0

7. micro LIGHT+		
<b>S</b> standard: without Pool Security microLIGHT+		0
<b>L</b> Pool Security microLIGHT+		147


  


8. Air filter:		
<b>S</b> standard: without air filter		0
<b>F</b> Air filter (for model with wall or floor installation: 2-S/M option)		54
<b>C</b> Air filter grid (for model with TTW installation: 2-P/E option)		67

9. Fresh air supply:		
<b>S</b> standard: without fresh air supply		0
<b>F</b> adapter, Ø 100 mm, 50 mm length, galvanized		35



 **EURO PALETTE** packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



## DRY Salt+ Sulphur+



### Models:

Price EXW /\*  
w/o VAT /EUR/

<b>DRY 300 Salt+ Sulphur+</b>	<b>880</b>
<b>DRY 400 Salt+ Sulphur+</b>	<b>880</b>
<b>DRY 500 Salt+ Sulphur+</b>	<b>1 060</b>
<b>DRY 800 Salt+ Sulphur+</b>	<b>1 240</b>
<b>DRY 1200 Salt+ Sulphur+</b>	<b>1 240</b>

/\* **Brutto Price List price.**  
Distributor rebates apply.

### Basic description:

Special treatment to withstand high concentrations of salt, sulphur and chlorine. Designed for natural salt/sulphur water spa, salt caves or alternatives with natural water spring spa that contains high concentrations of salt or sulphur. This special treatment can be applied also to high chlorine concentration pools where it provides higher resistance thereby longer livelihood of the device. Treatment is also designed to avoid formation of sulphuric acid (H<sub>2</sub>SO<sub>4</sub>).

- Natural spa
- Salt caves
- Chlorine
- Sulphur




Special treatment to withstand high concentration  
of **SALT, SULPHUR and CHLORINE.**



**DRY Salt+ Sulphur+**

**PROLONGS  
LIVELIHOOD OF  
YOUR DEHUMIDIFIER**

IN EXTREME CONDITIONS

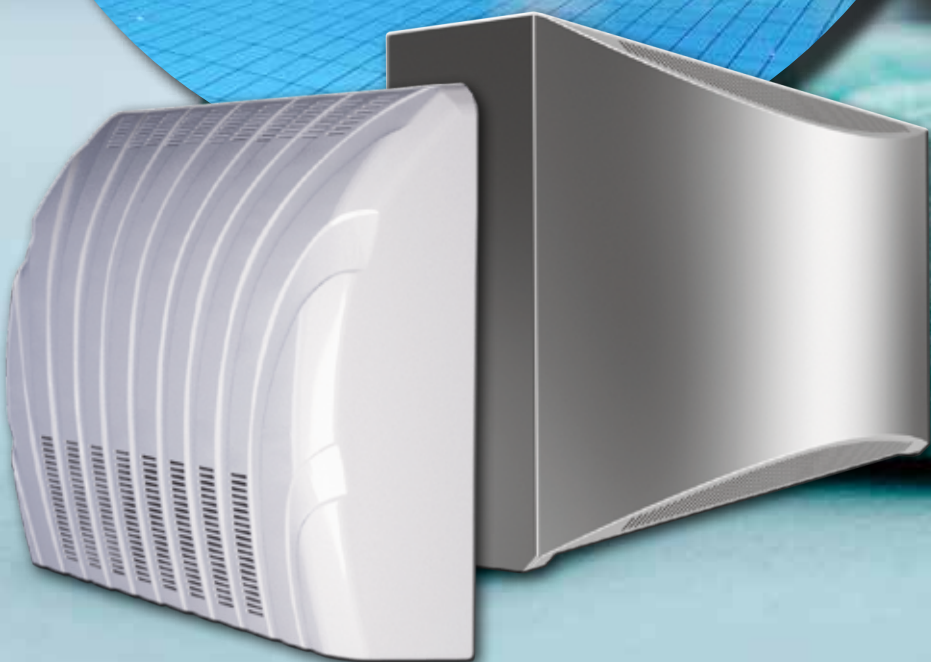

Suitable for natural salt/sulfur  
water spa, salt caves and  
pools with high concentration  
of salt, sulfur or chlorine.

Applicable to  
all models of  
pool dehu-  
midifiers

**8x  
more  
reliable use**

32 l  
30 m<sup>2</sup>

# DRY 300 DUCT

Cover	Extraction rate (30°C/60% RH ~ 35°C/95% RH)	Air flow
metal	32-63 l/24hrs	500 m <sup>3</sup> /hour, 200 Pa



## DRY 300D - 1. - 2. - 3. - 4. - 5. - 6.

**Basic equipment:** Dehumidifier, wall console, fixation screws, user's manual, installation layout; **AIR IN** from the bottom, **AIR OUT** to the top

**Price EXW**  
w/o VAT /EUR/

**3 190**

micro COMPRESSOR+ micro CONTROL+


### 1. Control:

<b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat	0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	345
<b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	79
<b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat (without built-in digital humidistat & thermostat)	88




### 2. Air temperature:

<b>S</b> standard: +22°C...+35°C	0
<b>T</b> +15°C...+35°C (with antifreeze thermostat)	57
<b>V</b> +22°C...+42°C (with thermostatic expansion valve)	259
<b>A</b> +15°C...+42°C (T+V)	279
<b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)	385

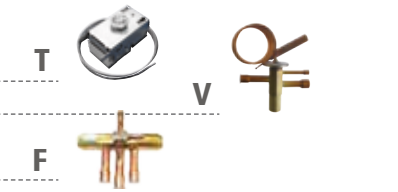

### 3. Air heating:

<b>S</b> standard: without LPHW (Low Pressure Hot Water)	0
<b>H</b> LPHW, 3.5 kW, without regulation (external no current contact)	246
<b>V</b> LPHW, 3.5 kW, fully automatic regulation (with solenoid valve + external no current contact)	458
<b>E</b> Electrical heating, 2 kW	486

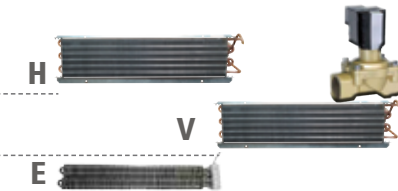

### 4. LPHW connection:


<b>S</b> standard: N/A (without LPHW)	0
<b>B</b> from the back	0
<b>R</b> from right	0

### 5. Air filter console:

<b>S</b> standard: without air filter console	0
<b>C</b> Air filter console 5C, with removable cartouche	150

### 6. Air ducting connection:

<b>S</b> standard: 300x100 from bottom and top	0
<b>F</b> front: 300x100 Air IN, 400x80 Air OUT	80
<b>C</b> combination of above	80

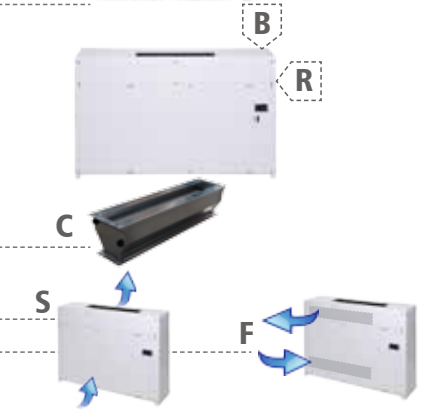

EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



## Find more ACCESSORIES on pages 51-55.

43 l  
40 m<sup>2</sup>

## DRY 400 DUCT

Cover	Extraction rate (30°C/60% RH ~ 35°C/95% RH)	Air flow
metal	43-78 l/24hrs	500 m <sup>3</sup> /hour, 200 Pa



### DRY 400D - 1. - 2. - 3. - 4. - 5. - 6.

#### Basic equipment:

Dehumidifier, wall console, fixation screws, user's manual, installation layout; **AIR IN** from the bottom, **AIR OUT** to the top

Price EXW  
w/o VAT /EUR/

3 550

micro COMPRESSOR+ micro CONTROL+



#### 1. Control:

**S** standard: built-in digital humidistat & thermostat + built-in mechanical humidistat

0

**E** remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)

345

**W6** remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)

79

**W7** remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat (without built-in digital humidistat & thermostat)

88

#### 2. Air temperature:

**S** standard: +22°C...+42°C

0

**T** +15°C...+42°C (with antifreeze thermostat)

57

#### 3. Air heating:

**S** standard: without LPHW (Low Pressure Hot Water)

0

**H** LPHW, 3.5 kW, without regulation (external no current contact)

246

**V** LPHW, 3.5 kW, fully automatic regulation (with solenoid valve + external no current contact)

458

**E** Electrical heating, 2 kW

486

#### 4. LPHW connection:

**S** standard: N/A (without LPHW)

0

**B** from the back

0

**R** from right

0

#### 5. Air filter console:

**S** standard: without air filter console

0

**C** Air filter console 5C, with removable cartouche

150

#### 6. Air ducting connection:

**S** standard: 300x100 from bottom and top


0

**F** front: 300x100 Air IN, 400x80 Air OUT

80

**C** combination of above

80

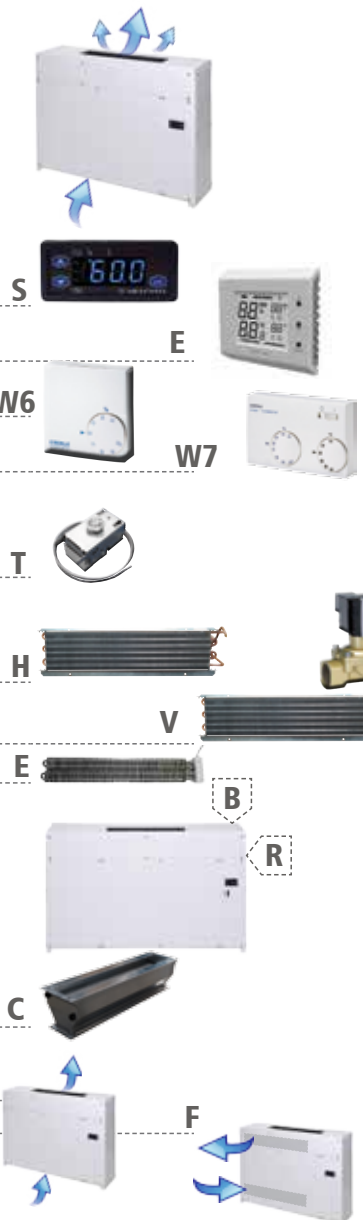

EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

Applications



v. 02/2022

MICROWELL

52 l  
50 m<sup>2</sup>

## DRY 500 DUCT

Cover	Extraction rate (30°C/60% RH ~ 35°C/95% RH)	Air flow
metal	52-132 l/24hrs	1000 m <sup>3</sup> /hour, 200 Pa



### DRY 500D - 1. - 2. - 3. - 4. - 5. - 6.

**Basic equipment:** Dehumidifier, wall console, fixation screws, user's manual, installation layout; **AIR IN** from the bottom, **AIR OUT** to the top  
**Price EXW** w/o VAT /EUR/

**4 190**

micro COMPRESSOR+ micro CONTROL+


#### 1. Control:

<b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat	0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	345
<b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)	79
<b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat (without built-in digital humidistat & thermostat)	88




#### 2. Air temperature:

<b>S</b> standard: +22°C...+35°C	0
<b>T</b> +15°C...+35°C (with antifreeze thermostat)	57
<b>V</b> +22°C...+42°C (with thermostatic expansion valve)	259
<b>A</b> +15°C...+42°C (T+V)	279
<b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)	385

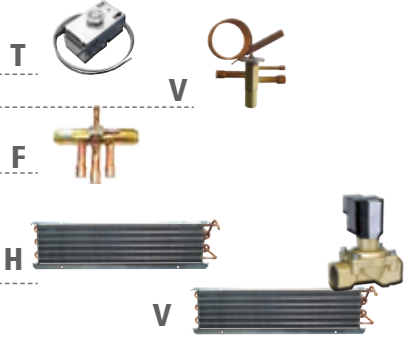

#### 3. Air heating:

<b>S</b> standard: without LPHW (Low Pressure Hot Water)	0
<b>H</b> LPHW, 5 kW, without regulation (external no current contact)	246
<b>V</b> LPHW, 5 kW, fully automatic regulation (with solenoid valve + external no current contact)	458
<b>E</b> Electrical heating, 2 kW	486

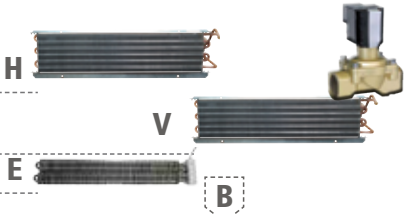


#### 4. LPHW connection:

<b>S</b> standard: N/A (without LPHW)	0
<b>B</b> from the back	0
<b>R</b> from right	0




#### 5. Air filter console:

<b>S</b> standard: without air filter console	0
<b>C</b> Air filter console 5C, with removable cartouche	170



#### 6. Air ducting connection:

<b>S</b> standard: 500x100 from bottom and top	0
<b>F</b> front: 500x100 Air IN, 400x80 Air OUT	80
<b>C</b> combination of above	80

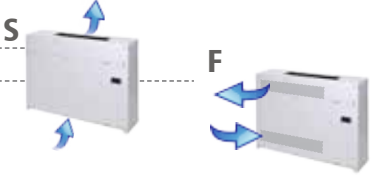

EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



## Find more ACCESSORIES on pages 51-55.



<b>88l</b> <b>80 m<sup>2</sup></b>	<b>DRY 800 DUCT</b>	<b>112l</b> <b>110 m<sup>2</sup></b>	<b>DRY 1200 DUCT</b>
<b>Cover</b>	<b>Extraction rate</b> <small>(30°C/60% RH ~ 35°C/95% RH)</small>	<b>Air flow</b>	
metal	88-180 l/24hrs	1100 m <sup>3</sup> /hour, 170 Pa	112-240 l/24hrs  1200 m <sup>3</sup> /hour, 145 Pa




**DRY 800D** - 1. - 2. - 3. - 4. - 5. - 6.6.

**DRY 1200D** - 1. - 2. - 3. - 4. - 5. - 6.6.

Basic equipment:	Model:	Price EXW w/o VAT /EUR/
Dehumidifier, wall console, fixation screws, user's manual, installation layout	<b>DRY 800 DUCT</b>	<b>5 280</b>
	<b>DRY 1200 DUCT</b>	<b>5 990</b>

1. Control:		
<b>S</b> standard: standard: built-in digital humidistat & thermostat + built-in mechanical humidistat		0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)		345
<b>W6</b> remote wired humidistat EBERLE HYG6001 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)		79
<b>W7</b> remote wired humidistat & thermostat EBERLE HYG7001+built-in mechanical humidistat (without built-in digital humidistat & thermostat)		88
2. Air temperature:		
<b>S</b> standard: +22°C...+35°C		0
<b>T</b> +15°C...+35°C (with antifreeze thermostat)		57
<b>B</b> +35°C...+42°C (with solenoid bypass and compressor cooling)		270
3. Air heating:		
<b>S</b> standard: without LPHW (Low Pressure Hot Water)		0
<b>H</b> LPHW, 7 kW, without regulation (external no current contact)		345
<b>V</b> LPHW, 7 kW, fully automatic regulation (with solenoid valve + external no current contact)		590
<b>E</b> Electrical heating 2.5 kW		570
4. LPHW connection:		
<b>S</b> standard: N/A (without LPHW)		0
<b>B</b> from the back		0
<b>R</b> from right		0
5. Air filter console:		
<b>S</b> standard: without air filter console		0
<b>C</b> Air filter console 5C, with removable cartouche		250
6. Air ducting connection:		
AIR IN:		
<b>A</b> from behind /700x100mm/		0
<b>B</b> from the front /700x100mm/		50
AIR OUT:		
<b>A</b> from behind /700x100mm/		0
<b>B</b> from the front /700x100mm/		50
<b>C</b> from the top /700x100mm/		0

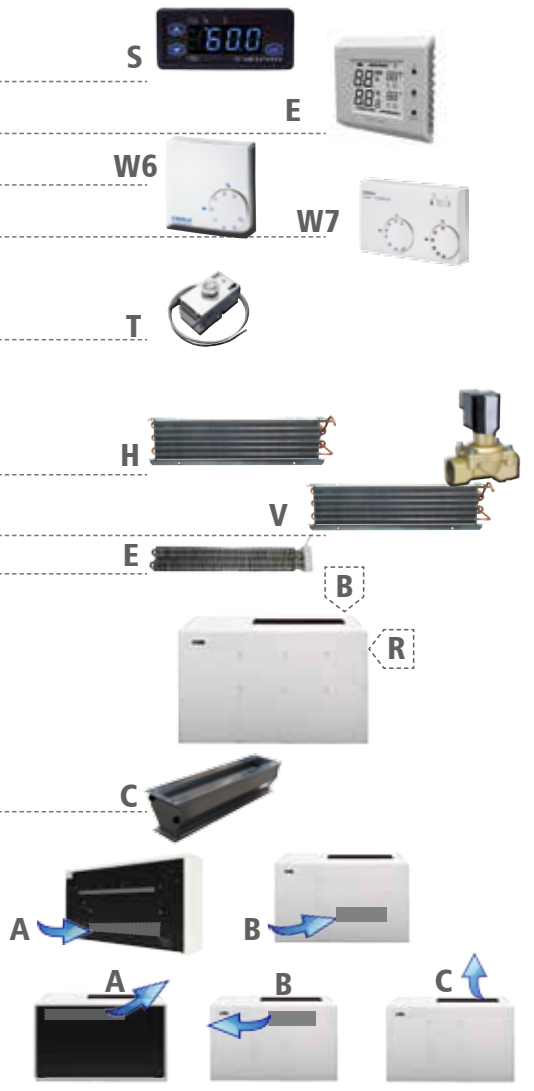

**EURO PALETTE packed, FUMIGATED**  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



<b>67 l / 60 m<sup>2</sup></b> <b>SIREN Eco mono</b>			<b>134 l / 120 m<sup>2</sup></b> <b>SIREN Eco due</b>	
<b>Cover</b>	<b>Extraction rate</b> (30°C/60% RH ~ 35°C/95% RH)	<b>Air flow</b>	<b>Extraction rate</b> (30°C/60% RH ~ 35°C/95% RH)	<b>Air flow</b>
plastic (acryl) white color	67-130 l/24hrs	1000 m <sup>3</sup> / hour	134-260 l/24hrs	2000 m <sup>3</sup> /hour

**SIREN Eco mono** - 1. - 2. - 3. - 4. - 5.

**SIREN Eco due** - 1. - 2. - 3. - 4. - 5.

Basic equipment:	Model:	Price EXW w/o VAT /EUR/
ceiling unit, compressor unit, remote control, wall consoles for compressor unit, ceiling lifting mechanism, Bluetooth speaker, LED light, hot gas defrost, user's manual	<b>SIREN Eco mono</b>	<b>7 340</b>
2x ceiling unit, compressor unit, remote control, wall consoles for compressor unit, ceiling lifting mechanism, Bluetooth speaker, LED light, hot gas defrost, user's manual	<b>SIREN Eco due</b>	<b>12 980</b>

- micro LIGHT+
- micro ENERGY+
- micro SAFETY+
- micro COMPRESSOR+
- ultra QUIET+
- FREE  
3 YEARS  
WARRANTY

1. Ceiling unit installation:	
<b>S</b> concrete ceiling	0
<b>B</b> wooden beam	0
2. Cable length:	
<b>S</b> 10m	0
<b>M</b> 20m	70
<b>L</b> 30m	90
3. Copper pipes:	
<b>S</b> standard: without copper pipes	0
<b>A</b> Insulated copper pipes D10 (3/8" x 1)+D12 (1/2" x 1) - 50m package <i>/Rebate not applicable. This is the final purchase price./</i>	337.50
4. Additional pump:	
<b>S</b> standard: Condensate pump, vertical discharge 20cm	0
<b>A</b> Pump SI 82 – condensing, with tank 2l, 500l/h, max. 5m <i>/Rebate not applicable. This is the final purchase price./</i>	75
5. Condensate hose:	
<b>S</b> standard: with 1m condensate hose	0
<b>A</b> Condensate hose with metal spiral 18/12mm – 1 standard meter	4.50



**EURO PALETTE** packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



# Perfect dehumidification without limits

MICROWELL SIREN ECO is the ultimate superstar, the first ceiling swimming pool dehumidifier in the world. Combining all what Microwell technology has to offer, SIREN ECO is an intelligent and visually captivating solution of paramount performance, setting a new tide in the industry.

As the first round ceiling dehumidifier it is constructed as dual split unit, capable of all round and thorough humidity extraction.

**SPLIT  
system**

**Wireless  
control**

DEHUMIDIFIER



microLIGHT+



LOUDSPEAKER



LED LAMP



# Siren Eco

up to 120 m<sup>2</sup> pool surface

22 l 90 m <sup>3</sup> /*	<b>DRY 300 GALLERY</b>			38 l 135 m <sup>3</sup> /*	<b>DRY 400 GALLERY</b>	
	Cover	Extraction rate (25°C, 50%RH)	Air flow		Extraction rate (25°C, 50%RH)	Air flow
	wooden wardrobe construction	22 l/24hrs	550 m <sup>3</sup> /h		38 l/hrs	600 m <sup>3</sup> /h




**DRY 300G** - 1. - 2. - 3.


**DRY 400G** - 1. - 2. - 3.

Basic equipment:	Model:	Price EXW w/o VAT /EUR/
Fully mobile dehumidifier, 20 liter condensation tank, mobile cart, water tank drainage, float switch, user's manual	<b>DRY 300 GALLERY</b>	<b>3 290</b>
<b>micro COMPRESSOR+</b>	<b>DRY 400 GALLERY</b>	<b>3 590</b>

1. Control:		
<b>S</b> standard: built-in digital humidistat & thermostat + built-in mechanical humidistat		0
<b>E</b> remote wireless humidistat & thermostat DRY EASY 300 + built-in mechanical humidistat (without built-in digital humidistat & thermostat)		345
2. Air temperature:		
<b>S</b> standard: +15°C...+35°C		0
<b>F</b> +5°C...+35°C (with 4-way valve hot gas defrost)		246
3. Air filter:		
<b>S</b> standard: without air filter		0
<b>F</b> Air filter		56

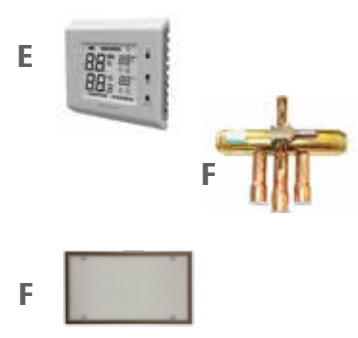

Basic equipment includes:

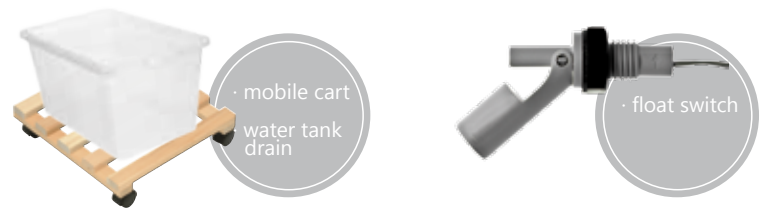

**EURO PALETTE** packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



**Suitable for  
small exhibition spaces**

Picture is illustratory.


40 l day	T40   TE40		90 l day	T90   TE9		120 l day	T120   TE120	
	Cover	Operating range		Nominal air delivery	Operating range		Nominal air delivery	Operating range
	metal	0°C - 35°C	500 m³/hour	0°C - 35°C	1100 m³/hour	0°C - 35°C	1500 m³/hour	




ENERGY CONSUMPTION  
from **650W**




### T40 | TE40

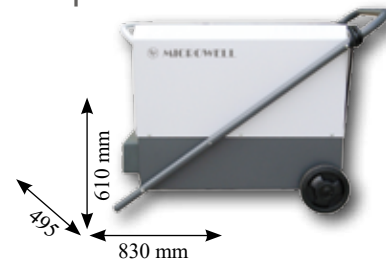

### T90 | TE90

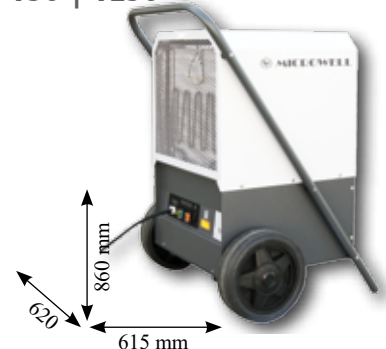

### T120 | TE120

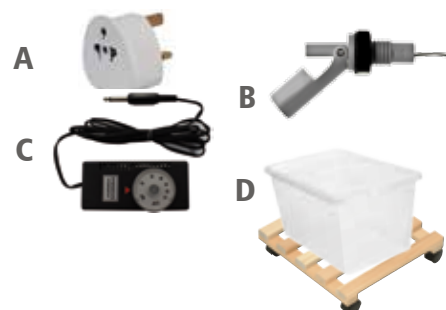

/\* Final prices. Discount does not apply on these items.

Basic equipment:	Price EXW /* w/o VAT /EUR/
Fully mobile dehumidifier, user's manual, EU plug, on-off	
Designed for drying up buildings, new construction sites, warehouses, as well as non-heated and flooded buildings with high level of humidity.	
<b>easy INSTALL+</b>	
<b>T40</b>	<b>1 150</b>
<b>TE40</b>	<b>1 190</b>
with Electrical heater, 2 kW	
<b>T90</b>	<b>1 800</b>
<b>TE90</b>	<b>1 990</b>
with Electrical heater, 2 kW	
<b>T120</b>	<b>2 100</b>
<b>TE120</b>	<b>2 250</b>
with Electrical heater, 2 kW	

Additional equipment:	Price EXW /* w/o VAT /EUR/
<b>A</b> UK plug conversion	20
<b>B</b> Float switch	90
<b>C</b> External hygostat	100
<b>D</b> 20l bucket with mobile base (4 wheels)	85



Picture is illustratory.


**Suitable for construction sites, buildings, rooms after reconstruction**



EURO PALLETTE packed, FUMIGATED

**15.50€/1pc**

(Depending on the model it is possible to pack more units on EUP (2-6pcs).)

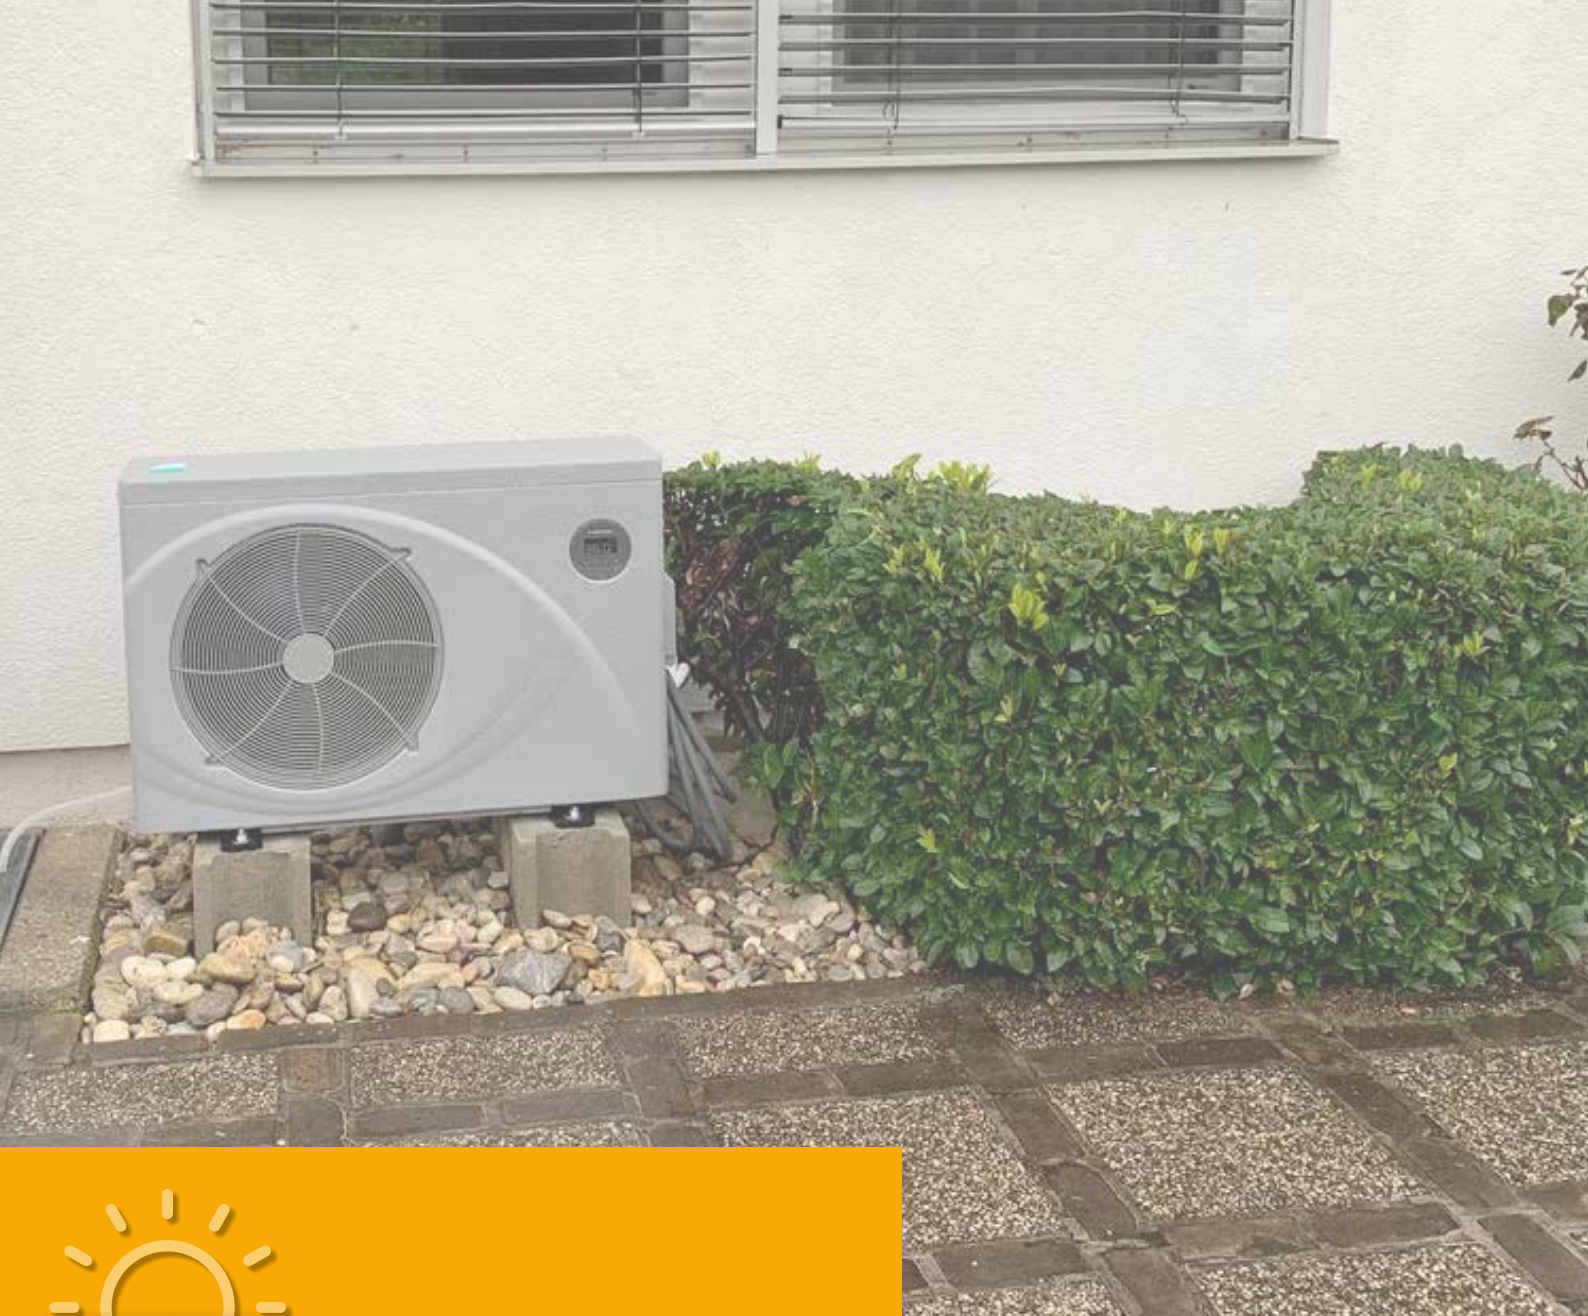

# Heat pumps

ON-OFF & INVERTER models

Available in COMPACT & SPLIT versions

For seasonal, or full year using

**Variety of models to fit every pool.**

**Excellent craftsmanship and experience.**

MICROWELL HP range of swimming pool heat pumps are operating on the principle of renewable energy, designed for continuous and stable production of water heating or cooling.

Their exceptional efficiency, low environment impact and low costs are the result of superior technology, putting them at the industry's forefront.



# MICROWELL HP Line 2022

	Model	Version	Pool capacity (cover/no cover)	(A27/W27, RH80%)			Air temperature (WINTER modification)	Cooling capacity (A35/W28) (HP BLACK -A43/W35)	Water flow	Power supply	El. connection / protection	Titanium	Acoustic pressure level (1m/10m)	Dimensions netto (W x H x D) condensing unit	Weight netto
				Heat capacity	Power cons.	COP									
			m <sup>3</sup>	kW	kW	COP	°C	kW	m <sup>3</sup> /h	V AC/ Ph	mm <sup>2</sup>	Grade & Surface /*	dB(A)	mm	kg
FULL YEAR or SEASONAL - ON-OFF	<b>HP1000 GREEN</b>		45 / 30	<b>9.2</b>	1.4	6.1	0...+43 (-15...+43)	4.9	4	230/1	3x25/ C16A	Gr 1 ASTM265 0.42 m <sup>2</sup>	46/29	910x620x360	39
	<b>HP1400 GREEN</b>		55 / 40	<b>12.3</b>	1.8	6.0	0...+43 (-15...+43)	6.2	5.3	230/1	3x25/ C16A	Gr 1 ASTM265 0.6 m <sup>2</sup>	52/32	1000x665x385	49
	<b>HP1700 GREEN</b>		70 / 50	<b>16.2</b>	2.4	6.0	0...+43 (-15...+43)	8.3	7.1	230/1	3x4/ C20A	Gr 1 ASTM265 0.6 m <sup>2</sup>	54/35	1000x665x385	56
	<b>HP2300 INVENTOR (3f)</b>		80 / 60	<b>23</b>	3.59	6.4	-5...+40 (-15...+40) (-5...+60)	20.1	8-10	400/3	5x25/ C10A	Gr2 ASTM B338 0.95 m <sup>2</sup>	56/38	942x1550x360 (942x1250x360)	118
	<b>HP2800 INVENTOR (3f)</b>		120 / 80	<b>28.4</b>	4.44	6.4	-5...+40 (-15...+40) (-5...+60)	25.0	8-12	400/3	5x25/ C10A	Gr2 ASTM B338 1.2 m <sup>2</sup>	56/38	942x1550x360 (942x1250x360)	120
SEASONAL - INVERTER	<b>HP900 BLACK Inverter</b>		40 / 15-30	<b>9.0</b>	0.2~1.6	11~5.8	0...+43	2.7	2.7	230/1	3x25/ C16A	Gr 1 ASTM265 0.4 m <sup>2</sup>	49/40	888x609x377	43
	<b>HP1100 BLACK Inverter</b>		45 / 25-35	<b>11.5</b>	0.2~1.9	11~5.9	0...+43	3.5	3.3	230/1	3x25/ C16A	Gr 1 ASTM265 0.5 m <sup>2</sup>	50/41	888x609x377	44
	<b>HP1500 BLACK Inverter</b>		65 / 35-50	<b>15.0</b>	0.3~2.7	11~5.7	0...+43	5.4	4.4	230/1	3x25/ C16A	Gr 1 ASTM265 0.6 m <sup>2</sup>	53/43	972x766x427	61
FULL YEAR - INVERTER	<b>HP1100 GREEN Inverter Pro</b>		65 / 30	<b>10.8</b>	1.7-0.8	6.4-14	-15...+43	4.5	3-5	230/1	3x25/ C16A	Gr 1 ASTM265 0.52 m <sup>2</sup>	42/29	990x657x340	49
	<b>HP1500 GREEN Inverter Pro</b>		80 / 40	<b>15.0</b>	2.3-1.0	6.5-15	-15...+43	6.7	5-7	230/1	3x25/ C16A	Gr 1 ASTM265 0.7 m <sup>2</sup>	45/24	990x657x340	52
	<b>HP1700 GREEN Inverter Pro</b>		95 / 45	<b>17.0</b>	2.6-1.1	6.5-15	-15...+43	7.5	6-8	230/1	3x4/ C20A	Gr 1 ASTM265 0.80 m <sup>2</sup>	46/33	954x648x429	63
	<b>HP2100 GREEN Inverter Pro</b>		105 / 50	<b>21.0</b>	3.3-1.4	6.4-14.8	-15...+43	9.5	8-10	230/1	3x4/ C20A	Gr 1 ASTM265 0.9 m <sup>2</sup>	46/33	954x748x429	68
	<b>HP2700 GREEN Inverter Pro (3f)</b>		135 / 60	<b>27.5</b>	4.2-1.8	6.5-15	-15...+43	11.9	10-12	400/3	5x25/ C10A	Gr 1 ASTM265 1.0 m <sup>2</sup>	48/34	1084x948x429	93
FULL YEAR PREMIUM	<b>HP2400 PREMIUM (3f)</b>		80 / 60	<b>24.4</b>	3.51	6.9	-15...+40 (-5...+60)	21.7	8-10	400/3	5x25/ C10A	Gr2 ASTM B338 1.2 m <sup>2</sup>	56/38	942x1550x360 (942x1250x360)	118
	<b>HP3000 PREMIUM (3f)</b>		120 / 80	<b>30.1</b>	4.34	6.9	-15...+40 (-5...+60)	26.8	8-12	400/3	5x25/ C10A	Gr2 ASTM B338 1.4 m <sup>2</sup>	56/38	942x1550x360 (942x1250x360)	120
COMMERCIAL - INVERTER	<b>iMax 60 (3f)</b>		125-260	<b>60.2</b>	5.7	10.5	-10...+43 (0...+55)	26.8	20-25	400/3	-	Gr 1 ASTM265 3.0 m <sup>2</sup>	61/41	1000x1260x1110	212
	<b>iMax 110 (3f)</b>		250-520	<b>115.0</b>	11.5	10.0	-10...+43 (0...+55)	53.5	40-50	400/3	-	Gr 1 ASTM265 6.0 m <sup>2</sup>	64/44	2100x1280x1090	459





COMPACT / SPLIT

COMPACT

Notes: The manufacturer reserves the right to change the parameters without notice.

/\* **Grade 1** titanium is the first of commercially available pure titanium grades. It is the softest and most ductile type of titanium material. It possesses the greatest formability and excellent corrosion resistance. Grade 1 titanium will ensure long happy life of your heat pump and will also prevent possible transport damage due to its high impact toughness.

**Grade 2** titanium most common within commercially pure titanium grades. It shares many qualities of Grade 1 titanium but given its compound it is slightly stronger than Grade 1. Both are equally corrosion resistant. Grade 2 is easy to weld, strong but less resistant to impact than Grade 1.



9.2 kW  
45 m<sup>3</sup>

## HP 1000 GREEN

12.3 kW  
55 m<sup>3</sup>

## HP 1400 GREEN



Cover	COP	Heating output	Cooling output	COP	Heating output	Cooling output
ABS plastic	6.1 (A27 W27)*	9.2 kW (A27 W27)*	4.9 kW (A35 W28)*	6.0 (A27 W27)*	12.3 kW (A27 W27)*	6.2 kW (A35 W28)*


**SEASON**  
0~43°C

**FULL YEAR**  
-15~43°C

**HP 1000 GREEN Compact** - 1. - 2.  
**HP 1400 GREEN Compact** - 1. - 2.



HP 1000 GREEN




EXCHANGER EQUIPPED with 0.42 m<sup>2</sup> of TITANIUM

Basic equipment:	Model:	Price EXW w/o VAT /EUR/
Heat pump (including 4-way valve hot gas defrost and GoldFin), user's manual	<b>HP 1000 GREEN Compact</b>	<b>1 490</b>
anti VIBRATION + ultra QUIET + easy INSTALL +	<b>HP 1400 GREEN Compact</b>	<b>1 590</b>

1. Wi-Fi:	
S standard: without Wi-Fi	0
W with Wi-Fi	65
2. Full year modification:	
S standard: without WINTER module (0~43°C)	0
W WINTER module (-15~43°C)	485
3. Chiller adjustment:	
S standard: without	0
C CHILLER (extra thermal insulation) ... to allow water cooling to +8°C	140
Protection cover:	
Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood /Rebate does not apply on this item. This is the actual purchase price./	70



HP 1400 GREEN



EXCHANGER EQUIPPED with 0.6 m<sup>2</sup> of TITANIUM

**HP 1000 GREEN Split** - 1. - 2.  
**HP 1400 GREEN Split** - 1. - 2.



Basic equipment:	Model:	Price EXW w/o VAT /EUR/
Heat pump (including 4-way valve hot gas defrost and GoldFin), user's manual	<b>HP 1000 GREEN Split</b>	<b>1 890</b>
anti VIBRATION + ultra QUIET + easy INSTALL +	<b>HP 1400 GREEN Split</b>	<b>2 090</b>

1. Wi-Fi:	
S standard: without Wi-Fi	0
W with Wi-Fi	65
2. Full year modification:	
S standard: without WINTER module (0~43°C)	0
W WINTER module (-15~43°C)	485
3. Chiller adjustment:	
S standard: without	0
C CHILLER (extra thermal insulation) ... to allow water cooling to +8°C	140
Protection cover:	
Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood /Rebate does not apply on this item. This is the actual purchase price./	70



Wi-Fi modul



Protection cover

EURO PALETTE packed, FUMIGATED  
15.50€/1pc (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



GREEN R32 LINE



16.2 kW  
70 m<sup>3</sup>

## HP 1700 GREEN

Cover	COP	Heating output	Heating output	Cooling output
ABS plastic	6.0 (A27 W27)*	11.3 kW (A15 W26RH70)	16.2 kW (A27 W27RH80)	8.3 kW (A35 W28RH80)



**SEASON**  
0~43°C

**FULL YEAR**  
-15~43°C

### HP 1700 GREEN Compact - 1. - 2.



#### Basic equipment:

Heat pump (including 4-way valve hot gas defrost and GoldFin), user's manual

**Price EXW**  
w/o VAT /EUR/

**1 990**

anti VIBRATION + ultra QUIET + easy INSTALL+

#### 1. Wi-Fi:

<b>S</b> standard: without Wi-Fi	0
<b>W</b> with Wi-Fi	65

#### 2. Full year modification:

<b>S</b> standard: without WINTER module (0~43°C)	0
<b>W</b> WINTER module (-15~43°C)	485

#### 3. Chiller adjustment:

<b>S</b> standard: without	0
<b>C</b> CHILLER (extra thermal insulation) ... to allow water cooling to +8°C	140

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood <i>Rebate does not apply on this item. This is the actual purchase price./</i>	70
--	----



Wi-Fi modul



Protection cover

### HP 1700 GREEN Split - 1. - 2.



#### Basic equipment:

Heat pump (including 4-way valve hot gas defrost and GoldFin), user's manual

**Price EXW**  
w/o VAT /EUR/

**2 390**

anti VIBRATION + ultra QUIET + easy INSTALL+

#### 1. Wi-Fi:

<b>S</b> standard: without Wi-Fi	0
<b>W</b> with Wi-Fi	65

#### 2. Full year modification:

<b>S</b> standard: without WINTER module (0~43°C)	0
<b>W</b> WINTER module (-15~43°C)	485

#### 3. Chiller adjustment:

<b>S</b> standard: without	0
<b>C</b> CHILLER (extra thermal insulation) ... to allow water cooling to +8°C	140

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood <i>/Rebate does not apply on this item. This is the actual purchase price./</i>	70
---	----



EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

23 kW 80 m <sup>3</sup>		<b>HP 2300 INVENTOR Compact</b>			28.4 kW 120 m <sup>3</sup>		<b>HP 2800 INVENTOR Compact</b>	
Cover	COP	Heating output	Cooling output	COP	Heating output	Cooling output		
metal	5.8 - 7.6 (A26 W26)*	20.9-27.2 kW (A26 W26)*	20.1 kW (A30 W35)*	5.8 - 7.6 (A26 W26)*	25.8-33.5 kW (A26 W26)*	25 kW (A30 W35)*		

<b>SEASON</b> -5~40°C	<b>FULL YEAR</b> -15~40°C	<b>TROPICAL</b> -5~60°C
--------------------------	------------------------------	----------------------------



**HP 2300 INVENTOR C** - 1. - 2. - 3. - 4.



EXCHANGER EQUIPPED with 0.95 m<sup>2</sup> of TITANIUM

**HP 2800 INVENTOR C** - 1. - 2. - 3. - 4.



EXCHANGER EQUIPPED with 1.2 m<sup>2</sup> of TITANIUM



Basic equipment:	Model:	Price EXW w/o VAT /EUR/
Heat pump (including GoldFin, Panasonic/Sanyo compressor, 4-way valve hot gas defrost, EEV), user's manual	<b>HP 2300 INVENTOR C</b>	<b>4 100</b>
micro COMPRESSOR + micro ECONOMY + anti VIBRATION + anti FREEZE + ultra QUIET +	<b>HP 2800 INVENTOR C</b>	<b>4 600</b>

1. Full year modification:		
<b>S</b> standard: without WINTER module (-5°C...+40°C)		0
<b>W</b> with WINTER module (-15°C...+40°C)		350
2. Tropical / Chiller adjustment:		
<b>S</b> standard: without		0
<b>T</b> TROPICAL KIT (extra compressor cooling) ... up to 60°C ambient air		270
<b>C</b> CHILLER (extra thermal insulation) ... to allow water cooling to +5°C		215
3. Control display placement:		
<b>S</b> standard: control display placed on the heat pump		0
<b>W</b> wall installation (out of the heat pump), includes wall plaster box, 30m cable		40
4. Wi-Fi:		
<b>S</b> standard: without Wi-Fi		0
<b>W</b> with Wi-Fi		49
Protection cover:		
Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood /Rebate does not apply on this item. This is the actual purchase price./		140
Self-regulating heating cable:		
230V/4m/64W, Euro plug 2m, IP68 /Rebate does not apply on this item. This is the actual purchase price./		28.50



ALLOWING HEAT PUMP USAGE IN AMBIENT AIR FROM +42°C TO +60°C.



Wi-Fi modul



Cable



Protection cover

**EXCHANGER EQUIPPED WITH TITANIUM**

EURO PALLETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

**REGULATION OVER Wi-Fi**  
ANDROID and IOS APP available for free

Smart HP

23 kW  
80 m<sup>3</sup>

## HP 2300 INVENTOR Split

Cover	COP	Heating output	Cooling output
metal	5.8 - 7.6 (A26 W26)*	20.9-27.2 kW (A26 W26)*	20.1 kW (A30 W35)*

28.4kW  
120 m<sup>3</sup>

## HP 2800 INVENTOR Split

COP	Heating output	Cooling output
5.8 - 7.6 (A26 W26)*	25.8-33.5 kW (A26 W26)*	25 kW (A30 W35)*

SEASON  
-5~40°C

FULL YEAR  
-15~40°C

TROPICAL  
-5~60°C



HP 2300 INVENTOR S - 1. - 2. - 3. - 4.



EXCHANGER EQUIPPED with  
0.95 m<sup>2</sup> of TITANIUM

HP 2800 INVENTOR S - 1. - 2. - 3. - 4.




EXCHANGER EQUIPPED with  
1.2 m<sup>2</sup> of TITANIUM



SWIMMING POOL HEAT PUMPS - ON-OFF

Basic equipment:	Model:	Price EXW w/o VAT /EUR/
Air unit (including GoldFin, Panasonic/Sanyo compressor, 4-way valve hot gas defrost, EEV), Hydro kit - water titanium exchanger (installation in technical room), user's manual	<b>HP 2300 INVENTOR S</b>	<b>4 100</b>
micro COMPRESSOR+    micro ECONOMY+ anti VIBRATION+    anti FREEZE+    ultra QUIET+	<b>HP 2800 INVENTOR S</b>	<b>4 600</b>
<b>1. Control display placement:</b>		
<b>S</b> standard: digital display placed on outside unit (air unit)		0
<b>W</b> wall installation (out of the heat pump), includes wall plaster box, 30m cable		30
<b>2. Wi-Fi:</b>		
<b>S</b> standard: without Wi-Fi		0
<b>W</b> with Wi-Fi		49
<b>3. Full year modification:</b>		
<b>S</b> standard: without WINTER module (-5°C...+40°C)		0
<b>W</b> with WINTER module (-15°C...+40°C)		350
<b>4. Tropical / Chiller adjustment:</b>		
<b>S</b> standard: without		0
<b>T</b> TROPICAL KIT (extra compressor cooling) ... up to 60°C ambient air		270
<b>C</b> CHILLER (extra thermal insulation) ... to allow water cooling to +5°C		215
<b>Protection cover:</b>		
Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood <i>Rebate does not apply on this item. This is the actual purchase price./</i>		120

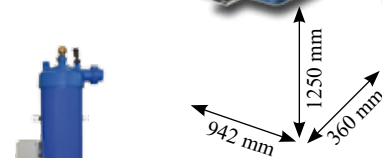

Hydro kit



Wi-Fi modul



Protection cover



ALLOWING HEAT PUMP USAGE IN AMBIENT AIR FROM +42°C TO +60°C.

EXCHANGER EQUIPPED WITH TITANIUM

EURO PALLETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

9kW  
30 m<sup>3</sup>

## HP 900 BLACK Inverter

Cover	COP	Heating output	Cooling output
ABS plastic, black	10.6 - 5.8 (A26 W26)*	1.8 - 9.0 kW (A26 W26)*	2.7 kW (A43 W35)*

11.5kW  
35 m<sup>3</sup>

## HP 1100 BLACK Inverter

COP	Heating output	Cooling output
10.9 - 5.9 (A26 W26)*	2.3 - 11.5 kW (A26 W26)*	3.5 kW (A43 W35)*

SEASON  
0~43°C




### HP 900 BLACK Inverter Compact - 1. - 2.



### HP 1100 BLACK Inverter Compact - 1. - 2.



HP 900/1100 BLACK



Basic equipment:	Model:	Price EXW w/o VAT /EUR/
------------------	--------	-------------------------

Heat pump (including full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, 4-way valve hot gas defrost), protection cover, user's manual

**HP 900 BLACK Compact** **1 850**

**HP 1100 BLACK Compact** **1 990**

anti VIBRATION + ultra QUIET + easy INSTALL +

#### 1. Wi-Fi:

S standard: without Wi-Fi	0
W with Wi-Fi	55

#### 2. Control display placement

S standard: control display placed on the heat pump	0
R remote regulation, 10m cable, touch controller	170

W



S



### HP 900 BLACK Inverter Split - 1. - 2.



### HP 1100 BLACK Inverter Split - 1. - 2.

Basic equipment:	Model:	Price EXW w/o VAT /EUR/
------------------	--------	-------------------------

Heat pump (including full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, 4-way valve hot gas defrost), protection cover, user's manual

**HP 900 BLACK Split** **2 150**

**HP 1100 BLACK Split** **2 390**

anti VIBRATION + ultra QUIET + easy INSTALL +

#### 1. Wi-Fi:

S standard: without Wi-Fi	0
W with Wi-Fi	55

#### 2. Control display placement

S standard: control display placed on the heat pump	0
R remote regulation, 10m cable, touch controller	170



EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



15 kW  
50 m<sup>3</sup>


## HP 1500 BLACK Inverter

Cover	COP	Heating output	Cooling output
ABS plastic, black	10.7 - 5.7 (A26 W26)*	2.9 - 15.4 kW (A26 W26)*	5.4 kW (A43 W35)*

SEASON  
0~43°C



### HP 1500 BLACK Inverter Compact - 1. - 2.



Basic equipment:	Model	Price EXW w/o VAT /EUR/
------------------	-------	----------------------------

Heat pump (including full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, 4-way valve hot gas defrost), protection cover, user's manual

**HP 1500 BLACK Compact** **2 290**

anti VIBRATION + ultra QUIET + easy INSTALL +

#### 1. Wi-Fi:

S standard: without Wi-Fi	0
W with Wi-Fi	55

#### 2. Control display placement

S standard: control display placed on the heat pump	0
R remote regulation, 10m cable, touch controller	170

W



S



### HP 1500 BLACK Inverter Split - 1. - 2.



Basic equipment:	Model:	Price EXW w/o VAT /EUR/
------------------	--------	----------------------------

Heat pump (including full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, 4-way valve hot gas defrost), protection cover, user's manual

**HP 1500 BLACK Split** **2 690**

anti VIBRATION + ultra QUIET + easy INSTALL +

#### 1. Wi-Fi:

S standard: without Wi-Fi	0
W with Wi-Fi	55

#### 2. Control display placement

S standard: control display placed on the heat pump	0
R remote regulation, 10m cable, touch controller	170



EURO PALLETTE packed, FUMIGATED

**15.50€/1pc**

(Depending on the model it is possible to pack more units on EUP (2-6pcs).)



v. 02/2022

**MICROWELL**

10.8 kW  
40 m<sup>3</sup>

## HP 1100 GREEN Inverter Pro


Cover	COP	Heating output	Heating output	Cooling output
ABS plastic	14 - 6.4 (A26 W26)*	8.4 - 10.8 kW (A26 W26)*	12.4 kW (A27 W15RH8o)	4.5 kW (A35 W28)*



**FULL YEAR**  
-15~43°C



### HP 1100 GREEN Inverter Pro Compact



**Basic equipment:**

**Price EXW**  
w/o VAT /EUR/

Heat pump /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

**2 390**

anti **VIBRATION** + ultra **QUIET** + easy **INSTALL** +

**Protection cover:**

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

70

*/Rebate does not apply on this item. This is the actual purchase price./*

### HP 1100 GREEN Inverter Pro Split - 1.



**Basic equipment:**

**Price EXW**  
w/o VAT /EUR/

Split heat pump - separate water unit with remote installation /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

**2 890**

anti **VIBRATION** + ultra **QUIET** + easy **INSTALL** +

**1. Control display placement:**

**S** standard: control display placed on the heat pump

0

**W** wall installation (out of the heat pump), includes wall plaster box IP44, 10m cable, touch controller with Wi-Fi

150

**Protection cover:**

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

70

*/Rebate does not apply on this item. This is the actual purchase price./*



Protection cover

**EURO PALETTE** packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

★ **5 years WARRANTY**  
ON COMPRESSOR ★

★ **5 years WARRANTY**  
ON TITANIUM HEAT EXCHANGER ★

★ **2 years WARRANTY**  
ON SPARE PARTS ★

**REGULATION OVER Wi-Fi**  
ANDROID  
and IOS APP  
available for free



**GREEN R32 LINE**

15 kW  
60 m<sup>3</sup>

## HP 1500 GREEN Inverter Pro


Cover	COP	Heating output	Heating output	Cooling output
ABS plastic	15 - 6.5 (A26 W26)*	11.4 - 15 kW (A26 W26)*	17.3 kW (A27 W15RH8o)	6.7 kW (A35 W28)*



FULL YEAR  
-15~43°C



### HP 1500 GREEN Inverter Pro Compact

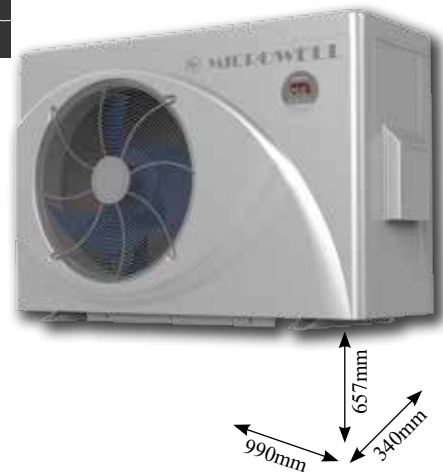

#### Basic equipment:

Heat pump /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

Price EXW  
w/o VAT /EUR/

2 895

anti VIBRATION + ultra QUIET + easy INSTALL+

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

70

/Rebate does not apply on this item. This is the actual purchase price./

### HP 1500 GREEN Inverter Pro Split - 1.



#### Basic equipment:

Split heat pump - separate water unit with remote installation /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

Price EXW  
w/o VAT /EUR/

3 395

anti VIBRATION + ultra QUIET + easy INSTALL+

#### 1. Control display placement:

**S** standard: control display placed on the heat pump

0

**W** wall installation (out of the heat pump), includes wall plaster box IP44, 10m cable, touch controller with Wi-Fi

150

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

70

/Rebate does not apply on this item. This is the actual purchase price./



W



Protection cover

★ 5 years WARRANTY ON COMPRESSOR ★

★ 5 years WARRANTY ON TITANIUM HEAT EXCHANGER ★

★ 2 years WARRANTY ON SPARE PARTS ★



EURO PALLETTE packed, FUMIGATED

15.50€/1pc

(Depending on the model it is possible to pack more units on EUP (2-6pcs).)



17 kW  
95 m<sup>3</sup>

## HP 1700 GREEN Inverter Pro

Cover	COP	Heating output	Heating output	Cooling output
ALUMINUM	15 - 6.5 (A26 W26)*	11.5 - 17.0 kW (A26 W26)*	19.6 kW (A27 W15RH8o)	7.5 kW (A35 W28)*



**FULL YEAR**  
-15~43°C



EXCHANGER  
EQUIPPED with  
0.8m<sup>2</sup>  
of TITANIUM



### HP 1700 GREEN Inverter Pro Compact



**Basic equipment:**

**Price EXW**  
w/o VAT /EUR/

Heat pump /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual


**3 390**

anti **VIBRATION** + ultra **QUIET** + easy **INSTALL** +

**Protection cover:**

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood  
/Rebate does not apply on this item. This is the actual purchase price./

110



### HP 1700 GREEN Inverter Pro Split - 1.



**Basic equipment:**

**Price EXW**  
w/o VAT /EUR/

Split heat pump - separate water unit with remote installation /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

**3 890**

anti **VIBRATION** + ultra **QUIET** + easy **INSTALL** +

**1. Control display placement:**

**S** standard: control display placed on the heat pump

0

**W** wall installation (out of the heat pump), includes wall plaster box IP44, 10m cable, touch controller with Wi-Fi

150

**Protection cover:**

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood  
/Rebate does not apply on this item. This is the actual purchase price./

110



W



Protection cover

**EURO PALETTE** packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

★ **5 years WARRANTY**  
ON COMPRESSOR ★

★ **5 years WARRANTY**  
ON TITANIUM HEAT EXCHANGER ★

★ **2 years WARRANTY**  
ON SPARE PARTS ★

**REGULATION OVER Wi-Fi**  
ANDROID and IOS APP available for free



**GREEN R32 LINE**



24.2 kW  
105 m<sup>3</sup>

## HP 2100 GREEN Inverter Pro


Cover	COP	Heating output	Heating output	Cooling output
ALUMINUM	14.8~6.4 (A26 W26)*	14.5-21kW (A26 W26)*	<b>24.2 kW</b> (A27 W15RH8o)	9.5 kW (A35 W28)*



**FULL YEAR**  
-15~43°C



### HP 2100 GREEN Inverter Pro Compact



FULL YEAR INVERTER HEAT PUMPS

#### Basic equipment:

**Price EXW**  
w/o VAT /EUR/

Heat pump /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

**4 790**

anti VIBRATION + ultra QUIET + easy INSTALL +

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

110

*/Rebate does not apply on this item. This is the actual purchase price./*

### HP 2100 GREEN Inverter Pro Split - 1.



#### Basic equipment:

**Price EXW**  
w/o VAT /EUR/

Split heat pump - separate water unit with remote installation /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

**5 150**

anti VIBRATION + ultra QUIET + easy INSTALL +

#### 1. Control display placement:

**S** standard: control display placed on the heat pump

0

**W** wall installation (out of the heat pump), includes wall plaster box IP44, 10m cable, touch controller with Wi-Fi

150

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

110

*/Rebate does not apply on this item. This is the actual purchase price./*



S



W



Protection cover

★ **5 years WARRANTY**  
ON COMPRESSOR ★

★ **5 years WARRANTY**  
ON TITANIUM HEAT EXCHANGER ★

★ **2 years WARRANTY**  
ON SPARE PARTS ★



EURO PALLETTE packed, FUMIGATED

**15.50€/1pc**

(Depending on the model it is possible to pack more units on EUP (2-6pcs).)



v. 02/2022



41

GREEN R32 LINE


31.6 kW  
135 m<sup>3</sup>

## HP 2700 GREEN Inverter Pro

Cover	COP	Heating output	Heating output	Cooling output
ALUMINUM	15~6.5 (A26 W26)*	18 - 27.5 kW (A26 W26)*	<b>31.6 kW</b> (A27 W15RH80)	11.9 kW (A35 W28)*



**FULL YEAR**  
-15~43°C



### HP 2700 GREEN Inverter Pro Compact



**Basic equipment:**

**Price EXW**  
w/o VAT /EUR/

Heat pump /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

**5 290**

anti **VIBRATION** + ultra **QUIET** + easy **INSTALL** +

**Protection cover:**

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

120

*/Rebate does not apply on this item. This is the actual purchase price./*

### HP 2700 GREEN Inverter Pro Split - 1.



**Basic equipment:**

**Price EXW**  
w/o VAT /EUR/

Split heat pump - separate water unit with remote installation /full stepless inverter DC compressor, brushless DC ventilator, GoldFin/, including 4-way valve hot gas defrost and EEV, condensate tray defrost, WINTER module, WiFi, Touch control, user's manual

**5 690**

anti **VIBRATION** + ultra **QUIET** + easy **INSTALL** +

**1. Control display placement:**

**S** standard: control display placed on the heat pump

0

**W** wall installation (out of the heat pump), includes wall plaster box IP44, 10m cable, touch controller with Wi-Fi

150

**Protection cover:**

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood

120

*/Rebate does not apply on this item. This is the actual purchase price./*



S



W



Protection cover

EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

★ **5 years WARRANTY**  
ON COMPRESSOR ★

★ **5 years WARRANTY**  
ON TITANIUM HEAT EXCHANGER ★

★ **2 years WARRANTY**  
ON SPARE PARTS ★



# COMPACT versus SPLIT



WATER EXCHANGER



TECHNICAL POOL ROOM

- Comfortable full year heating
- Winterizing is not necessary
- No noise, no vibration, no visual distraction



” Split heat pump does not require winterizing because its water exchanger is placed in a place where it does not freeze, such as e.g. technical pool room, cellar or land. ”

24.4 kW 80 m <sup>3</sup>	<b>HP 2400 PREMIUM Compact</b>			30.1kW 120 m <sup>3</sup>	<b>HP 3000 PREMIUM Compact</b>		
	Cover	COP	Heating output		Cooling output	COP	Heating output
	metal	6.5 - 8.5 (A26 W26)*	22.2-28.8 kW (A26 W26)*	21.7 kW (A30 W35)*	6.5 - 8.5 (A26 W26)*	27.4-35.5 kW (A26 W26)*	26.8 kW (A35 W28)*

**FULL YEAR**  
-15~40°C

**TROPICAL**  
-5~60°C



**HP 2400 PREMIUM C**



EXCHANGER EQUIPPED with  
**1.2m<sup>2</sup>**  
of TITANIUM

**HP 3000 PREMIUM C**



EXCHANGER EQUIPPED with  
**1.4m<sup>2</sup>**  
of TITANIUM

Basic equipment:	Model:	Price EXW w/o VAT /EUR/
<ul style="list-style-type: none"> <li>Heat pump (including GoldFin),</li> <li>Full year operation down to -15°C (including complete Winter package: condensate tray defrost, heat exchanger frost protection, winter module),</li> <li>Tropical kit allowing operations up to +60°C ambient air,</li> <li>Water cooling down to +5°C (chiller),</li> <li>Wi-Fi by standard TUYA IOT based App for iOS/Android Smart "POOL VISION",</li> <li>Remote wall controller including 30m cable,</li> <li>Thermally insulated water exchanger,</li> <li>User's manual</li> </ul>	<b>HP 2400 PREMIUM Compact</b>	<b>5 030</b>
	<b>HP 3000 PREMIUM Compact</b>	<b>5 500</b>
<p>micro COMPRESSOR+    micro ECONOMY+    anti VIBRATION+    anti FREEZE+    ultra QUIET+</p>		
<b>Protection cover:</b>		
Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood /Rebate does not apply on this item. This is the actual purchase price./		140
<b>Self-regulating heating cable:</b>		
230V/4m/64W, Euro plug 2m, IP68 /Rebate does not apply on this item. This is the actual purchase price./		28.50



1550 mm  
942 mm  
360 mm



Protection cover



Cable

**EURO PALETTE** packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)



24.4 kW  
80 m<sup>3</sup>

## HP 2400 PREMIUM Split

Cover	COP	Heating output	Cooling output
metal	6.5 - 8.5 (A26 W26)*	22.2-28.8 kW (A26 W26)*	21.7 kW (A30 W35)*

30.1kW  
120 m<sup>3</sup>

## HP 3000 PREMIUM Split

COP	Heating output	Cooling output
6.5 - 8.5 (A26 W26)*	27.4-35.5 kW (A26 W26)*	26.8 kW (A35 W28)*

**FULL YEAR**  
-15~40°C

**TROPICAL**  
-5~60°C



### HP 2400 PREMIUM S




EXCHANGER  
EQUIPPED with  
**1.2m<sup>2</sup>**  
of TITANIUM

### HP 3000 PREMIUM S



EXCHANGER  
EQUIPPED with  
**1.4m<sup>2</sup>**  
of TITANIUM



#### Basic equipment:

- Air unit (including GoldFin) + Hydro kit (without box)
- Full year operation down to -15°C, (including complete Winter package: condensate tray defrost, winter module),
- Tropical kit allowing operations up to +60°C ambient air,
- Water cooling down to +5°C (chiller),
- Wi-Fi by standard TUYA IOT based App for iOS/Android Smart "POOL VISION",
- Remote wall controller including 30m cable,
- Thermally insulated water exchanger,
- User's manual

micro COMPRESSOR +

micro ECONOMY +

anti VIBRATION +

anti FREEZE +

ultra QUIET +

#### Protection cover:

Heavy duty waterproof UV resistant cover - tarpaulin made of truck cloth with long livelihood  
/Rebate does not apply on this item. This is the actual purchase price./

120



Protection cover



EURO PALETTE packed, FUMIGATED

**15.50€/1pc**

(Depending on the model it is possible to pack more units on EUP (2-6pcs).)

**TROPICAL**  
ALLOWING HEAT PUMP USAGE  
IN AMBIENT AIR FROM **+42°C**  
TO **+60°C**.



v. 02/2022

**MICROWELL**

60kW 260 m <sup>3</sup> <b>iMax 60</b>				115kW 520 m <sup>3</sup> <b>iMax 110</b>		
Cover	COP	Heating output	Cooling output	COP	Heating output	Cooling output
ABS plastic	10.5 (A27 W27)*	60.2 kW (A27 W27)*	26.8 kW (A35 W28)*	10.0 (A27 W27)*	115.0 kW (A27 W27)*	53.5 kW (A35 W28)*



**iMax 60 HC**  
**iMax 110 HC**



Basic equipment:	Model:	Price EXW /* w/o VAT /EUR/
Heat pump, user's manual		
Operating air temperature: <b>-10°C ~ +43°C</b>	60 kW <b>iMax 60</b>	<b>7 500</b>
	115 kW <b>iMax 110</b>	<b>12 600</b>



iMax 60

**iMax 60 Tropical HC**  
**iMax 110 Tropical HC**



Basic equipment:	Model:	Price EXW /* w/o VAT /EUR/
Heat pump, user's manual		
Operating air temperature: <b>0°C ~ +55°C</b>	60 kW <b>iMax 60</b>	<b>8 600</b>
	115 kW <b>iMax 110</b>	<b>15 500</b>



iMax 110

/\* Final prices. General discount does not apply on these items.

EURO PALETTE packed, FUMIGATED  
**15.50€/1pc** (Depending on the model it is possible to pack more units on EUP (2-6pcs).)

**Designed for public /commercial applications such as public pools, hotel pools, school pools.**

125m<sup>3</sup> – 520m<sup>3</sup> Pool Available

# Pool Heat pump

## COMMERCIAL INVERTER MAX




125m<sup>3</sup> - 520m<sup>3</sup> Pool Available

**Commercial Inverter Max line is primarily designed for public/commercial applications such as public pools, hotel pools, school pools.**

**They provide cutting edge Inverter technology and can serve a pool of up to 520m<sup>3</sup> with one unit. Multiple units could be used to serve bigger volumes.**



Wi-Fi Built-in Touch Controller

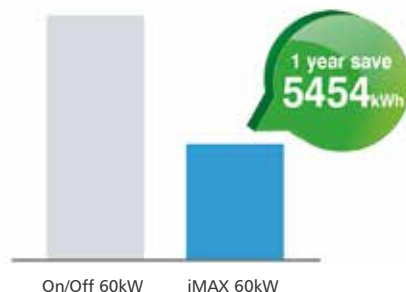



# ACCESSORIES & Spare parts

---

Measurement and regulation  
Installation material and equipment  
Spare parts  
Water surface covering  
Ventilation

**The widest selection of finishes  
and accessories.**

**Benefits that customers desire**

Based on close relationship with customers, Microwell provides functionality through matchless selection of accessory options.



# Qmax - Heat pump TESTER

Save up to  
**30%**  
on energy  
bill



FOR SETTING THE QUALITY  
**of pool performance**

ACCESSORIES & Spare parts

**Carry-on measurement device designed to provide measurement and optimization of heat pump's performance and efficiency**

**Price EXW**  
w/o VAT /EUR/

**Basic equipment:**

- Carry on measurement device with inductive flow meter KROHNE Optiflux 2050 with connection DN50
- A pair of mobile WIKA Pt100 resistance thermometers
- Measurement device



**1. Qmax-TESTER**


**measures:** water temperature inlet & outlet, true heating or cooling output, heat pump power consumption, water flow  
**counts:** Coefficient of performance /COP/, Energy efficiency ratio /EER/

**2 890**

**2. Heat pump's OPTIMIZATION**

executed by a Microwell trained technician

**99**



**IMMEDIATE TESTING**  
OF A HEAT PUMP



**COMPATIBLE**  
WITH ALL 1 PHASE HP

WATCH VIDEO & LEARN MORE



/General discount does not apply on above stated prices.  
Stated prices are final./



# 1. FLOAT SWITCHES FOR EQUALIZING TANKS

Float switches for equalizing tanks	Price EXW w/o VAT /EUR/
-------------------------------------	----------------------------

## 1.1. NIVOCONT - conductive level switch

1.1.A KSN-201 - probe from stainless steel	33.60
--	-------


1.1.B KRK-512-5 - relay	47.30
-------------------------	-------

## 1.2. NIVOFLOAT - plastic level switch

1.2.A NLP-110 - plastic level float switch (PVC cable 10m)	31.80
--	-------

## 1.3. NIVOPOINT - multiple switching point magnetic level switch:

1.3.A MRA-210-3 - multiple switching point level switch with wetted parts from stainless steel (1" thread, 2 switching points, probe tube 1m)	204.00
---	--------

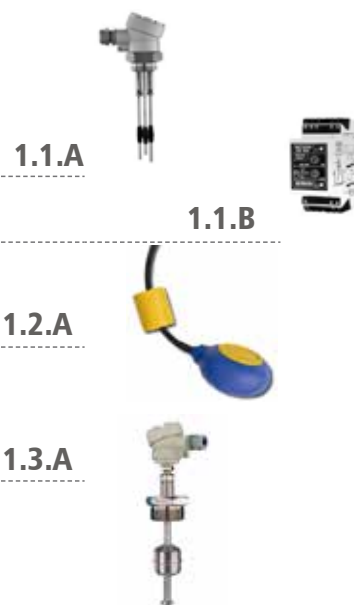

# 2. HUMIDITY AND TEMPERATURE METER in 1

Device for indoor humidity and temperature measuring	Price EXW w/o VAT /EUR/
--	----------------------------

## 2.1. Thermo-humidistat BEURER HM 16

Humidity 20% to 95% Air temperature 0°C ~ +50°C Selection °C/°F Wall installation / flipping holder Well readable display Measurement accuracy ± 5% Battery 1x 1.5V	14.40
---	-------



## 2.2. PROFESSIONAL- GFTH 95 (professional application)

Humidity measurement accuracy: ± 1,5% 1 line LCD Battery included 1x 9V, typ IEC 6F22 Body: ABS	153.00
--	--------



/Change in price and offered products reserved./

### 3. HUMIDITY VISUALIZATION



microLIGHT+

Price EXW  
w/o VAT /EUR/

#### 3.1. microLIGHT+ INFINITY

Operational temperature range: 0°C ... +60°C.  
Compatibility: All DRY range

3.1.A microLIGHT+ INFINITY, length 1 m	183.00
3.1.B microLIGHT+ INFINITY, length 3 m	213.00
3.1.C microLIGHT+ INFINITY, length 5 m	228.00

#### 3.2. microLIGHT+ LAMP

A freestanding table lamp.  
MicroLIGHT+ LAMP measures and automatically reflects current relative humidity, changing the colour gradient between blue, green and red colour.

3.2.A microLIGHT+ LAMP	105.00
------------------------	--------

/Change in Lamp model reserved./

#### 3.3. microSTEAM+

Operational temperature range: 0°C ... +120°C.  
Designed for ceilings of the swimming pool halls as LED humidistat for saunas.

3.3.A microSTEAM+, length 1 m	229.00
3.3.B microSTEAM+, length 2 m	253.00



ACCESSORIES & Spare parts


Low humidity 0-40% RH

Ideal humidity 40-60% RH

High humidity 60-100% RH

microLIGHT+

Integrated LED light strip indicating current humidity in a pool. Light spectrum from blue (humidity low) through green (all OK) to red (problem – humidity high) in full color gradient.

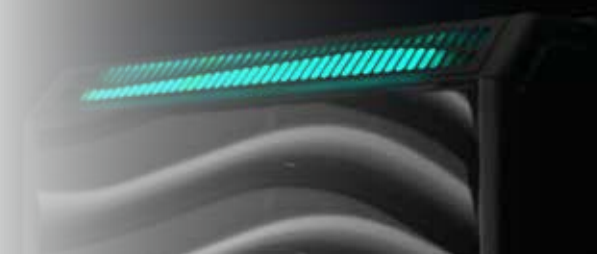


## 4. FLOOR GRILLS

Price change reserved

*/Actual price to be quoted based on an individual enquiry./* **Price EXW**  
w/o VAT /EUR/

### 4.1. Basic structure


<b>4.1.A</b> Symmetrical ASS	from <b>154.00</b>
<b>4.1.B</b> Asymmetrical ASU	from <b>160.00</b>
<b>4.1.C</b> Asymmetrical removable ASR	from <b>207.00</b>
<b>4.1.D</b> LED Asymmetrical removable ASR	from <b>352.00</b>

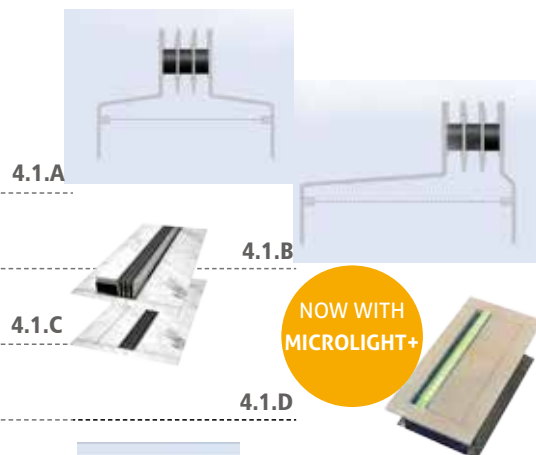

NOW WITH  
MICROLIGHT+


### 4.2. Fixation

<b>4.2.A</b> Mounting rail AS-BF	from <b>34.50</b>
<b>4.2.B</b> Substructure channel AS-UBK	from <b>252.00</b>

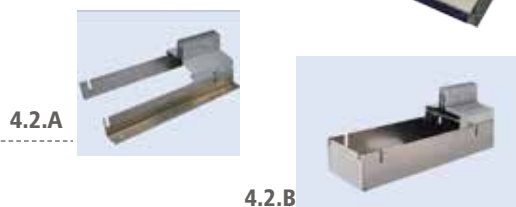

### 4.3. Accessories

<b>4.3.A</b> Comer AS-GS	from <b>69.90</b>
<b>4.3.B</b> Diffuser AS-DLV	from <b>11.40</b>
<b>4.3.C</b> Construction works protection cover AS-AP	from <b>6.50</b>
<b>4.3.D</b> Cut out for substructure channel AS-UBK-A	from <b>13.00</b>
<b>4.3.E</b> Substructure channel socket AS-UBK-ZSR	from <b>28.40</b>
<b>4.3.F</b> Side cut out with socket for mounting rail or substructure channel AS-UBK-ZS	from <b>28.40</b>
<b>4.3.G</b> End cover AS-END	from <b>16.80</b>
<b>4.3.H</b> Condensate drain for substructure channel AS-UBK-AS	from <b>47.00</b>

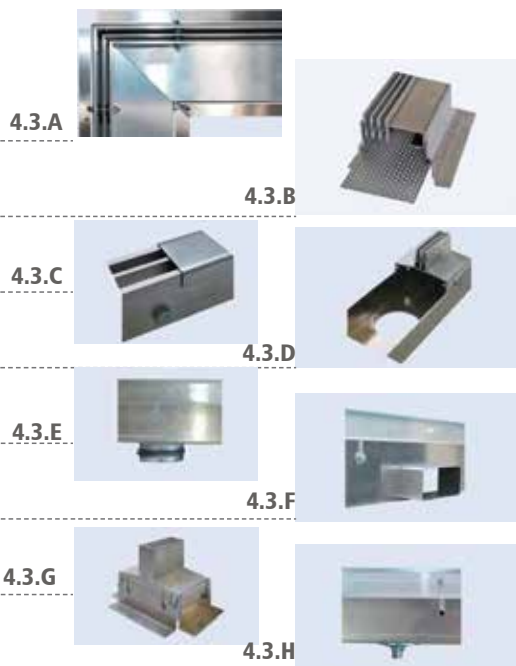

*/Price change reserved./*



## 5. INSTALLATION MATERIAL

5.1 for SWIMMING POOL DEHUMIDIFIERS installation		unit	Price EXW w/o VAT /EUR/
<b>5.1.1. Pumps and accessories</b>			
5.1.1.A	Pump SI 83 – condensing, with tank 2l, 500l/h, max. 4.2m /No. 7012/	1 pc	<b>75.00</b>
5.1.1.B	Condensate hose 16mm /No. 7100/	1 standard meter	<b>0.95</b>
<b>5.1.2. Cleaning and disinfection appliances</b>			
5.1.2.A	Easy Care spray – evaporator cleaner and disinfection /No. 5008/	1 pc	<b>14.10</b>
<b>5.1.3. In-wall condensate siphons</b>			
5.1.3.A	In-wall condensate siphon, DN32/20 /No. 7103/	1 pc	<b>30.00</b>
<b>5.1.4. Anti odor siphons</b>			
5.1.4.A	Siphon (anti-odor trap) for condensation hose /No. 7102/	1 pc	<b>7.00</b>



5.2 for SWIMMING POOL HEAT PUMP installation		unit	Price EXW w/o VAT /EUR/
<b>5.2.1. Copper pipes</b>			
5.2.1.A	for HP1000 GREEN (On-Off) SPLIT Insulated double copper pipes DUO 6+12 (1/4" + 1/2" x 0.8) - <b>25m package</b> /No. 2011/	1m	<b>5.21</b>
5.2.1.B	for HP1100 GREEN INVERTER Pro SPLIT Insulated double copper pipes DUO 6+10 (1/4" + 3/8" x 0.8) - <b>25m package</b> /No. 2010/	1m	<b>4.46</b>
5.2.1.C	for HP1400 GREEN (On-Off), HP1500/1700/2100 GREEN Inverter Pro SPLIT Insulated double copper pipes DUO 10+16 (3/8" x 5/8") - <b>25m package</b> /No. 2012/	1m	<b>9.82</b>
5.2.1.D	for HP2300/2800 INVENTOR, HP2400/3000 PREMIUM, HP2700 GREEN INVERTER Pro SPLIT Insulated copper pipes d10 (3/8" x 1.0)- <b>50m package</b> /No. 2003/ + insulated copper pipes d18 (3/4" x 1.0)- <b>25m package</b> /No. 2007/	1m	<b>10.60</b>
5.2.1.E	for DRY SIREN Insulated copper pipes d12 (1/2" x 1.0)- <b>50m package</b> /No. 2005/ + insulated copper pipes d10 (3/8" x 1.0)- <b>50m package</b> /No. 2003/	1m	<b>7.71</b>



<b>5.2.2. Insulation tape</b>			
5.2.2.A	A self-adhesive insulation tape K-flex white /No. 2016/	1 pc	<b>13.40</b>
<b>5.2.3. Consoles and base blocks</b>			
5.2.3.A	Console White - 700 /No. 6004/, 2 pcs	set	<b>44.00</b>
5.2.3.B	Base installation block 450 – white, carrying capacity 200kg, 2pcs /No. 6055/, with Side covers, 4 pcs /No. 6061/	set	<b>8.60</b>
5.2.3.C	Rubber base installation block 400 - black, carrying capacity 200kg, 2pcs /No. 6065/ <b>Compatibility:</b> HP1000-1400 GREEN, HP1100-1500 GREEN INVERTER Pro	1 pc	<b>13.20</b>
5.2.3.D	Rubber base installation block 600 - black, carrying capacity 200kg, 2pcs /No. 6066/ <b>Compatibility:</b> HP1700-2100-2700 GREEN INVERTER Pro, HP2300-3000	1 pc	<b>17.90</b>
5.2.3.E	Antivibration silentblocks, 4pcs /No. 6023/	set	<b>16.80</b>



/Price change reserved./

General discount does not apply on above stated prices. Stated prices are final.



## 6. EQUIPMENT FOR INSTALLATION AND SERVICE

Price change reserved

Price EXW  
w/o VAT /EUR/

### 6.1. Vacuum pump

**6.1.A** Vacuum pump Rothenberger ROAIRVAC 6,0 - 170l/min **325**

6.1.A



**6.1.B** Refco - ENVIRO DUO OS, recovery station with oil separation - 4687035, gas 33kg/h, liquid 210 kg/h, Push pull 570kg/h **1 140**

6.1.B



### 6.2. Charging and testing hoses Refco

**6.2.A** Premium with closure valve, length 90cm **50**

**6.2.B** Premium with closure valve, length 150cm **60**

6.2.A|B



### 6.3. Manifold valve Refco

**6.3.A** for refrigerant R410, R32 **95**

6.3.A

**6.3.B** for refrigerant R22, R407, R410 **85**

6.3.B



### 6.4. Eccentric flare tool

**6.4.A** Eccentric flare tool Rothenberger, with 1" flare matrix, 222402 **150**

6.4.A

**6.4.B** Eccentric flare tool REFCO, with 1" flare matrix in small suitcase, RF888Z **120**

6.4.B

**6.4.C** Eccentric flare tool REFCO, flare matrix and cutter in small suitcase, RF275FS **90**

6.4.C

**6.4.D** Flare tool Rothenberger with expanding - 1" packet **55**

6.4.D



### 6.5. Expanders

**6.5.A** Expander Rothenberger 3/8, 1/2, 5/8, 3/4, 22, 28 - 1" packet, 12320 **340**

6.5.A



### 6.6. Cutters

**6.6.A** Cutter Rothenberger MINIMAX 3 - 28mm, 70015 **25**

6.6.A

**6.6.B** Cutter Rothenberger TC 35, 6- 35mm, 70027 **30**

6.6.B



### 6.7. Tube benders

**6.7.A** Tube bender Rothenberger TBM 3/8, 1/2, 5/8, 3/4, 7/8, 23022X **225**

6.7.A



### 6.8. Charging scales

**6.8.A** Charging scale Rothenberger to 120kg - accuracy 2g, 173004 **275**

6.8.A

**6.8.B** Charging scales TST **170**

6.8.B



/Price and model change reserved./

# 7. WATER CONNECTION PACKET

Price change reserved



for HEAT PUMP CONNECTION to pool water circuit

	/Price for the whole set/	Price EXW w/o VAT /EUR/
<b>7. 1.</b>	<b>WATER CONNECTION PACKET for HP Premium, Inventor</b>	<b>120.00</b>
<b>7. 2.</b>	<b>WATER CONNECTION PACKET for HP Green, Green Inverter Pro</b>	<b>110.00</b>



1 Pressure hose d50, length 10m /No. 211055/

2 PVC tube d50, length 0.8m /No. 211061/

3 Tube holder, open, d50, 8pcs /No. 211050/

4 Hose nut / Swivel for glue d50 x external thread 1 1/2", 2pcs /No. 211049/

5 PVC tube knee 90° for glue, 8pcs /No. 211046/

6 Swivel with valve for glue d50, 3pcs /No. 211048/

7 PVC "T" piece 90° for glue d50, 2pcs /No. 211047/

8 Glue Tangit PVC-U, 250g /No. 211051/

9 Cleaner Tangit 125 ml /No. 211052/

10 Sealing fibre Tangit Uni-Lock, 1 package /No. 211054/

11 Teflon tape 12 mm/12 m /No. 211053/

12 Screw fasteners with screws, 8pcs, dimensions: 10x48mm /No. 206013/

13 Screw fasteners with screws, 8pcs, dimensions: 6x70mm /No. 206023/

14 Cardboard box, 800x600x600 mm /No. 210005/

/Price change reserved./

General discount does not apply on above stated prices. Stated prices are final.



**SMART PURCHASE**  
Buy the whole set.



/Picture is illustratory./

ACCESSORIES & Spare parts

## 8. SPARE PARTS

### 8.A.

### DEHUMIDIFIER SPARE PARTS

Price EXW  
w/o VAT /EUR/

#### Compressors and capacitors

<b>103001</b>	Compressor DRY 300: including siphon, silentblocks, heat protection, cover, Daikin OEM	<b>305</b>
<b>112003</b>	Compressor DRY 300: including siphon, silentblocks, heat protection, cover, LG	<b>485</b>
<b>103008</b>	Compressor DRY 500: including siphon, silentblocks, heat protection, cover, Daikin OEM	<b>415</b>
<b>112004</b>	Compressor DRY 500: including siphon, silentblocks, heat protection, cover, LG	<b>575</b>
<b>103015</b>	Compressor DRY 800: including siphon, silentblocks, heat protection, cover	<b>840</b>
<b>103016</b>	Compressor DRY 1200: including siphon, silentblocks, heat protection, cover	<b>1 065</b>
<b>103005</b>	Compressor capacitor DRY 300: 30µF 400/450V	<b>8</b>
<b>103324</b>	Compressor capacitor DRY 400: 40µF 400/450V	<b>8</b>
<b>103011</b>	Compressor capacitor DRY 500: 35µF 400/450V	<b>8</b>
<b>103017</b>	Compressor capacitor DRY 800: 45µF 400/450V	<b>10</b>
<b>103018</b>	Compressor capacitor DRY 1200: 50µF 400/450V	<b>10</b>



#### Fans

<b>103002</b>	Fan for DRY 300-400-500-800-1200. DRY300-400 - 1pc/dehumidifier, DRY500-800-1200 2pcs/dehumidifier	<b>142</b>
<b>103009</b>	Fan for DUCT DRY 500-800-1200	<b>175</b>
<b>103012</b>	Fan capacitor DUCT DRY 500-800-1200: 3.5µF 400/450V	<b>10</b>
<b>103057</b>	Fan switch PERIODICAL/CONTINUOUS	<b>2</b>



#### Humidistats

<b>103022</b>	Humidistat & Thermostat DIGITAL (FOX-2SHTR) BUILT-IN SILVER, METAL a DUCT	<b>126</b>
<b>103020</b>	Mechanical built-in humidistat /rotary/ ALL DEHUMIDIFIER MODELS	<b>29</b>
<b>103021</b>	Indication wheel for rotary humidistat / ALL DEHUMIDIFIER MODELS	<b>2</b>
<b>103026</b>	Mechanical external rotary humidistat EBERLE HYG-6001	<b>80</b>
<b>103028</b>	Mechanical external rotary humidistat EBERLE HYG-7001	<b>85</b>
<b>RHT-RX</b>	Receiver for wireless humidistat & thermostat DRY EASY 300	<b>70</b>
<b>RHT-TX-2</b>	Transmitter for wireless humidistat & thermostat DRY EASY 300	<b>215</b>
<b>RHT-ANT</b>	Antenna for wireless humidistat & thermostat DRY EASY 300	<b>60</b>





## 8. SPARE PARTS

### 8.A.

#### DEHUMIDIFIER SPARE PARTS

Price EXW  
w/o VAT /EUR/

##### Valves and relays

<b>103004</b>	LP valve - DRY 300/400	<b>19</b>
<b>103010</b>	LP valve - DRY 500/800/1200	<b>19</b>
<b>103059</b>	Time relay JEL-111 - ALL DEHUMIDIFIER MODELS	<b>35</b>
<b>103058</b>	Power relay SCHRACK - DRY 300/400/500/800/1200	<b>18</b>
<b>103069</b>	Power relay OMRON DRY 800/1200	<b>15</b>
<b>108001</b>	Filling valve d6/100mm, SAE 1/4" ALL DEHUMIDIFIER MODELS	<b>3</b>
<b>103019</b>	Antifreeze thermostat +15°C	<b>35</b>



##### Capillaries

<b>108006</b>	Capillary DRY300, length: 1m	<b>3.50</b>
<b>108016</b>	Capillary TEEX 2.0, DRY400	<b>3.50</b>
<b>108006</b>	Capillary DRY500, length: 2.6 m	<b>8.50</b>
<b>112001</b>	Capillary DRY800	<b>3.00</b>
<b>112002</b>	Capillary DRY1200	<b>4.00</b>




##### Refrigerant filters and air filters

<b>108015</b>	Refrigerant Filter DRY300	<b>3.50</b>
<b>108020</b>	Refrigerant Filter DRY400/500	<b>3.50</b>
<b>108022</b>	Refrigerant Filter DRY800/1200	<b>13.50</b>
<b>F1</b>	Air Filter DRY300/400 TTW, G3	<b>5.00</b>
<b>F2</b>	Air Filter DRY500 TTW, G3	<b>5.00</b>
<b>F3</b>	Air Filter DRY800/1200 TTW, G3	<b>5.00</b>
<b>F4</b>	Air Filter DRY300/400 DUCT, G3	<b>6.00</b>
<b>F5</b>	Air Filter DRY500 DUCT, G3	<b>7.00</b>
<b>F6</b>	Air Filter DRY800/1200 DUCT, G3	<b>9.00</b>



General discount does not apply on above stated prices.  
Stated prices are final.

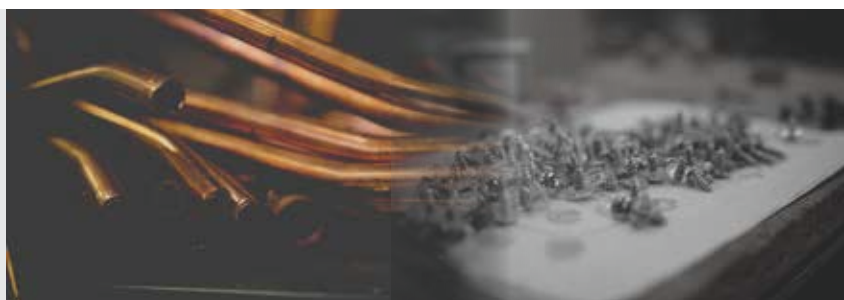

## 8. SPARE PARTS

### 8.B.

### HEAT PUMP SPARE PARTS

Price EXW  
w/o VAT /EUR/

#### Flow switch

<b>203005</b>	Flow switch HP1000-1100-1400-1500-1700-2300-2400-2800-3000	<b>35</b>
---------------	--	-----------

#### Exchangers

<b>204001</b>	Exchanger Omega HP 1000	<b>295</b>
---------------	-------------------------	------------

<b>204002</b>	Exchanger Omega HP 1400	<b>325</b>
---------------	-------------------------	------------

<b>HP18004</b>	Exchanger Premium HP 1100	<b>590</b>
----------------	---------------------------	------------

<b>HP18005</b>	Exchanger Premium HP 1500	<b>635</b>
----------------	---------------------------	------------

<b>204003</b>	Exchanger Inventor HP2300	<b>425</b>
---------------	---------------------------	------------

<b>204004</b>	Exchanger Inventor HP2800	<b>525</b>
---------------	---------------------------	------------

<b>HP18008</b>	Exchanger Premium HP 2400	<b>1 050</b>
----------------	---------------------------	--------------

<b>HP18009</b>	Exchanger Premium HP 3000	<b>1 190</b>
----------------	---------------------------	--------------

#### Controllers

<b>HP18010</b>	Controller - complete set HP1000, 2000, 30000, SW-SRO193026, SRO1930027	<b>199</b>
----------------	---	------------

<b>203022</b>	Controller - Transformer	<b>20</b>
---------------	--------------------------	-----------

<b>203008</b>	Controller - Wall installation box	<b>3</b>
---------------	------------------------------------	----------

#### Wi-Fi box


<b>203028</b>	WIFI box SRO193028, 2x 1m connection cable, female and male connector	<b>30</b>
---------------	---	-----------

#### Temperature sensors

<b>203011</b>	Temperature sensor T1, T2, T5 (water, evaporator) (k5Ω)	<b>3</b>
---------------	---	----------

<b>203013</b>	Temperature sensor T3 (air, plastic) (k5Ω)	<b>3</b>
---------------	--	----------

<b>203012</b>	Temperature sensor T4 (compressor)(k50Ω)	<b>3</b>
---------------	--	----------

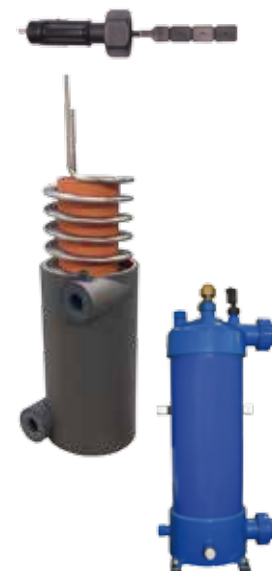

## 8. SPARE PARTS

### 8.B.

#### HEAT PUMP SPARE PARTS

Price EXW  
w/o VAT /EUR/

#### Fan blades

<b>209045</b>	Fan blade HP 1000-1100-1400-1500	<b>50</b>
<b>209035</b>	Fan blade HP 2300-2400-2800-3000	<b>50</b>

#### Compressors


<b>209083</b>	Compressor HP1000-1100, GMCC Rotary	<b>550</b>
<b>209084</b>	Compressor HP1400-1500, GMCC Rotary	<b>660</b>
<b>209090</b>	Compressor HP2300-2400, Panasonic Scroll	<b>790</b>
<b>209089</b>	Compressor HP2800-3000, Panasonic Scroll	<b>890</b>

#### Others

<b>209024</b>	4-way valve electrical coil + copper valve HP1000-1100-1400-1500	<b>30</b>
<b>209034</b>	4-way valve electrical coil + copper valve HP2300-2400-2800-3000	<b>30</b>
<b>HP18020</b>	Set of silentblocks (4pcs)	<b>18</b>
<b>HP18021</b>	Condensate drain "L" part 90°	<b>3</b>
<b>209031</b>	Phase monitor HP2000-3000	<b>60</b>



General discount does not apply on above stated prices.  
Stated prices are final.

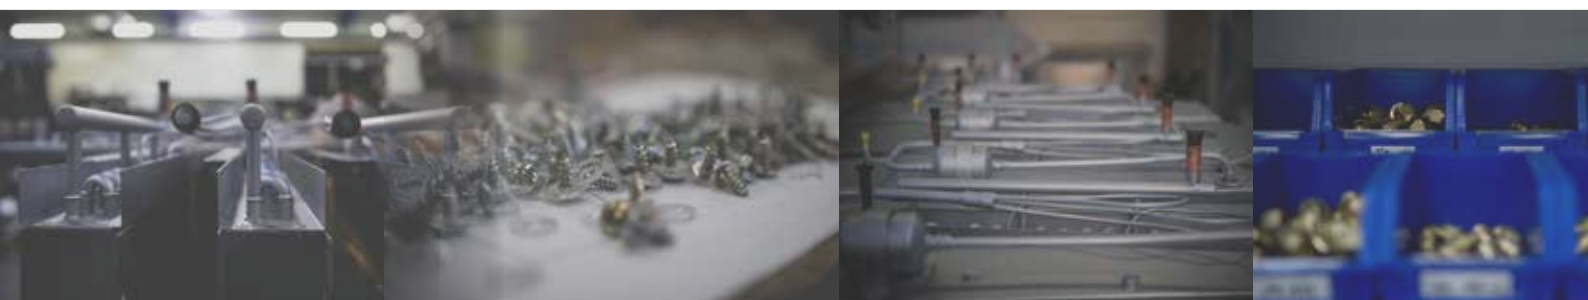

## 8. SPARE PARTS

### 8.C.

#### HEAT PUMP SPARE PARTS for models HP GREEN

Price EXW  
w/o VAT /EUR/

##### for model HP 1100 GREEN Inverter

<b>209100</b>	PC board (Heat&Cool) for HP1100 GREEN Inverter	<b>155</b>
<b>209102</b>	Round Touch controller (Heating&Cooling, with Wi-Fi) for HP1100 GREEN Inverter	<b>130</b>
<b>209104</b>	Inverter board (Heat&Cool) for HP1100 GREEN Inverter	<b>220</b>
<b>209106</b>	Water flow switch for HP1100 GREEN Inverter	<b>35</b>
<b>209108</b>	Fan motor for HP1100 GREEN Inverter	<b>115</b>
<b>209110</b>	High pressure protection switch for HP1100 GREEN Inverter	<b>15</b>
<b>209112</b>	Low pressure protection switch for HP1100 GREEN Inverter	<b>15</b>
<b>209114</b>	Water union for HP1100 GREEN Inverter	<b>20</b>
<b>209116</b>	Water union gasket for HP1100 GREEN Inverter	<b>5</b>

##### for model HP 1500 GREEN Inverter

<b>209101</b>	PC board (Heat&Cool) for HP1500 GREEN Inverter	<b>155</b>
<b>209103</b>	Round Touch controller (Heating&Cooling, with Wi-Fi) for HP1500 GREEN Inverter	<b>130</b>
<b>209105</b>	Inverter board (Heat&Cool) for HP1500 GREEN Inverter	<b>220</b>
<b>209107</b>	Water flow switch for HP1500 GREEN Inverter	<b>35</b>
<b>209109</b>	Fan motor for HP1500 GREEN Inverter	<b>115</b>
<b>209111</b>	High pressure protection switch for HP1500 GREEN Inverter	<b>15</b>
<b>209113</b>	Low pressure protection switch for HP1500 GREEN Inverter	<b>15</b>
<b>209115</b>	Water union for HP1500 GREEN Inverter	<b>20</b>
<b>209117</b>	Water union gasket for HP1500 GREEN Inverter	<b>5</b>

##### for model HP 1000 GREEN On-Off

<b>209118</b>	PC board (Heat&Cool) for HP1000 GREEN	<b>145</b>
<b>209120</b>	LCD controller (Heat&Cool) for HP1000 GREEN	<b>85</b>
<b>209122</b>	Water flow switch for HP1000 GREEN	<b>35</b>
<b>209124</b>	Fan motor for HP1000 GREEN	<b>65</b>
<b>209126</b>	Full set of sensors for HP1000 GREEN	<b>8</b>
<b>209128</b>	High & low pressure switch for HP1000 GREEN	<b>15</b>
<b>209130</b>	Water union 500mm black for HP1000 GREEN	<b>20</b>
<b>209132</b>	Water union gasket for HP1000 GREEN	<b>5</b>
<b>209134</b>	Drainage kit for HP1000 GREEN	<b>8</b>
<b>209136</b>	Fan for HP1000 GREEN	<b>28</b>

##### for model HP 1400 GREEN On-Off

<b>209119</b>	PC board (Heat&Cool) for HP1400 GREEN	<b>145</b>
<b>209121</b>	LCD controller (Heat&Cool) for HP1400 GREEN	<b>85</b>
<b>209123</b>	Water flow switch for HP1400 GREEN	<b>35</b>
<b>209125</b>	Fan motor for HP1400 GREEN	<b>65</b>
<b>209127</b>	Full set of sensors for HP1400 GREEN	<b>8</b>
<b>209129</b>	High & low pressure switch for HP1400 GREEN	<b>15</b>
<b>209131</b>	Water union 500mm black for HP1400 GREEN	<b>20</b>
<b>209133</b>	Water union gasket for HP1400 GREEN	<b>5</b>
<b>209135</b>	Drainage kit for HP1400 GREEN	<b>8</b>
<b>209137</b>	Fan for HP1400 GREEN	<b>28</b>



## 9. WATER SURFACE COVER

Price change reserved

A swimming pool cover reduces the actual evaporation by 30-50%. This means that you need a smaller dehumidifier for a given pool, you will save on energy bill since smaller unit consumes less electricity and also you will reduce heat losses of your water, thus you will need smaller heating device (heat pump) and also it will consume less energy compared to pool without cover.

Blue bubble plastic cover is a perfect solution for a domestic or hotel pool.



### 9.1 POOL COVER ROLLER

Price EXW

w/o VAT /EUR/

#### 9.1.1. Pool cover roller - FIXED POSITION

9.1.1.A with telescopic tube length 2.7 - 4.4m **188**

9.1.1.B with telescopic tube length 3.7m - 5.4m **208**

9.1.1.C with telescopic tube length 4.1m - 5.7m **185**

9.1.1.D with telescopic tube length 5.3m - 6.9m **210**

#### 9.1.2. Pool cover roller - MOBILE

9.1.2.A with telescopic tube length 2.7 - 4.4m **200**

9.1.2.B with telescopic tube length 3.7m - 5.4m **218**

#### 9.1.3. Pool cover roller - SIDEWISE MOBILE

9.1.3.A with telescopic tube length 2.7 - 4.4m **250**

9.1.3.B with telescopic tube length 3.7 - 5.4m **275**

#### 9.1.4. Pool cover roller - STANDING

9.1.4.A with telescopic tube length 2.7 - 4.4m **190**

9.1.4.B with telescopic tube length 3.7m - 5.4m **205**

#### 9.1.5. Pool cover roller - FIXED ON THE WALL

9.1.5.A with telescopic tube length 2.6 - 4.3m **280**



### 9.2 BLUE BUBBLE PLASTIC SHEET

Price EXW

w/o VAT /EUR/


400 micr., 50m reel up, Light blue Geo Bubble material /m/

9.2.A width 3m **16.50**

9.2.B width 3.5m **19.50**

9.2.C width 4m **22.50**

9.2.D width 5m **27.50**



General discount does not apply on above stated prices. Stated prices are final.



# 10. VENTILATION

up to  
**300 m³/h**

**FREE**  
heated

## Fan scheme



**Price EXW**  
w/o VAT /EUR/

## 10.1. EXHAUST ventilation set

### 10.1.A Ventilation set A: Air flow: 100m³/h, Ø 100mm

Includes:

- Small axial extract fan DECOR 100
- Backdraft shutters RSK 100 ED
- Plastic external louvre LG100
- Plastic circular hose UK-PP 100/1000

**100**



### 10.1.B Ventilation set B: Air flow: 300m³/h, Ø 160mm

Includes:

- Small axial extract fan DECOR 300 SZ IPX4
- Backdraft shutters RSK 150 ED
- Plastic external louvre LG 150
- Plastic circular hose UK-PP 150/1000

**150**

**Price EXW**  
w/o VAT /EUR/

## 10.2. FRESH AIR ventilation set

### 10.2.A FRESH AIR ventilation set A: with Fixed plastic external louvre

- Air flow: 100-300m³/h, Ø 100mm
- white color - RAL 9010
- Includes: Plastic circular hose LG100, Plastic circular hose UK-PP 100/1000

**40**



### 10.2.B FRESH AIR ventilation set B: with Electric plastic back draft louvre shutter


- Air flow: 100-300m³/h, Ø 100mm
- grey color - RAL 7035
- Includes: External electric louvre PAR 160 RAL7035, Plastic circular hose UK-PP 100/1000

**350**



10.2.A  
10.2.B

## Installation scheme

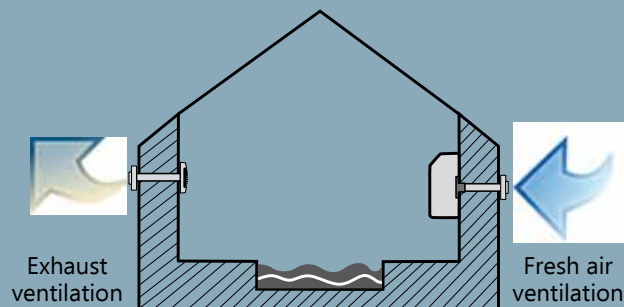

Bring fresh air into  
your pool  
and warm it with  
the dehumidifier.



## Our Innovation: **FRESH AIR SUPPLY**



Each Microwell dehumidifier has fresh air supply possibility. The air inlet is located under the condenser, that way the incoming fresh air is effectively heated at no cost thanks to heat recovery.



### ADDITIONAL VENTILATION

Saving energy,  
time & money



*Fresh air metal extension for connection to dehumidifier*



*Plastic circular hose*



*Plastic external louver*

Compatibility to All DRY range.

## MICROWELL, spol. s r.o.

SNP 2018/42, 927 01 Šal'a, SLOVAKIA

p (+421) 31/770 7082

m (+421) 911/413 990

e export@microwell.sk



[www.microwell.eu](http://www.microwell.eu)



---

### Branch office PRAHA

Hlavní 1195

251 68 Hlubočinka - Sulice, CZ

m (+420) 773 621 599

m (+420) 608 855 364

e praha@microwell.cz

[www.microwell.cz](http://www.microwell.cz)

### Branch office BRNO

Bohunická 81

619 00 Brno, CZ

p (+420) 549 257 241

m (+420) 608 855 364

e brno@microwell.cz

[www.microwell.cz](http://www.microwell.cz)

### Branch office OSTRAVA

Slévárenská 411/12

709 00 Ostrava, CZ

p (+420) 596 638 227

m (+420) 608 855 364

e ostrava@microwell.cz

[www.microwell.cz](http://www.microwell.cz)

### Branch office BUDAPEST

Attila út 4.

1013 Budapest, HU

m (+36) 30 875 58 51

e microwell@microwell.hu

[www.microwell.hu](http://www.microwell.hu)

*Manufacturer reserves the right to change the technical and visual parameters without notice.*

